



CATALOG NO.	20166
EDITION	2024
SUPERSEDES	20166 (2014)

THERMOPLASTIC POLYURETHANE BELT PROGRAM

PRODUCT AND TECHNICAL INFORMATION



INDEX

INTRODUCTION	2	BACKINGS	99
POLYURETHANE BELTS	3	POLYURETHANE BACKINGS	100
TOOTH PROFILES	4	RUBBER BACKINGS	101
MATERIALS	6	FOAM BACKINGS	102
GATES TPU PRODUCTS	7	PVC BACKINGS	103
HOW TO ORDER	8	SPECIAL BACKINGS + FABRIC	104
SYNCHRO-POWER LINEAR	10	PROFILE BELTS	105
T PITCHES	11	PROFILE BELT DESIGN RECOMMENDATIONS	106
AT PITCHES	16	PROFILE SELECTOR	110
HTD PITCHES	22	FABRICATION CAPABILITIES	111
HPL PITCHES	27	TECHNICAL DESIGN	113
STD PITCHES	30	CALCULATION OF CONVEYING APPLICATIONS	115
GPP PITCHES	32	CALCULATION OF LINEAR POSITIONING APPLICATIONS	117
SST PITCHES	36	CALCULATION OF OMEGA LINEAR POSITIONING APPLICATIONS ...	119
IMPERIAL PITCHES	38	CALCULATION OF LIFTING APPLICATIONS:	
E-BELT	42	TWO PULLEYS NO COUNTER WEIGHT	121
WR-WATER RESISTANT BELTS	43	CALCULATION OF LIFTING APPLICATIONS:	
WR PITCHES	44	TWO PULLEYS WITH COUNTER WEIGHT	123
SELF-TRACKING BELTS	48	CALCULATION OF LIFTING APPLICATIONS:	
FOR METRIC TOOTH PITCH BELTS	49	ONE PULLEY WITH COUNTER WEIGHT	125
FOR IMPERIAL TOOTH PITCH BELTS	49	CALCULATION OF CLOSED BELT APPLICATIONS	127
T PITCHES	50	9. ELONGATION / POSITIONING ERROR IN TIMING BELT DRIVES ...	129
AT PITCHES	53	10. TIMING BELT INSTALLATION	129
HV PITCHES	58	SONIC TENSION METER	130
SYNCHRO-POWER FLAT	61	NOTES	131
F PITCHES	62	LEGAL	132
LRB-77 LIVE ROLLER DRIVE BELT	65		
LRB-45 LIVE ROLLER DRIVE BELT	66		
CLAMP CONNECTION FIX-FLAT	67		
SYNCHRO-POWER WIDE	68		
GMT3	69		
WT PITCHES	70		
WHTD PITCHES	72		
WSTD PITCHES	73		
IMPERIAL PITCHES	74		
CC8	75		
SYNCHRO-POWER SLEEVE	76		
T PITCHES	77		
AT PITCHES	82		
SYNCHRO-POWER FLEX	84		
T PITCHES	85		
AT PITCHES	88		
HTD PITCHES	93		
IMPERIAL PITCHES	97		
ENDLESS WELDED OR TRULY ENDLESS?	98		

INTRODUCTION

OUR EXPERTISE

Gates TPU brings a world-class combination of expert knowledge, global coverage, and superior service to exceed our customers' expectations. Backed by 100 years of Gates innovation and industry leading product performance and quality, we offer the most compelling thermoplastic polyurethane belt portfolio in the market.

Our products are used in various industries including material handling, intralogistics, general automation, and food processing.



KNOWLEDGE

APPLICATION KNOW-HOW

Our technical experts will work with your team to deliver a solution that meets your application need.

EXPERTISE

Our dedicated team can answer questions, provide training and information, and solve challenges.



EXPERIENCE

RESPONSIVENESS

Our regional teams are flexible, close to the market, and able to provide hands on service at customer sites.

DELIVERY

With a global production and distribution footprint, including distribution partners worldwide, Gates offers global service to solve your challenges. Exceptional on time delivery performance and short lead times set the standard in the industry.



PRODUCT

QUALITY

Our products deliver the performance and reliability that customers expect from Gates around the world. We guaranty the highest quality, meeting & exceeding the standards of ISO 9001, ISO 14001 and ISO 50001.

OFFERING

We offer a full TPU belt portfolio for all positioning, conveyance, and lifting applications.



SUSTAINABILITY

HUMAN HEALTH

Gates products comply with the requirements laid down in the REACH (Registration, Evaluation, Authorization of Chemical Substances) regulation. All substances in our belts requiring registration will be duly registered in the central database run by the European Chemicals Agency (ECHA).

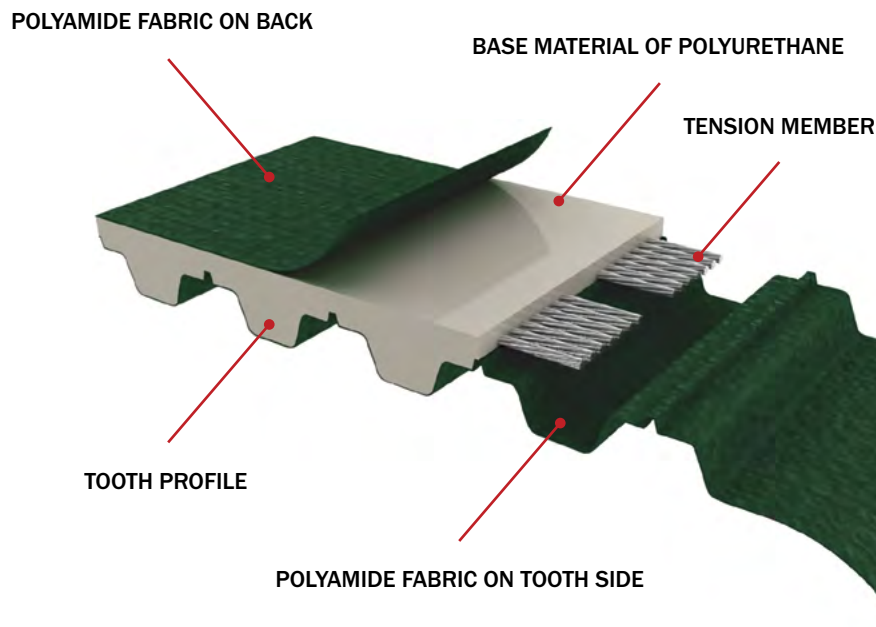
ENVIRONMENT

Gates products help preserving our planet by saving energy, less environmental impact, less noise pollution, less waste.

POLYURETHANE BELTS

OUR PRODUCT QUALITY IS REVEALED IN THE DETAILS. — NARROW TOLERANCES AND PERFECT TOOTH ENGAGEMENT ARE GUARANTEED.

Gates TPU Polyurethane Timing Belts are made from high quality, abrasion-resistant polyurethane in combination with high strength steel or aramid cords. Nearly every extruded belt type can be additionally customized by special machining or the addition of various coatings or profiles.



ATTRIBUTES

- Low-maintenance polyurethane construction
- High tensile strength
- Abrasion and UV resistant
- Low pre-tension
- Excellent durability vs. moisture
- Various cord and polyurethane grades available

CHEMICAL ATTRIBUTES

- Long-lasting
- High chemical resistance
- High durability vs. detergent
- Excellent durability vs. oil and fat
- Conditionally permanent vs. acids and bases



TOOTH PROFILES

IMPERIAL TOOTH PROFILE

PITCH: XL / L / H / XH
Imperial pitch belt compatible with pulleys according to ISO 5296



ATTRIBUTES	APPLICATIONS
Low tooth profiles with large surface areang	Low to medium load conveying

T TOOTH PROFILE

PITCH: T2.5 / T5 / T10 / T20
T pitch belt compatible with pulleys according to ISO 17396



ATTRIBUTES	APPLICATIONS
Developed to enable higher load carrying capacity combined with lower backlash	Low to medium load conveying

AT TOOTH PROFILE


PITCH: AT5 / AT10 / AT20
AT pitch belt compatible with pulleys according to ISO 17396



ATTRIBUTES	APPLICATIONS:
Stronger cords and higher tooth shear strength for improved performance	- Linear positioning - Power transmission - Medium to high load conveying

HTD TOOTH PROFILE

PITCH: HTD5 / HTD8 / HTD14
HTD pitch belt compatible with pulleys according to ISO 13050



ATTRIBUTES	APPLICATIONS:
- Higher tooth meshing, equal tension distribution and load transmission - Reduced wear and noise characteristics	- Linear / rotary positioning - Power transmission



HPL TOOTH PROFILE

PITCH: HPL3, HPL5 and HPL8



ATTRIBUTES

- High-performance synchronous belt
- Gates GT™ tooth shape


APPLICATIONS:

- Linear positioning
- Lifting

STD TOOTH PROFILE

PITCH: STD5 / STD8

STD pitch belt compatible with pulleys according to ISO 13050



ATTRIBUTES

- Reduced wear and noise characteristics


APPLICATIONS:

- Linear positioning
- Power transmission

GPP TOOTH PROFILE

PITCH: GPP8 / GPP14

GPP pitch belt compatible with pulleys according to ISO 13050



ATTRIBUTES


- Reduced wear and noise characteristics

APPLICATIONS:

- Linear positioning
- Lifting

FLAT BELTS

PITCH: F20 / F30 / F48



ATTRIBUTES

- Easy belt guiding
- Small pulley diameters

APPLICATIONS:

- Lifting
- Pulling

WIDE BELTS

PITCH: WT5 / WT10 / WH / GMT3 / WHTD8M / WSTD8 / CC8



ATTRIBUTES

- Standard width 200mm for WT5 and 450mm or 18" for all other wide belts
- Alternative to plastic modular chains and flat belting

APPLICATIONS:

- Synchronous conveying
- Hygienic Industry
- Tire Industry
- Food industry applications



MATERIALS

POLYURETHANE GRADES

TPU RESIN	BELT TYPES	HARDNESS	TEMP RANGE
TPU RESINS FOR STANDARD APPLICATIONS			
R1	Linear, Flat & Wide Belt	92° Shore A	-5 to +70°C
R2	Linear, Flat & Wide Belt	85° Shore A	-10 to +60°C
R3	Sleeves	84° Shore A	-25 to +75°C
R23	Flex Belt	90° Shore A	-5 to +70°C
TPU RESINS FOR LOW TEMPERATURE APPLICATIONS			
R23T	Linear, Flat & Flex Belt	90° Shore A	-30 to +50°C
TPU RESINS FOR FOOD CONTACT *			
R9	Linear WR series	92° Shore A	-5 to +70°C
R23F	Flex Belt	90° Shore A	-5 to +70°C
FDA	Linear & Wide Belt	85° Shore A	-10 to +60°C

* Please contact our application engineers for available belt constructions that meet USDA or EU food regulations.

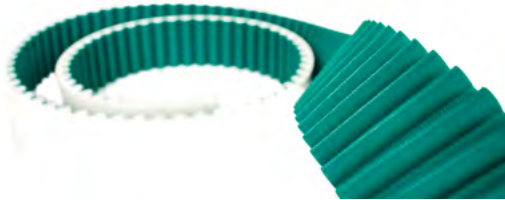
CORD CONSTRUCTIONS

DESIGNATOR	DESCRIPTION
BSL	Basic steel
SL	Steel
HF	High Flexible Steel
RSL	Reinforced Steel
RHF	Reinforced High Flexible Steel
NIRO	Stainless Steel
K	Aramid
RK	Reinforced Aramid

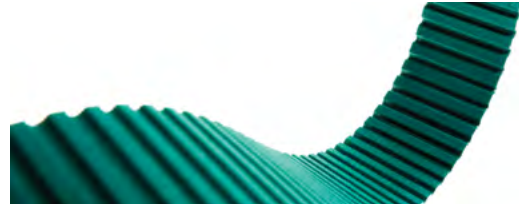
POLYAMID FABRIC OPTIONS

NT	Polyamid fabric on tooth side
NB	Polyamid fabric on back
NTB	Polyamid fabric on tooth and back
AS	Antistatic Polyamid fabric on tooth and back

GATES TPU PRODUCTS

**SYNCHRO-POWER LINEAR**

Open ended or endless welded TPU timing belt for linear movement and conveying.

**SYNCHRO-POWER FLEX**

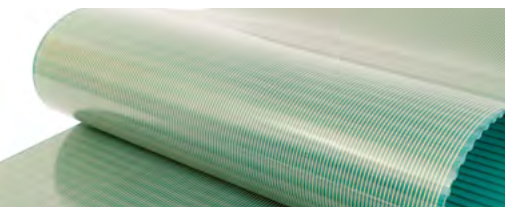
Truly endless TPU timing belt up to 22,9m for power transmission and rotary positioning.

**SYNCHRO-POWER FLAT**

Open ended TPU flat belt for pulling and lifting applications.

**BELTS WITH BACKINGS**

Endless welded TPU timing belt for conveying and transportation.

**SYNCHRO-POWER WIDE**

Endless welded wide TPU timing belt for synchronous conveying.

**BELT WITH PROFILES**

Endless welded TPU timing belt for conveying and transportation.

**SYNCHRO-POWER SLEEVES**

Truly endless timing belt for light power transmission and rotary positioning.

**FABRICATED BELTS**

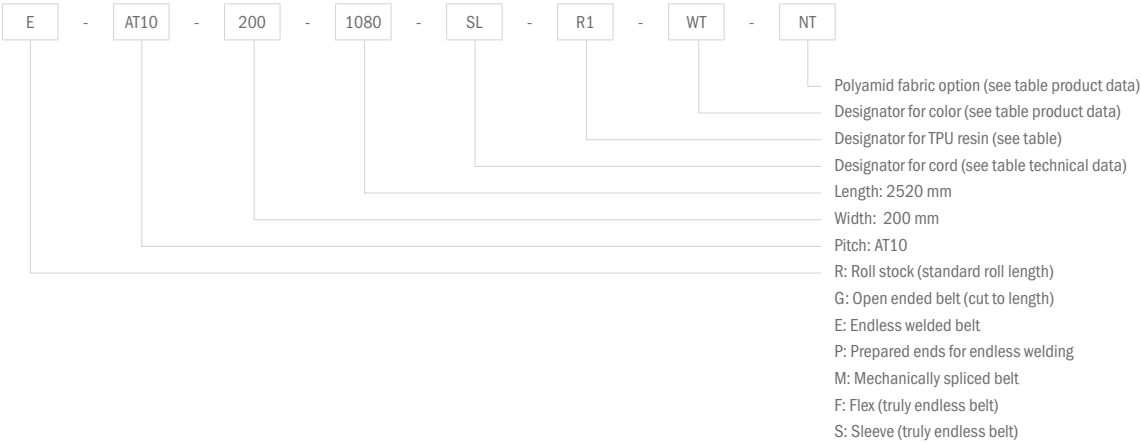
Endless welded TPU timing belt for conveying and transportation.



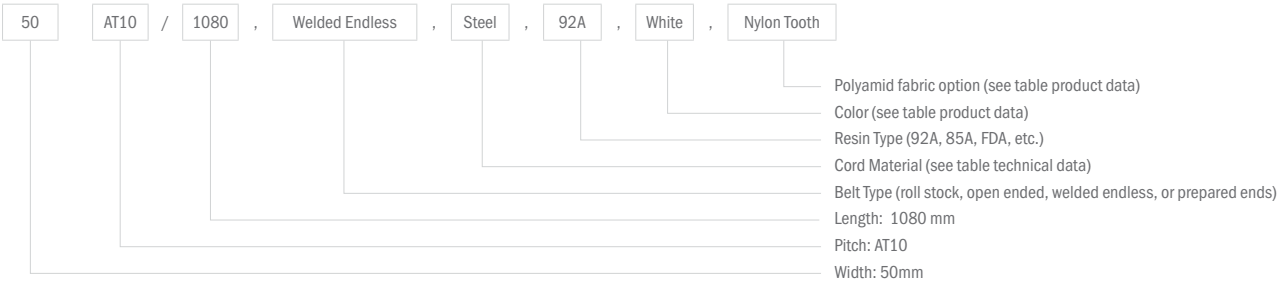
HOW TO ORDER

METRIC PITCHES

METHOD 1 (GATES INTERNAL)



METHOD 2 (INDUSTRY STANDARD)

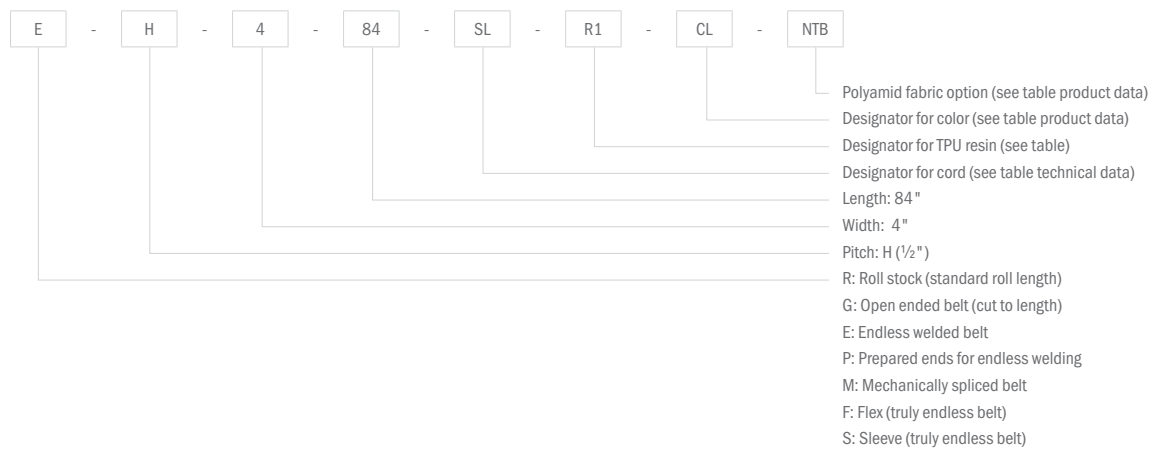


For the adding of backings, profiles, machining, or other custom charactersits, please include a description and drawing of your request and add it to the information above.

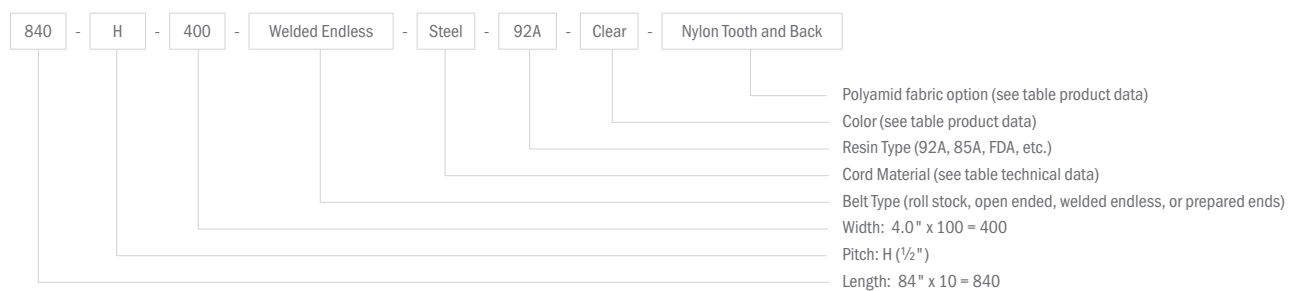
HOW TO ORDER

IMPERIAL PITCHES

METHOD 1 (GATES INTERNAL)



METHOD 2 (INDUSTRY STANDARD)



For the adding of backings, profiles, machining, or other custom charactersits, please include a description and drawing of your request and add it to the information above.



SYNCHRO-POWER LINEAR

TIMING BELTS

Gates TPU linear timing belts are manufactured in standard roll lengths in different pitches, constructions and tooth shapes. The wide range of various designs offers the exact solution for nearly every application. Linear belts are available as roll stock, open ended (long length), pre-punched or endless, thermal welded belts.

For special custom applications, the belts can be coated with various backings and/or manufactured with welded on profiles.

GATES TPU LINEAR BELTS ARE DESIGNED TO ENSURE HIGH GRADE PERFORMANCE FOR BOTH, POWER TRANSMISSION AND LINEAR APPLICATIONS AND CAN BE USED FOR A BROAD RANGE OF DEMANDS, SPEEDS, AND APPLICATIONS.



ATTRIBUTES

- Thermoplastic polyurethane construction
- High tensile strength and stiffness
- Parallel cord construction for uniform tensioning
- Smooth, low-noise operation
- Temperature range:
Standard TPU: R1 - 5° to + 70° C Low temp TPU: R23T - 30° to + 50°C
- Extended service temperature range is available on request
- FDA and EU food approval for various pitches

APPLICATIONS

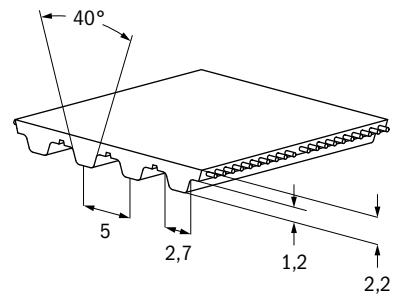
- Conveying- and handling equipment
- Linear applications
- Vertical Lifting
- Synchronous conveying applications
- Automatic assembly machines
- Door drives
- Textile industry

PROCESSING OPTIONS

- Backings - Further information on page 97
- Profiles - Further information on page 103
- Special processing - Further information on page 109

T5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,2 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,5 mm
> 50MM WIDTH	+0,75 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	10	10
	D MIN	16	16
	Z MIN	15	15
	D MIN	30	30

dmin = 50mm for low temperature applications

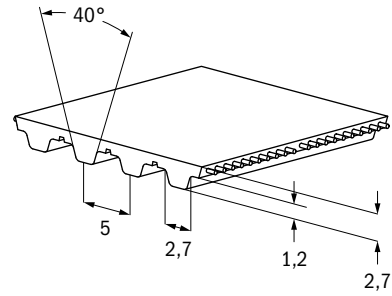
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	1.250	2.000	3.375	4.250	6.875	10.375	13.875
Aramid (K)	[N]	2.670	4.539	7.209	9.345	14.685	22.161	29.637
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	311	498	840	1.058	1.711	2.582	3.453
Aramid (K)	[N]	339	576	916	1.187	1.865	2.814	3.764
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	156	249	420	529	856	1.291	1.727
Aramid (K)	[N]	254	432	687	890	1.399	2.111	2.823
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	250	400	625	800	1.250	1.875	2.500
BELT WEIGHT								
Steel (SL)	[kg/m]	0,02	0,04	0,06	0,07	0,11	0,16	0,22
Aramid (K)	[kg/m]	0,02	0,03	0,05	0,06	0,10	0,15	0,20
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	77.778	124.444	210.000	264.444	427.778	645.556	863.333
Aramid (K)	[N]	84.769	144.106	228.875	296.690	466.227	703.579	940.931

T5-AS / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,7 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,5 mm
> 50MM WIDTH	+,-0,75 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Black
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Antistatic fabric on tooth and back
MEET ANTISTATIC STANDARD	IES DTS 60079-32 TRBS 2153 CENELEC TR50404

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL
Z MIN	10
D MIN	16
Z MIN	15
D MIN	30



d_{min} = 50mm for low temperature applications

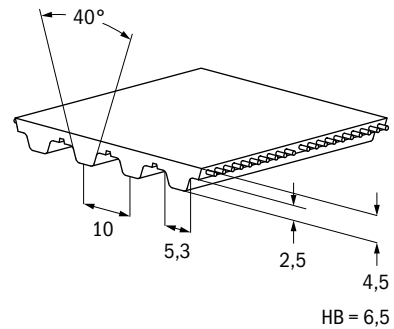
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	1.250	2.000	3.375	4.250	6.875	10.375	13.875
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	311	498	840	1.058	1.711	2.582	3.453
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	156	249	420	529	856	1.291	1.727
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	250	400	625	800	1.250	1.875	2.500
BELT WEIGHT								
Steel (SL)	[kg/m]	0,02	0,04	0,05	0,07	0,11	0,17	0,22
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	77.778	124.444	210.000	264.444	427.778	645.556	863.333

T10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	
T10	4,5 mm
T10HB	6,5 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,5 mm
> 50MM WIDTH	+,-0,75 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	480 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB
ANTISTATIC NYLON	Optional

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID	STEEL HF
	Z MIN	14	14	12
	D MIN	45	45	38
	Z MIN	20	20	15
	D MIN	60	60	50

dmin = 50mm for low temperature applications

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

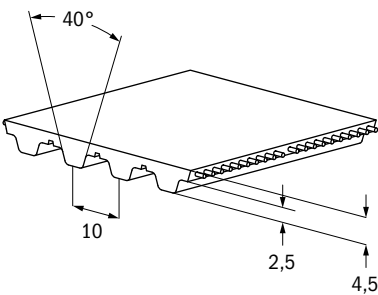
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	12	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	2.940	4.200	7.140	9.240	14.700	22.260	29.820	44.940
Aramid (K)	[N]	3.234	4.851	8.085	10.241	16.709	25.333	33.957	51.205
Steel HF (HF)	[N]	4.340	6.200	10.540	13.640	21.700	32.860	44.020	66.340
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel (SL)	[N]	786	1.123	1.909	2.470	3.929	5.950	7.971	12.012
Aramid (K)	[N]	425	638	1.064	1.347	2.198	3.332	4.467	6.736
Steel HF (HF)	[N]	964	1.376	2.340	3.028	4.818	7.295	9.773	14.728
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Steel (SL)	[N]	393	561	954	1.235	1.965	2.975	3.985	6.006
Aramid (K)	[N]	319	479	798	1.010	1.648	2.499	3.350	5.052
Steel HF (HF)	[N]	482	688	1.170	1.514	2.409	3.648	4.886	7.364
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	683	910	1.423	1.821	2.845	4.268	5.690	8.535
BELT WEIGHT									
Steel (SL)	[kg/m]	0,05	0,07	0,11	0,14	0,22	0,33	0,44	0,66
Aramid (K)	[kg/m]	0,04	0,06	0,09	0,12	0,18	0,27	0,36	0,54
Steel HF (HF)	[kg/m]	0,06	0,08	0,12	0,15	0,24	0,35	0,47	0,71
HB Steel	[kg/m]	0,08	0,11	0,17	0,21	0,34	0,50	0,67	1,01
HB Aramid	[kg/m]	0,07	0,10	0,15	0,19	0,30	0,44	0,59	0,89
HB Steel HF	[kg/m]	0,09	0,12	0,18	0,22	0,36	0,52	0,70	1,06
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	196.463	280.662	477.125	617.456	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	106.350	159.525	265.875	336.775	549.475	833.075	1.116.675	1.683.875
Steel HF (HF)	[N]	240.882	344.118	585.000	757.059	1.204.412	1.823.824	3.443.235	5.183.059

T10AS / PITCH: 10MM

PRODUCT SPECIFICATIONS

PITCH	10 mm
STANDARD THICKNESS	4,5 mm
WIDTH TOLERANCE	+ -1,0 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Black
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Antistatic fabric on tooth and back
MEET ANTISTATIC STANDARD	ISO 9563



MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL
	Z MIN	14
	D MIN	45
	Z MIN	20
	D MIN	60

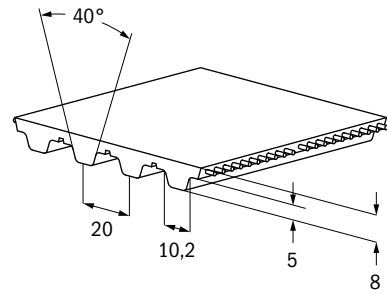

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	4.200	7.140	9.240	14.700	22.260	29.820	44.940
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	1.123	1.909	2.470	3.929	5.950	7.971	12.012
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	561	954	1.235	1.965	2.975	3.985	6.006
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	910	1.423	1.821	2.845	4.268	5.690	8.535
BELT WEIGHT								
Steel (SL)	[kg/m]	0,07	0,11	0,14	0,22	0,33	0,44	0,66
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	280.662	477.125	617.456	982.316	1.487.507	1.992.699	3.003.081

T20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
STANDARD THICKNESS	8,0 mm
WIDTH TOLERANCE	+/-1,0 mm
MINIMUM WELDED BELT LENGTH	1000 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	15	15	12	20
D MIN	95	95	76	127
Z MIN	25	25	22	30
D MIN	120	120	100	160

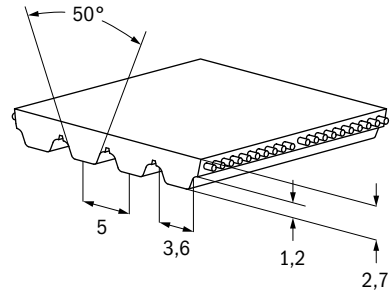
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	17.100	20.900	34.200	51.300	68.400	102.600
Aramid (K)	[N]	16.185	20.501	33.449	50.713	67.977	102.505
Steel HF (HF)	[N]	12.975	16.435	26.815	40.655	54.495	82.175
Stainless Steel (NIRO)	[N]	10.688	13.538	22.088	33.488	44.888	67.688
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	4.209	5.144	8.417	12.626	16.835	25.252
Aramid (K)	[N]	1.675	2.175	3.461	5.247	7.033	10.606
Steel HF (HF)	[N]	3.456	4.378	7.142	10.829	14.515	21.888
Stainless Steel (NIRO)	[N]	2.806	3.554	5.799	8.791	11.784	17.770
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	2.104	2.572	4.209	6.313	8.417	12.626
Aramid (K)	[N]	1.256	1.631	2.596	3.935	5.275	7.954
Steel HF (HF)	[N]	1.728	2.189	3.571	5.414	7.258	10.944
Stainless Steel (NIRO)	[N]	1.403	1.777	2.899	4.396	5.892	8.885
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	3.075	3.936	6.150	9.225	12.300	18.450
BELT WEIGHT							
Steel (SL)	[kg/m]	0,19	0,24	0,38	0,57	0,76	1,15
Aramid (K)	[kg/m]	0,18	0,23	0,36	0,54	0,72	1,08
Steel HF (HF)	[kg/m]	0,15	0,19	0,30	0,44	0,59	0,89
Stainless Steel (NIRO)	[kg/m]	0,19	0,24	0,37	0,56	0,74	1,11
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.052.156	1.285.969	2.104.313	3.156.469	4.208.625	6.312.938
Aramid (K)	[N]	418.650	543.687	865.210	1.311.770	1.758.330	2.651.450
Steel HF (HF)	[N]	864.000	1.094.400	1.785.600	2.707.200	3.628.800	5.472.000
Stainless Steel (NIRO)	[N]	701.438	888.488	1.449.638	2.197.838	2.946.038	4.442.438

AT5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,7 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,5 mm
> 50MM WIDTH	+,-0,75 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	15	15
	D MIN	24	24
	Z MIN	20	20
	D MIN	60	60

d_{min} = 50mm for low temperature applications

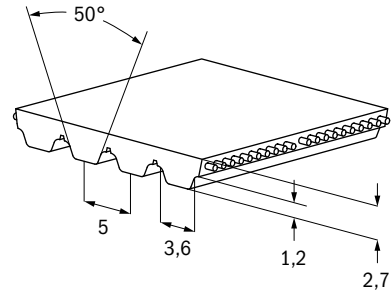
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	2.565	4.275	7.125	9.120	14.535	21.945	29.355
Aramid (K)	[N]	3.006	5.010	8.350	10.688	17.034	25.718	34.402
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	634	1.056	1.761	2.253	3.591	5.422	7.253
Aramid (K)	[N]	455	757	1.210	1.562	2.468	3.727	4.985
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	317	528	880	1.127	1.796	2.711	3.627
Aramid (K)	[N]	341	568	908	1.172	1.851	2.795	3.739
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	480	768	1.200	1.536	2.400	3.600	4.800
BELT WEIGHT								
Steel (SL)	[kg/m]	0,03	0,05	0,08	0,11	0,17	0,25	0,33
Aramid (K)	[kg/m]	0,03	0,04	0,07	0,09	0,14	0,20	0,27
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	158.445	264.075	440.125	563.360	897.855	1.355.585	1.813.315
Aramid (K)	[N]	108.900	181.500	302.500	387.200	617.100	931.700	1.246.300

ATL5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,7 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,5 mm
> 50MM WIDTH	+0,75 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL
Z_{min}		15
d_{min}		24
Z_{min}		20
d_{min}		60

d_{min} = 50mm for low temperature applications

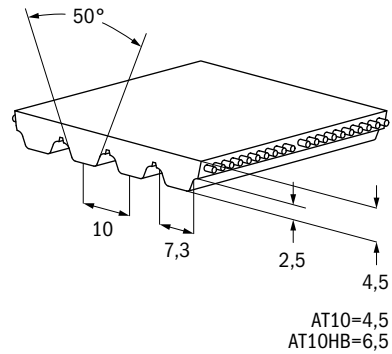

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	3.720	6.200	10.540	13.640	21.700	32.860	44.020	66.340
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel (SL)	[N]	826	1.376	2.340	3.028	4.818	7.295	9.773	14.728
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Steel (SL)	[N]	413	688	1.170	1.514	2.409	3.648	4.886	7.364
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	480	768	1.200	1.536	2.400	3.600	4.800	7.200
BELT WEIGHT									
Steel (SL)	[kg/m]	0,03	0,05	0,07	0,09	0,14	0,21	0,28	0,42
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	206.471	344.118	585.000	757.059	1.204.412	1.823.824	2.443.235	3.682.059

AT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	
AT10	4,5 mm
AT10 HB	6,5 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,75 mm
> 50MM WIDTH	+1,00 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	480 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	25	25	12	25
D MIN	48	48	38	80
Z MIN	25	25	20	40
D MIN	120	120	100	150

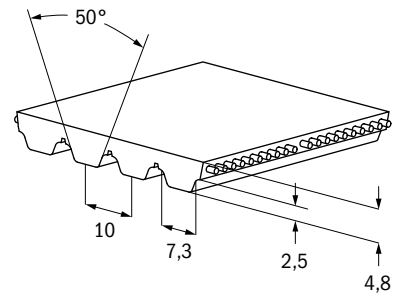

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	10.450	17.100	20.900	34.200	51.300	68.400	102.600
Aramid (K)	[N]	9.711	16.185	20.501	33.449	50.713	67.977	102.505
Steel HF (HF)	[N]	7.785	12.975	16.435	26.815	40.655	54.495	82.175
Stainless Steel (NIRO)	[N]	6.413	10.688	13.538	22.088	33.488	44.888	67.688
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	2.572	4.209	5.144	8.417	12.626	16.835	25.252
Aramid (K)	[N]	1.005	1.675	2.121	3.461	5.247	7.033	10.606
Steel HF (HF)	[N]	1.944	3.240	4.104	6.696	10.152	13.608	20.520
Stainless Steel (NIRO)	[N]	1.683	2.806	3.554	5.799	8.791	11.784	17.770
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	1.286	2.104	2.572	4.209	6.313	8.417	12.626
Aramid (K)	[N]	754	1.256	1.591	2.596	3.935	5.275	7.954
Steel HF (HF)	[N]	972	1.620	2.052	3.348	5.076	6.804	10.260
Stainless Steel (NIRO)	[N]	842	1.403	1.777	2.899	4.396	5.892	8.885
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	1.651	2.580	3.302	5.160	7.740	10.320	15.480
BELT WEIGHT								
Steel (SL)	[kg/m]	0,09	0,15	0,19	0,29	0,44	0,59	0,89
Aramid (K)	[kg/m]	0,07	0,11	0,13	0,21	0,32	0,42	0,63
Steel HF (HF)	[kg/m]	0,09	0,14	0,18	0,27	0,41	0,55	0,82
Stainless Steel (NIRO)	[kg/m]	0,11	0,17	0,21	0,34	0,50	0,67	1,01
HB Steel	[kg/m]	0,13	0,20	0,26	0,40	0,60	0,80	1,21
HB Aramid	[kg/m]	0,10	0,16	0,21	0,33	0,49	0,65	0,98
HB Steel HF	[kg/m]	0,12	0,20	0,25	0,39	0,59	0,78	1,17
HB Stainless Steel	[kg/m]	0,14	0,23	0,29	0,45	0,68	0,90	1,35
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	642.984	1.052.156	1.285.969	2.104.313	3.156.469	4.208.625	6.312.938
Aramid (K)	[N]	251.190	418.650	530.290	865.210	1.311.770	1.758.330	2.651.450
Steel HF (HF)	[N]	486.000	810.000	1.026.000	1.674.000	2.538.000	3.402.000	5.130.000
Stainless Steel (NIRO)	[N]	420.863	701.438	888.488	1.449.638	2.197.838	2.946.038	4.442.438

ATL10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	4,8 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -1,00 mm
> 50MM WIDTH	+ -1,50 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STEEL RHF
Z MIN	25	25	20	40
D MIN	80	80	64	127
Z MIN	30	30	25	42
D MIN	150	150	130	200

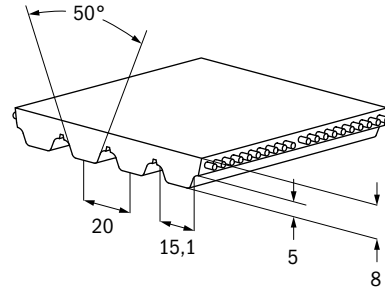
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	13.840	24.220	31.140	50.170	76.120	102.070	153.970
Aramid (K)	[N]	13.390	21.798	28.337	45.153	68.508	91.863	138.573
Steel HF (HF)	[N]	15.400	26.950	34.650	55.825	84.700	113.575	171.325
Steel RHF	[N]	N/A	41.250	52.250	82.500	123.750	165.000	247.500
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	3.349	5.860	7.534	12.139	18.147	24.696	37.253
Aramid (K)	[N]	1.222	1.989	2.585	4.120	6.251	8.382	12.643
Steel HF (HF)	[N]	2.902	5.079	6.530	10.521	15.963	21.404	32.288
Steel RHF	[N]	N/A	9.600	12.160	19.200	28.800	38.400	57.600
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	1.651	2.580	3.302	5.160	7.740	10.320	15.480
BELT WEIGHT								
Steel (SL)	[kg/m]	0,11	0,17	0,21	0,34	0,50	0,67	1,01
Aramid (K)	[kg/m]	0,07	0,10	0,13	0,21	0,31	0,41	0,62
Steel HF (HF)	[kg/m]	0,12	0,18	0,23	0,36	0,54	0,72	1,08
Steel RHF	[N]	N/A	0,21	0,27	0,42	0,63	0,85	1,27
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	837.143	1.465.000	1.883.571	3.034.643	4.604.286	6.173.929	9.313.214
Aramid (K)	[N]	305.429	497.210	646.373	1.029.935	1.562.660	2.095.385	3.160.836
Steel HF (HF)	[N]	725.571	1.269.750	1.632.536	2.630.196	3.990.643	5.351.089	8.071.982
Steel RHF	[N]	N/A	2.400.000	3.040.000	4.800.000	7.200.000	9.600.000	14.400.000

AT20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
STANDARD THICKNESS	8,0 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-1,00 mm
> 50MM WIDTH	+/-1,50 mm
MINIMUM WELDED BELT LENGTH	1.200 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	18	18
	D MIN	115	115
	Z MIN	25	25
	D MIN	180	180

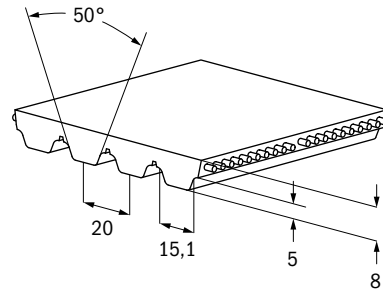

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	24.220	31.140	50.170	76.120	102.070	153.970
Aramid (K)	[N]	21.798	28.337	45.153	68.508	91.863	138.573
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	5.860	7.534	12.139	18.417	24.696	37.253
Aramid (K)	[N]	1.989	2.585	4.120	6.251	8.382	12.643
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	2.930	3.767	6.069	9.209	12.348	18.626
Aramid (K)	[N]	1.492	1.939	3.090	4.688	6.286	9.483
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	5.450	6.976	10.900	16.350	21.800	32.700
BELT WEIGHT							
Steel (SL)	[kg/m]	0,24	0,31	0,48	0,73	0,97	1,45
Aramid (K)	[kg/m]	0,18	0,23	0,37	0,55	0,73	1,10
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.465.000	1.883.571	3.034.643	4.604.286	6.173.929	9.313.214
Aramid (K)	[N]	497.210	646.373	1.029.935	1.562.660	2.095.385	3.160.836

ATL20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
STANDARD THICKNESS	8,0 mm
WIDTH TOLERANCE	+/-2,00 mm
MINIMUM WELDED BELT LENGTH	NA
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL
Z MIN	25
D MIN	159
Z MIN	30
D MIN	250

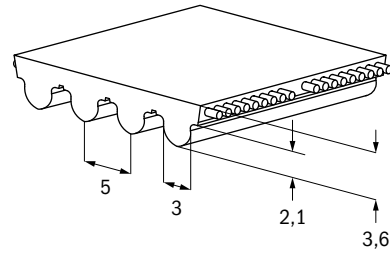
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	41.600	70.400	105.600	144.000	217.600
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel (SL)	[N]	9.106	15.410	23.115	31.520	47.631
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	6.976	10.900	16.350	21.800	32.700
BELT WEIGHT						
Steel (SL)	[kg/m]	0,35	0,54	0,81	1,08	1,63
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	2.276.477	3.852.500	5.778.749	7.880.113	11.907.726

HTD5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	3,6 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,5 mm
> 50MM WIDTH	+,-0,75 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	480 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	STEEL BASIC	ARAMID
Z_{min}		Z MIN 14	16	16
d_{min}		D MIN 22	25	25
Z_{min}		Z MIN 18	20	20
d_{min}		D MIN 60	80	80

d_{min} = 50mm for low temperature applications

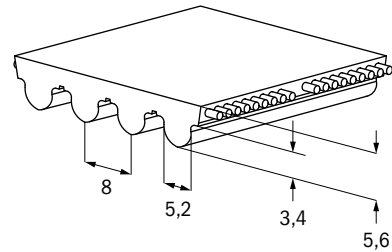

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	15	20	25	30	50	100	150
BREAKING FORCE / AVERAGE VALUE									
Steel basic (BSL)	[N]	2.520	3.780	5.460	7.140	8.400	14.700	29.820	44.940
Steel (SL)	[N]	3.720	5.580	8.060	10.540	12.400	21.700	44.020	66.340
Aramid (K)	[N]	2.695	4.312	5.929	8.085	9.702	16.709	33.957	51.205
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel basic (BSL)	[N]	674	1.010	1.459	1.909	2.245	3.929	7.971	12.012
Steel (SL)	[N]	826	1.239	1.789	2.340	2.753	4.818	9.773	14.728
Aramid (K)	[N]	355	567	780	1.064	1.276	2.198	4.467	6.736
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Steel basic (BSL)	[N]	337	505	730	954	1.123	1.965	3.985	6.006
Steel (SL)	[N]	413	619	895	1.170	1.376	2.409	4.886	7.364
Aramid (K)	[N]	266	425	585	798	957	1.648	3.350	5.052
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	450	675	900	1.125	1.350	2.250	4.500	6.750
BELT WEIGHT									
Steel basic (BSL)	[kg/m]	0,04	0,07	0,09	0,11	0,13	0,22	0,44	0,66
Steel (SL)	[kg/m]	0,05	0,07	0,10	0,12	0,15	0,25	0,49	0,74
Aramid (K)	[kg/m]	0,03	0,04	0,06	0,07	0,09	0,15	0,29	0,44
SPECIFIC BELT STIFFNESS									
Steel basic (BSL)	[N]	168.397	252.596	364.860	477.125	561.324	982.316	1.992.699	3.003.081
Steel (SL)	[N]	206.471	309.706	447.353	585.000	688.235	1.204.412	2.443.235	3.682.059
Aramid (K)	[N]	88.625	141.800	194.975	265.875	319.050	549.475	1.116.675	1.683.875

HTD8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,6 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,75 mm
> 50MM WIDTH	+1,00 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	552 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	18	18	16	25
D MIN	46	46	41	64
Z MIN	20	20	18	30
D MIN	120	120	100	150

dmin = 50mm for low temperature applications

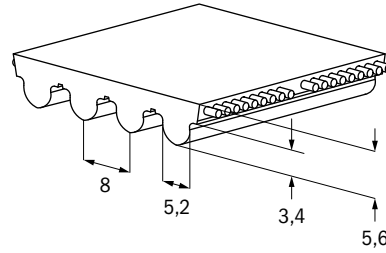
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	15	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE										
Steel (SL)	[N]	5.700	9.500	12.350	17.100	19.000	34.200	57.000	58.400	102.600
Aramid (K)	[N]	5.395	8.632	11.869	16.185	19.422	33.449	57.187	67.977	102.505
Steel HF (HF)	[N]	4.325	6.920	9.515	12.975	15.570	26.815	45.845	54.495	82.175
Stainless Steel (NIRO)	[N]	3.563	5.700	7.838	10.688	12.825	22.088	37.763	44.888	67.688
ALLOWABLE BELT FORCE / OPEN ENDED										
Steel (SL)	[N]	1.403	2.338	3.040	3.741	4.676	8.417	14.029	16.835	25.252
Aramid (K)	[N]	558	893	1.228	1.675	2.010	3.461	5.917	7.033	10.606
Steel HF (HF)	[N]	1.152	1.843	2.534	3.456	4.147	7.142	12.211	14.515	21.888
Stainless Steel (NIRO)	[N]	935	1.496	2.058	2.806	3.367	5.799	9.914	11.784	17.770
ALLOWABLE BELT FORCE / ENDLESS WELDED										
Steel (SL)	[N]	701	1.169	1.520	2.104	2.338	4.209	7.014	8.417	12.626
Aramid (K)	[N]	419	670	921	1.256	1.507	2.596	4.438	5.275	7.954
Steel HF (HF)	[N]	576	922	1.267	1.728	2.074	3.571	6.106	7.258	10.944
Stainless Steel (NIRO)	[N]	468	748	1.029	1.403	1.683	2.899	4.957	5.892	8.885
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH										
	[N]	930	1.395	1.860	2.325	2.790	4.650	7.905	9.300	13.950
BELT WEIGHT										
Steel (SL)	[kg/m]	0,07	0,11	0,14	0,18	0,21	0,35	0,60	0,70	1,06
Aramid (K)	[kg/m]	0,05	0,07	0,09	0,12	0,14	0,24	0,40	0,47	0,71
Steel HF (HF)	[kg/m]	0,07	0,10	0,13	0,17	0,20	0,33	0,56	0,66	0,99
Stainless Steel (NIRO)	[kg/m]	0,07	0,10	0,14	0,17	0,20	0,34	0,58	0,68	1,02
SPECIFIC BELT STIFFNESS										
Steel (SL)	[N]	350.719	584.531	759.891	935.250	1.169.063	2.104.313	3.507.188	4.208.625	6.312.938
Aramid (K)	[N]	139.550	223.280	307.010	418.650	502.380	865.210	1.479.230	1.758.330	2.651.450
Steel HF (HF)	[N]	288.000	460.800	633.600	864.000	1.036.800	1.785.600	3.052.800	3.628.800	5.472.000
Stainless Steel (NIRO)	[N]	233.813	374.100	514.388	701.438	841.725	1.449.638	2.478.413	2.946.038	4.442.438

HTDL8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,6 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-1,00 mm
> 50MM WIDTH	+,-1,50 mm
MINIMUM WELDED BELT LENGTH	NA
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID	STEEL HF
	Z MIN	31	31	25
	D MIN	80	80	64
	Z MIN	38	38	32
	D MIN	150	150	130

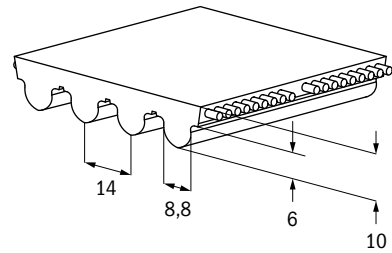

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	19.030	24.220	29.410	50.170	86.500	102.070	153.970
Aramid (K)	[N]	17.127	21.798	26.469	45.153	77.850	91.863	138.573
Steel HF (HF)	[N]	21.175	26.950	32.725	55.825	96.250	113.575	171.325
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	4.604	5.860	7.116	12.139	20.929	24.696	37.253
Aramid (K)	[N]	1.563	1.989	2.415	4.120	7.103	8.382	12.643
Steel HF (HF)	[N]	3.991	5.079	6.167	10.521	18.139	21.404	32.288
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	1.860	2.325	2.790	4.650	7.905	9.300	13.950
BELT WEIGHT								
Steel (SL)	[kg/m]	0,16	0,20	0,24	0,39	0,67	0,79	1,18
Aramid (K)	[kg/m]	0,09	0,11	0,14	0,23	0,38	0,45	0,68
Steel HF (HF)	[kg/m]	0,17	0,21	0,25	0,42	0,71	0,83	1,25
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	1.151.071	1.465.000	1.778.929	3.034.643	5.232.143	6.173.929	9.313.214
Aramid (K)	[N]	390.665	497.210	603.755	1.029.935	1.775.750	2.095.385	3.160.836
Steel HF (HF)	[N]	997.661	1.269.750	1.541.839	2.630.196	4.534.821	5.351.089	8.071.982

HTD14 / PITCH: 14MM**PRODUCT SPECIFICATIONS**

PITCH	14 mm
STANDARD THICKNESS	10 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-1,00 mm
50 TO 100MM WIDTH	+,-1,50 mm
> 100 MM WIDTH	+,-2,00 mm
MINIMUM WELDED BELT LENGTH	1.200 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF
Z MIN	28	28	23
D MIN	125	125	103
Z MIN	36	36	32
D MIN	180	180	160

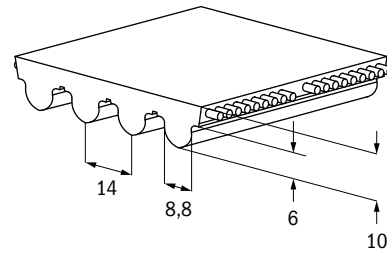
POLYURETHANE	HARDNESS [*SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	25	40	55	85	115	170
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	24.220	39.790	55.360	86.500	117.640	174.730
Aramid (K)	[N]	18.684	31.140	43.596	66.951	91.863	137.016
Steel HF (HF)	[N]	26.950	44.275	61.600	96.250	130.900	194.425
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	5.860	9.627	13.394	20.929	28.463	42.276
Aramid (K)	[N]	1.705	2.841	3.978	6.109	8.382	12.501
Steel HF (HF)	[N]	5.079	8.344	11.609	18.139	24.669	36.641
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	2.930	4.814	6.697	10.464	14.231	21.138
Aramid (K)	[N]	1.279	2.131	2.983	4.581	6.286	9.376
Steel HF (HF)	[N]	2.540	4.172	5.805	9.070	12.335	18.321
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	4.313	6.900	9.488	14.663	19.838	29.325
BELT WEIGHT							
Steel (SL)	[kg/m]	0,27	0,43	0,60	0,92	1,24	1,84
Aramid (K)	[kg/m]	0,21	0,34	0,46	0,71	0,97	1,43
Steel HF (HF)	[kg/m]	0,28	0,45	0,62	0,96	1,29	1,91
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.465.000	2.406.786	3.348.571	5.232.143	7.115.714	10.568.929
Aramid (K)	[N]	426.180	710.300	994.420	1.527.145	2.095.385	3.125.320
Steel HF (HF)	[N]	1.269.750	2.086.018	2.902.286	4.534.821	6.167.357	9.160.339

HTDL14 / PITCH: 14MM**PRODUCT SPECIFICATIONS**

PITCH	14 mm
STANDARD THICKNESS	10 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-1,00 mm
50 TO 100MM WIDTH	+/-1,50 mm
> 100 MM WIDTH	+/-2,00 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL
Z MIN	36
D MIN	160
Z MIN	43
D MIN	250



POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature

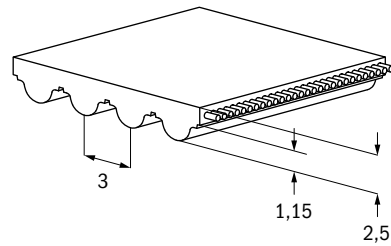
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	55	85	115	170
BREAKING FORCE / AVERAGE VALUE					
Steel (SL)	[N]	76.800	121.600	163.200	246.400
ALLOWABLE BELT FORCE / OPEN ENDED					
Steel (SL)	[N]	16.811	26.617	35.723	53.935
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH					
	[N]	9.488	14.663	19.838	29.325
BELT WEIGHT					
Steel (SL)	[kg/m]	0,68	1,04	1,41	2,09
SPECIFIC BELT STIFFNESS					
Steel (SL)	[N]	4.202.727	6.654.318	8.930.795	13.483.750

HPL3 / PITCH: 3MM

PRODUCT SPECIFICATIONS


PITCH	3 mm
STANDARD THICKNESS	2,5 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,5 mm
> 50MM WIDTH	+0,75 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE $\pm 1\%$)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB



PULLEY DEFINITION

HPL3 BELT RUNS IN GATES 3MGT PULLEY PROFILE
MIN PULLEY TOOTH COUNT AND DIAMETER

	STEEL
Z MIN	25
D MIN	24
Z MIN	27
D MIN	60



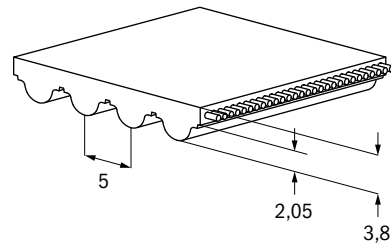
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	4.275	7.125	9.120	14.535	21.945	29.355
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	1.056	1.761	2.253	3.591	6.335	7.253
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	448	700	896	1.400	2.100	2.800
BELT WEIGHT							
Steel (SL)	[kg/m]	0,05	0,07	0,09	0,15	0,22	0,29
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	264.075	440.125	563.360	897.855	1.583.690	1.813.315

HPL5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	3,8 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,5 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**PULLEY DEFINITION**

HPL5 BELT RUNS IN GATES 5MGT PULLEY PROFILE
MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL
Z_{min}		24
d_{min}		39
Z_{min}		28
d_{min}		100

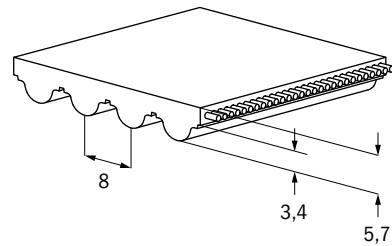
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	30	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	12.975	15.570	26.815	40.655	54.495	82.175
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	3.456	4.147	7.142	10.829	14.515	21.888
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	1.138	1.365	2.275	3.413	4.550	6.825
BELT WEIGHT							
Steel (SL)	[kg/m]	0,12	0,14	0,23	0,35	0,46	0,69
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	864.000	1.036.800	1.785.600	2.707.200	3.628.800	5.472.000

HPL8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**


PITCH	8 mm
STANDARD THICKNESS	5,7 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -1,0 mm
> 50MM WIDTH	+ -1,5 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**PULLEY DEFINITION**

HPL8 BELT RUNS IN GATES HTD8 AND 8MR PULLEY PROFILE

MIN PULLEY TOOTH COUNT AND DIAMETER

	STEEL	STEEL HF
Z MIN	32	25
D MIN	81	64
Z MIN	34	30
D MIN	150	130



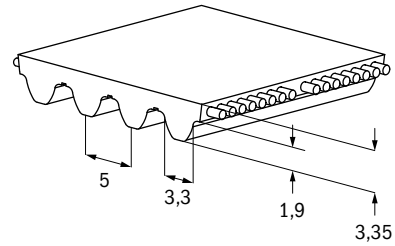

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	19.030	24.220	29.410	50.170	86.500	102.070	153.970
Steel HF (HF)	[N]	21.175	26.950	32.725	55.825	96.250	113.575	171.325
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	4.604	5.860	7.116	12.139	20.929	24.696	37.253
Steel HF (HF)	[N]	3.991	5.079	6.167	10.521	18.139	21.404	32.288
ALLOWABLE EFFECTIVE FORCE / MINIMUM 15 TEETH IN MESH								
	[N]	1.900	2.375	2.850	4.750	8.075	9.500	14.250
BELT WEIGHT								
Steel (SL)	[kg/m]	0,16	0,20	0,24	0,39	0,67	0,79	1,18
Steel HF (HF)	[kg/m]	0,17	0,21	0,25	0,42	0,71	0,83	1,25
Specific Belt Stiffness								
Steel (SL)	[N]	1.151.071	1.465.000	1.778.929	3.034.643	5.232.143	6.173.929	9.313.214
Steel HF (HF)	[N]	997.661	1.269.750	1.541.839	2.630.196	4.534.821	5.351.089	8.071.982

STD5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	3,35 mm
WIDTH TOLERANCE	+/-0,5 mm
MINIMUM WELDED BELT LENGTH	480 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID
Z MIN	14	16
D MIN	22	25
Z MIN	18	20
D MIN	60	80

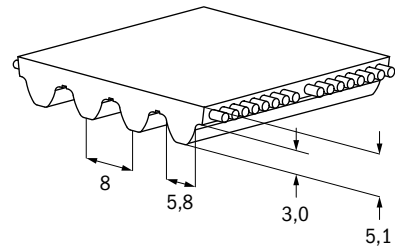

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	15	20	25	30	50
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	3.720	5.580	8.060	10.540	12.400	21.700
Aramid (K)	[N]	2.695	4.312	5.929	8.085	9.702	16.709
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	826	1.239	1.789	2.340	2.753	4.818
Aramid (K)	[N]	355	567	780	1.064	1.276	2.198
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	413	619	895	1.170	1.376	2.409
Aramid (K)	[N]	266	425	585	798	957	1.648
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	410	615	820	1.025	1.230	2.050
BELT WEIGHT							
Steel (SL)	[kg/m]	0,04	0,06	0,08	0,09	0,11	0,19
Aramid (K)	[kg/m]	0,03	0,04	0,06	0,07	0,09	0,15
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	206.471	309.706	447.353	585.000	688.235	1.204.412
Aramid (K)	[N]	88.625	141.800	194.975	265.875	319.050	549.475

STD8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,1 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,75 mm
> 50MM WIDTH	+ -1,00 mm
MINIMUM WELDED BELT LENGTH	
< 100 MM WIDTH	552 mm
> 100 MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	18	18	16	25
D MIN	46	46	41	64
Z MIN	20	20	18	30
D MIN	120	120	100	150

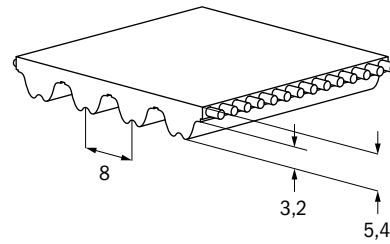
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
R23T	90	-30 to +50	Low Temperature
FDA	85	-10 to +60	With Aramid cord only

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	10	15	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE										
Steel (SL)	[N]	5.700	9.500	12.350	17.100	19.000	34.200	57.000	68.400	102.600
Aramid (K)	[N]	5.395	8.632	11.869	16.185	19.422	33.449	57.187	67.977	102.505
Steel HF (HF)	[N]	4.325	6.910	9.515	12.975	15.570	26.815	45.845	54.495	82.175
Stainless Steel (NIRO)	[N]	3.563	5.700	7.838	10.688	12.825	22.088	37.763	44.888	67.688
ALLOWABLE BELT FORCE / OPEN ENDED										
Steel (SL)	[N]	1.403	2.338	3.040	3.741	4.676	8.417	14.029	16.835	25.252
Aramid (K)	[N]	630	1.003	1.377	1.750	2.123	3.617	6.230	7.350	11.083
Steel HF (HF)	[N]	1.152	1.536	2.112	2.880	3.456	5.952	10.176	12.096	18.240
Stainless Steel (NIRO)	[N]	935	1.496	2.058	2.806	3.367	5.799	9.914	11.784	17.770
ALLOWABLE BELT FORCE / ENDLESS WELDED										
Steel (SL)	[N]	701	1.169	1.520	2.104	2.338	4.209	7.014	8.417	12.626
Aramid (K)	[N]	473	753	1.033	1.313	1.593	2.713	4.673	5.513	8.313
Steel HF (HF)	[N]	576	768	1.056	1.440	1.728	2.976	5.088	6.048	9.120
Stainless Steel (NIRO)	[N]	468	748	1.029	1.403	1.683	2.899	4.957	5.892	8.885
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH										
	[N]	880	1.320	1.760	2.200	2.640	4.400	7.480	8.800	13.200
BELT WEIGHT										
Steel (SL)	[kg/m]	0,07	0,10	0,14	0,17	0,21	0,34	0,58	0,69	1,03
Aramid (K)	[kg/m]	0,05	0,07	0,09	0,12	0,14	0,24	0,40	0,47	0,71
Steel HF (HF)	[kg/m]	0,07	0,10	0,13	0,17	0,20	0,33	0,56	0,66	0,99
Stainless Steel (NIRO)	[kg/m]	0,07	0,10	0,14	0,17	0,20	0,34	0,58	0,68	1,02
SPECIFIC BELT STIFFNESS										
Steel (SL)	[N]	350.719	584.531	759.891	1.052.156	1.169.063	2.104.313	3.507.188	4.208.625	6.312.938
Aramid (K)	[N]	157.500	250.833	344.167	437.500	530.833	904.167	1.557.500	1.837.500	2.770.833
Steel HF (HF)	[N]	288.000	384.000	528.000	720.000	864.000	1.488.000	2.544.000	3.024.000	4.560.000
Stainless Steel (NIRO)	[N]	233.813	374.100	514.388	701.438	841.725	1.449.638	2.478.413	2.946.038	4.442.438

GPP8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,4 mm
WIDTH TOLERANCE	+ - 0,50 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Standard: NT Optional: NTB

**PULLEY DEFINITION**

GPP8 BELT RUNS IN RPP8 AND HTD8M PULLEY PROFILE
MIN PULLEY TOOTH COUNT AND DIAMETER



	STEEL	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	18	16	25
D MIN	46	41	64
Z MIN	20	18	30
D MIN	120	100	150

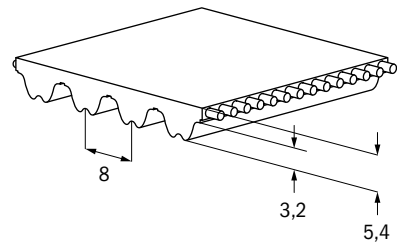
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	15	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE										
Steel	[N]	5.700	8.550	12.350	15.200	19.000	32.300	56.050	66.500	98.800
Steel HF (HF)	[N]	5.190	7.785	11.245	13.840	17.300	29.410	51.035	60.550	89.960
Stainless Steel (NIRO)	[N]	4.275	6.413	9.263	11.400	14.250	24.225	42.038	49.875	74.100
ALLOWABLE BELT FORCE / OPEN ENDED										
Steel	[N]	1.403	2.104	3.040	3.741	4.676	7.950	13.795	16.367	24.317
Steel HF (HF)	[N]	1.296	1.944	2.808	3.456	4.320	7.344	12.744	15.120	22.464
Stainless Steel (NIRO)	[N]	1.052	1.578	2.280	2.806	3.507	5.962	10.346	12.275	18.237
ALLOWABLE BELT FORCE / ENDLESS WELDED										
Steel	[N]	701	1.052	1.520	1.871	2.338	3.975	6.897	8.183	12.158
Steel HF (HF)	[N]	648	972	1.404	1.728	2.160	3.672	6.372	7.560	11.232
Stainless Steel (NIRO)	[N]	526	798	1.140	1.403	1.754	2.981	5.173	6.138	9.119
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH										
	[N]	920	1.380	1.840	2.300	2.760	4.600	7.820	9.200	13.800
BELT WEIGHT										
Steel	[kg/m]	0,05	0,08	0,10	0,13	0,15	0,25	0,42	0,50	0,75
Steel HF (HF)	[kg/m]	0,05	0,07	0,09	0,12	0,14	0,23	0,39	0,47	0,70
Stainless Steel (NIRO)	[kg/m]	0,05	0,07	0,10	0,12	0,15	0,25	0,42	0,50	0,74
SPECIFIC BELT STIFFNESS										
Steel	[N]	350.719	526.078	759.891	935.250	1.169.063	1.987.406	3.448.734	4.091.719	6.079.125
Steel HF (HF)	[N]	324.000	486.000	702.000	864.000	1.080.000	1.836.000	3.186.000	3.780.000	5.616.000
Stainless Steel (NIRO)	[N]	263.039	394.559	569.918	701.438	876.797	1.490.555	2.586.551	3.068.789	4.559.344

GPP8-RSL / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,4 mm
WIDTH TOLERANCE	+ - 0,50 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Standard: NT Optional: NTB

**PULLEY DEFINITION**

GPP8 BELT RUNS IN RPP8 AND HTD8M PULLEY PROFILE
FOR HEAVY LIFTING AND HIGH DYNAMIC APPLICATION
PLEASE CONTACT OUR APPLICATION ENGINEERS
MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL	STEEL HF
Z_{min}		31	25
d_{min}		80	64
Z_{min}		38	32
d_{min}		150	130

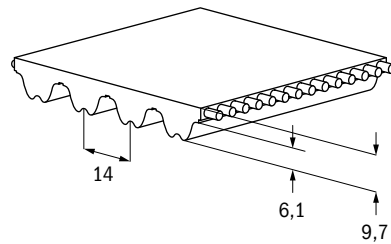
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	15	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	13.840	19.030	25.950	31.140	51.900	91.690	103.800	155.700
Steel HF (HF)	[N]	15.400	21.175	28.875	34.650	57.750	102.025	115.500	173.250
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel (SL)	[N]	3.349	4.604	6.279	7.534	12.557	22.184	25.114	37.671
Steel HF (HF)	[N]	2.902	3.991	5.442	6.530	10.884	19.228	21.767	32.651
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	1.380	1.840	2.300	2.760	4.600	7.820	9.200	13.800
BELT WEIGHT									
Steel (SL)	[kg/m]	0,11	0,15	0,18	0,22	0,37	0,63	0,72	1,09
Steel HF (HF)	[kg/m]	0,11	0,15	0,18	0,22	0,37	0,63	0,72	1,09
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	837.143	1.151.071	1.569.643	1.883.571	3.139.286	5.546.071	6.278.571	9.417.857
Steel HF (HF)	[N]	725.571	997.661	1.360.446	1.632.536	2.720.893	4.806.911	5.441.786	8.162.679

GPP14 / PITCH: 14MM**PRODUCT SPECIFICATIONS**

PITCH	14 mm
STANDARD THICKNESS	9,7 mm
WIDTH TOLERANCE	+/-1,00 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Standard: NT Optional: NTB

**PULLEY DEFINITION**

GPP14 BELT RUNS IN RPP14 AND HTD14M PULLEY PROFILES
FOR HEAVY LIFTING AND HIGH DYNAMIC APPLICATION
PLEASE CONTACT OUR APPLICATION ENGINEERS
MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL
	Z MIN	34
	D MIN	152
	Z MIN	34
	D MIN	200

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R23T	90	-30 to +50	Low Temperature

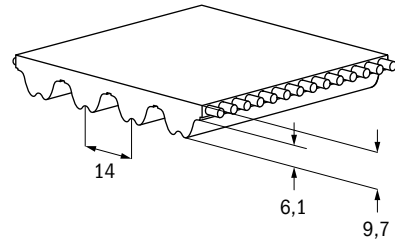
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	40	55	85	115	150	170
BREAKING FORCE / AVERAGE VALUE							
Steel	[N]	64.600	87.400	136.800	186.200	247.000	273.600
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel	[N]	17.850	24.150	37.800	51.450	68.250	75.600
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	6.900	9.488	14.663	19.838	25.875	29.325
BELT WEIGHT							
Steel	[kg/m]	0,50	0,69	1,07	1,44	1,88	2,13
SPECIFIC BELT STIFFNESS							
Steel	[N]	4.462.500	6.037.500	9.450.000	12.862.500	17.062.500	18.900.000

GPP14-RSL / PITCH: 14MM

PRODUCT SPECIFICATIONS

PITCH	14 mm
STANDARD THICKNESS	9,7 mm
WIDTH TOLERANCE	+/- 1,00 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Standard: NT Optional: NTB



PULLEY DEFINITION

GPP14-RSL BELT REQUIRES A SPECIAL PULLEY PROFILE

PLEASE CONTACT OUR APPLICATION ENGINEERS

MIN PULLEY TOOTH COUNT AND DIAMETER

	STEEL
Z _{min} d _{min}	Z MIN 34 D MIN 152
Z _{min} d _{min}	Z MIN 34 D MIN 250

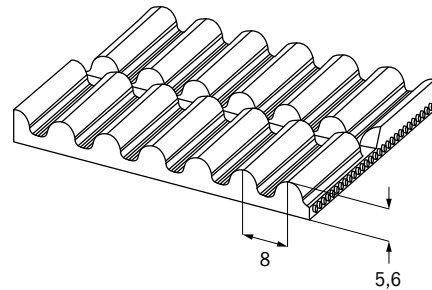


POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

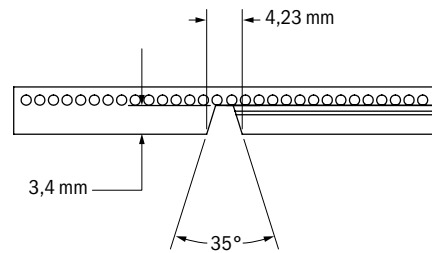
STANDARD WIDTH (MM)	UNIT	40	55	85	115	150	200
BREAKING FORCE / AVERAGE VALUE							
Steel (RSL)	[N]	82.500	112.500	180.000	247.500	322.500	427.500
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (RSL)	[N]	19.621	26.756	42.810	58.864	76.701	101.674
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	6.900	9.488	14.663	19.838	25.875	34.500
BELT WEIGHT							
Steel (RSL)	[kg/m]	0,56	0,76	1,18	1,60	2,08	2,78
SPECIFIC BELT STIFFNESS							
Steel (RSL)	[N]	4.905.312	6.689.062	10.702.499	14.715.936	19.175.311	25.418.435

SST8-RSL / PITCH: 8MM**GATES SILENT SELF TRACKING LINEAR BELT****PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,6 mm
WIDTH TOLERANCE	+/-0,5 mm
STANDARD ROLL LENGTH (TOLERANCE +/-1%)	100 m
STANDARD COLOR	White
FDA/ EU APPROVAL	No
POLYAMIDE FABRIC	Standard: NT Optional: NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER****NO BACK
BENDING****BACK
BENDING**

	STEEL
Z MIN	31
D MIN	80
Z MIN	38
D MIN	150



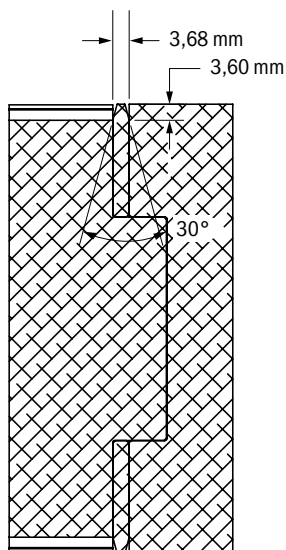
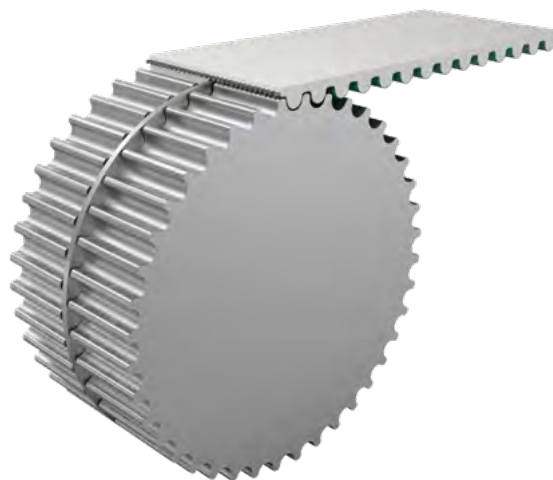
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R23T	90	-30 to +55	Optional

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (RSL)	[N]	24.220	31.140	51.900	76.120	96.880	145.320
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (RSL)	[N]	5.860	7.534	12.557	18.417	23.440	35.160
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
Steel (RSL)	[N]	1.932	2.583	4.257	6.582	8.907	13.557
BELT WEIGHT							
Steel (RSL)	[kg/m]	0,20	0,24	0,39	0,59	0,79	1,18
SPECIFIC BELT STIFFNESS							
Steel (RSL)	[N]	1.465.000	1.883.571	3.139.286	4.604.286	5.860.000	8.790.000

FEATURES + BENEFITS

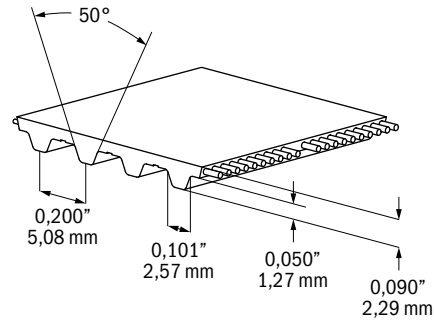
- SST8-RSL design available for high strength and high stiffness
- Reduced noise due to staggered gearing
- SST belt runs in HTD pulleys with tracking ring and offset gearing
- Standard with Nylon fabric on tooth side
- Optional with Nylon on tooth and back side
- SST8 available in widths up to 150 mm

**PULLEY DIMENSION SST8****BELT-PULLEY MESHING SST8**

SYNCHRO-POWER SST

XL / PITCH: 0,20" / 5,08MM**PRODUCT SPECIFICATIONS**

PITCH	0,200" / 5,08 mm
STANDARD THICKNESS	0,090" / 2,29 mm
WIDTH TOLERANCE	
< 2" / 50 MM WIDTH	+/-0,020" / +/-0,5 mm
> 2" / 50 MM WIDTH	+/-0,030" / +/-0,75 mm
MINIMUM WELDED BELT LENGTH	19,2" / 487,68 mm
STANDARD ROLL LENGTH	328 ft / 100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	10	10
	D MIN	16	16
	Z MIN	15	15
	D MIN	30	30

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

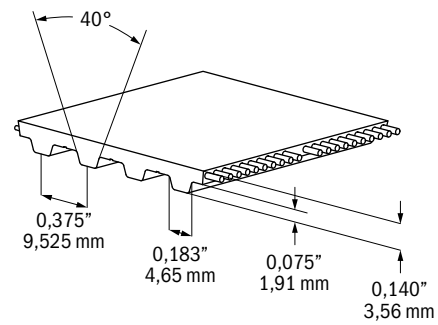
TECHNICAL DATA

STANDARD WIDTH (" / MM)	UNIT	0,25" / 6,35MM	0,31" / 7,874MM	0,375" / 9,525MM	0,50" / 12,7MM	0,75" / 19,05MM	1" / 25,4MM	2" / 50,8MM
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	750	875	1.125	1.625	2.500	3.375	6.875
Aramid (K)	[N]	1.240	1.550	1.860	2.635	4.030	5.448	11.005
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	190	221	284	411	632	853	1.738
Aramid (K)	[N]	213	266	319	452	691	930	1.887
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	95	111	142	205	316	427	869
Aramid (K)	[N]	159	199	239	339	518	698	1.415
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	157	194	235	314	470	627	1.254
BELT WEIGHT								
Steel (SL)	[kg/m]	0,01	0,02	0,02	0,03	0,04	0,06	0,11
Aramid (K)	[kg/m]	0,01	0,01	0,02	0,02	0,04	0,05	0,10
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	47.413	55.316	71.120	102.729	158.044	213.360	434.622
Aramid (K)	[N]	53.151	67.436	83.049	112.947	172.742	232.537	471.718

L / PITCH: 0,375" / 9,525MM

PRODUCT SPECIFICATIONS

PITCH	0,375" / 9,525 mm
STANDARD THICKNESS	0,140" / 3,56 mm
WIDTH TOLERANCE	
< 2" / 50 MM WIDTH	+0,020" / +0,5 mm
> 2" / 50 MM WIDTH	+0,030" / +0,75 mm
MINIMUM WELDED BELT LENGTH	19,2" / 487,68 mm
STANDARD ROLL LENGTH	328 ft / 100 m
STANDARD COLOR	Clear, Optional White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB



MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL	ARAMID
	Z MIN	10	10
	D MIN	30	30
	Z MIN	14	14
	D MIN	60	60

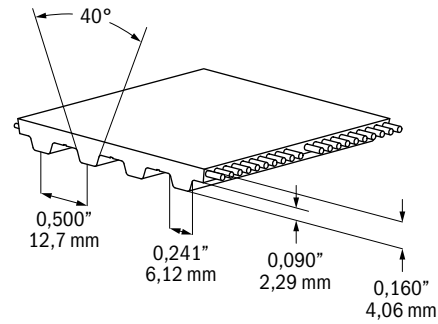

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH ("/MM)	UNIT	0,38"/9,65MM	0,50"/12,7MM	0,75"/19,05MM	1"/25,4MM	1,5"/38,1MM	2"/50,8MM	4"/101,6MM
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	2.280	3.135	4.845	6.555	9.975	13.395	27.075
Aramid (K)	[N]	2.672	3.674	5.678	7.682	11.690	15.698	31.730
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	574	790	1.221	1.652	2.513	3.375	6.821
Aramid (K)	[N]	428	588	909	1.229	1.871	2.512	5.078
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	287	395	610	826	1.257	1.687	3.411
Aramid (K)	[N]	321	441	681	922	1.403	1.884	3.808
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	505	674	1.010	1.347	2.021	2.694	5.388
BELT WEIGHT								
Steel (SL)	[kg/m]	0,03	0,04	0,07	0,09	0,13	0,18	0,36
Aramid (K)	[kg/m]	0,03	0,04	0,06	0,08	0,11	0,15	0,30
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	143.609	197.463	305.170	412.877	628.291	843.705	1.705.362
Aramid (K)	[N]	106.901	146.989	227.164	307.340	467.691	628.043	1.269.448

H / PITCH: 0,50" / 12,7MM**PRODUCT SPECIFICATIONS**

PITCH	0,500" / 12,7mm
STANDARD THICKNESS	0,16" / 4,06 mm
WIDTH TOLERANCE	
< 2" / 50 MM WIDTH	+/-0,020" / +/-0,5 mm
> 2" / 50 MM WIDTH	+/-0,030" / +/-0,75 mm
MINIMUM WELDED BELT LENGTH	
< 4" / 100MM WIDTH	19,125" / 482,6 mm
> 4" / 100MM WIDTH	38" / 965,2 mm
STANDARD ROLL LENGTH	328 ft / 100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF
Z MIN	14	14	12
D MIN	57	57	49
Z MIN	20	20	15
D MIN	80	80	60

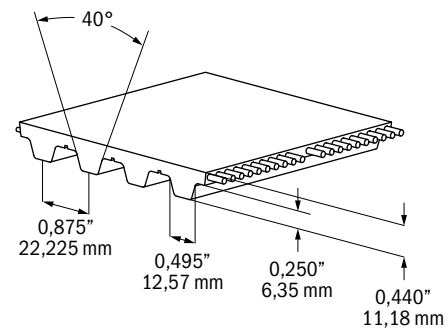
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH ("/MM)	UNIT	0,50" / 12,7MM	0,75" / 19,05MM	1" / 25,4MM	1,5" / 38,1MM	2" / 50,8MM	3" / 76,2MM	4" / 101,6MM	6" / 152,4MM
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	3.360	5.040	7.140	10.920	14.700	22.260	29.820	44.940
Aramid (K)	[N]	3.773	5.929	8.085	12.397	16.709	25.333	33.957	51.205
Steel HF (HF)	[N]	4.960	7.440	10.540	16.120	21.700	32.860	44.020	66.340
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel (SL)	[N]	912	1.369	1.939	2.966	3.992	6.045	8.098	12.205
Aramid (K)	[N]	504	792	1.081	1.657	2.233	3.386	4.538	6.843
Steel HF (HF)	[N]	1.119	1.678	2.377	3.636	4.895	7.412	9.929	14.964
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Steel (SL)	[N]	456	684	970	1.483	1.996	3.023	4.049	6.102
Aramid (K)	[N]	378	594	810	1.243	1.675	2.539	3.404	5.132
Steel HF (HF)	[N]	559	839	1.189	1.818	2.447	3.706	4.965	7.482
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	825	1.238	1.650	2.475	3.300	4.950	6.600	9.900
BELT WEIGHT									
Steel (SL)	[kg/m]	0,05	0,08	0,10	0,15	0,20	0,30	0,40	0,61
Aramid (K)	[kg/m]	0,04	0,06	0,08	0,12	0,16	0,24	0,33	0,49
Steel HF (HF)	[kg/m]	0,05	0,08	0,11	0,16	0,22	0,33	0,44	0,66
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	228.122	342.183	484.759	741.396	998.033	1.511.307	2.024.582	3.051.130
Aramid (K)	[N]	126.060	198.095	270.129	414.198	558.267	846.404	1.134.542	1.710.817
Steel HF (HF)	[N]	279.699	419.548	594.360	909.021	1.223.682	1.853.005	2.482.327	3.740.972

XH / PITCH: 0,875" / 22,225MM**PRODUCT SPECIFICATIONS**

PITCH	0,875" / 22,225 mm
STANDARD THICKNESS	0,440" / 11,18 mm
WIDTH TOLERANCE	+0,040" / +1,00 mm
MINIMUM WELDED BELT LENGTH	30,4" / 1000,76 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	18	18
	D MIN	127	127
	Z MIN	25	25
	D MIN	180	180

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH ("/MM)	UNIT	1"/25,4MM	1,5"/38,1MM	2"/50,8MM	3"/76,2MM	4"/101,6MM	6"/152,4MM
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	14.250	21.850	29.450	44.650	59.850	90.250
Aramid (K)	[N]	16.185	24.817	33.449	50.713	67.977	102.505
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	3.801	5.828	7.855	11.909	15.964	24.072
Aramid (K)	[N]	1.778	2.726	3.675	5.571	7.468	11.261
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	1.900	2.914	3.928	5.955	7.982	12.036
Aramid (K)	[N]	1.134	2.045	2.756	4.178	5.601	8.446
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	3.804	5.706	7.608	11.412	15.216	22.824
BELT WEIGHT							
Steel (SL)	[kg/m]	0,27	0,40	0,54	0,81	1,08	1,62
Aramid (K)	[kg/m]	0,23	0,35	0,46	0,69	0,92	1,39
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	950.214	1.456.995	1.963.776	2.977.337	3.990.899	6.018.022
Aramid (K)	[N]	444.500	681.567	918.633	1.392.767	1.866.900	2.815.167

E-BELT

GATES TPU E-BELT TRANSMIT ELECTRICAL POWER AND SIGNALS

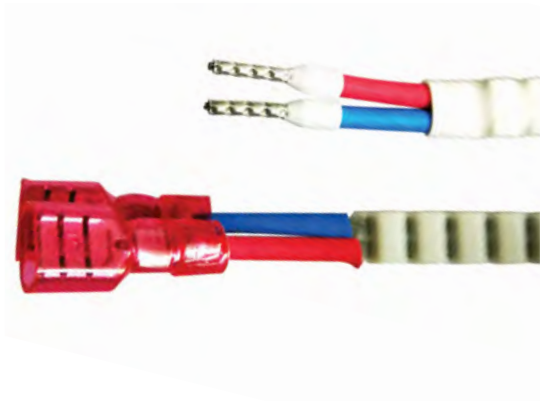
Gates TPU e-belts are Synchro-Power Linear belts that can transmit electric power or signals while incorporating the high tensile strength of the steel reinforcement. The steel cords are exposed at the belt ends for electrical connector attachment. The open-ended e-Belts can be cut to custom length. Several timing belt pitches and flat belts are available.

PRODUCT SPECIFICATIONS

PITCH	T5 / T10 / T20 / AT5 / ATL5 / AT10 ATL10 / F20 / WR5 / WRT10 WRAT10
CORD	Steel, Steel HF, Stainless Steel
COLOR	White, F20 Black
FDA/EU APPROVAL	No
POLYURETHANE	92° Shore A
POLYAMIDE FABRIC	N/A
TEMPERATURE RANGE	-5 °C to +60 °C
MAXIMUM VOLTAGE	24V DC
MAXIMUM ELECTRICAL POWER	Depending on cord construction
OTHER TECHNICAL DATA	Depending on belt construction

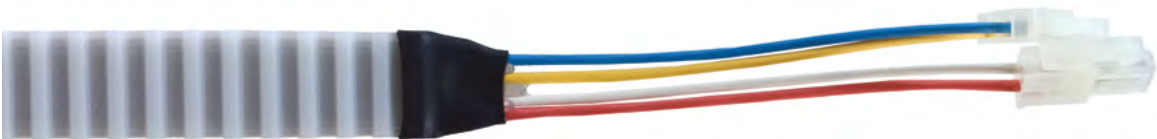
Gates e-Belts supply limited electric power to small motors or actuators and can transmit electrical signals. The maximum power is determined by the construction and the number of steel cords used for the electrical transmission. Gates TPU delivers customized solutions with your specified connectors applied to the belt.

USING GATES E-BELT CAN SAVE COST AND SPACE FOR SEPARATE ELECTRICAL CABLES AND CABLE GUIDING SYSTEMS



FEATURES + BENEFITS

- Belt with exposed steel cords
- Optional applied connectors
- Synchronous belt pitches or flat belt
- Electric power transmission up to 24V DC
- Maximum power depends upon steel cord construction
- Electrical signal transmission
- Steel reinforcement options for a wide range of applications
- Available within WR Belt series with fully encapsulated cord
- EU, RoHS, and REACH compliant
- Engineering support for custom designs



WR – WATER RESISTANT BELTS

LINEAR WR

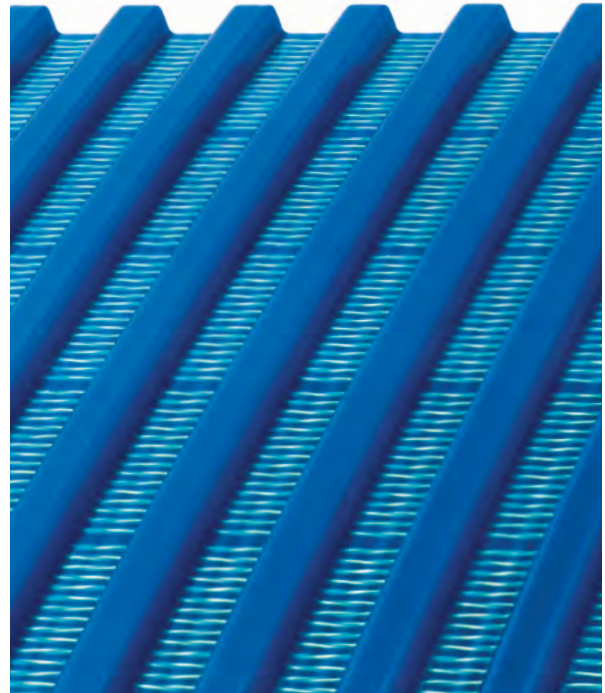
Gates Synchro-Power Linear WR series belts are designed for applications in highly corrosive environments and/or for the requirements in applications with direct food contact and the related cleaning processes.

The fully encapsulated cord is not exposed to the environment, prevents hidden contaminations and is easy to clean.

Extruded with wear resistant polyurethane the belt can be equipped with steel or Aramid cord. Various cord options offer fit for purpose tensile strength and stiffness at small pulley diameters.

Backings and profiles suitable for food contact are available for customized conveying and transportation solutions.

SYNCHRO-POWER LINEAR WR SERIES BELTS ARE COMMONLY USED AS ENDLESS WELDED BELT IN CONVEYING AND PROCESSING APPLICATIONS OR IN HIGHLY CORROSIVE ENVIRONMENTS.



ATTRIBUTES

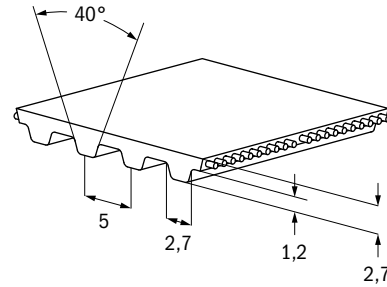
- Fully encapsulated cord
- Excellent resistance to chemicals and corrosion
- Steel or Aramid reinforcement
- Certified for wet and dry food contact
- Meets FDA and EU food regulations
- High level of hygienic integrity, easy to clean

APPLICATIONS

- In corrosive environments: outdoor equipment, sunshades, chemical industry
- Food conveying applications

WR5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,7 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	500 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Blue, optional White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	10	10
	D MIN	16	16
	Z MIN	15	15
	D MIN	30	30

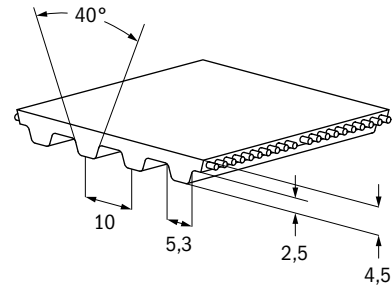
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R9	92	-5 to +70	FDA Standard

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	1.250	2.000	3.375	4.250	6.875	10.375	13.875
Aramid (K)	[N]	2.670	4.539	7.209	9.345	14.685	22.161	29.637
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	311	498	840	1.058	1.711	2.582	3.453
Aramid (K)	[N]	339	576	916	1.187	1.865	2.814	3.764
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	156	249	420	529	856	1.291	1.727
Aramid (K)	[N]	254	432	687	890	1.399	2.111	2.823
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	250	400	625	800	1.250	1.875	2.500
BELT WEIGHT								
Steel (SL)	[kg/m]	0,02	0,04	0,06	0,07	0,11	0,17	0,22
Aramid (K)	[kg/m]	0,02	0,03	0,05	0,06	0,10	0,15	0,20
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	77.778	124.444	210.000	264.444	427.778	645.556	863.333
Aramid (K)	[N]	84.769	144.106	228.875	296.690	466.227	703.579	940.931

WRT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	4,5 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-0,50 mm
> 50MM WIDTH	+/-0,75 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	500 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Standard Blue, optional White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF
Z MIN	14	14	12
D MIN	45	45	38
Z MIN	20	20	15
D MIN	60	60	50



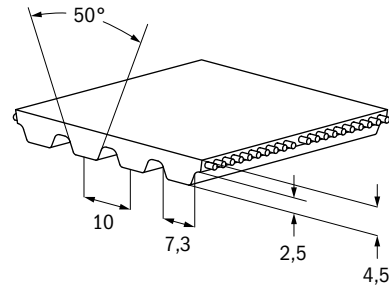
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R9	92	-5 to +70	FDA Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	12	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	2.940	4.200	7.140	9.240	14.700	22.260	29.820	44.940
Aramid (K)	[N]	3.234	4.851	8.085	10.241	16.709	25.333	33.957	51.205
Steel HF (HF)	[N]	4.340	6.200	10.540	13.640	21.700	32.860	44.020	66.340
ALLOWABLE BELT FORCE / OPEN ENDED									
Steel (SL)	[N]	786	1.123	1.909	2.470	3.929	5.950	7.971	12.012
Aramid (K)	[N]	425	638	1.064	1.347	2.198	3.332	4.467	6.736
Steel HF (HF)	[N]	964	1.376	2.340	3.028	4.818	7.295	9.773	14.728
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Steel (SL)	[N]	393	561	954	1.235	1.965	2.975	3.985	6.006
Aramid (K)	[N]	319	479	798	1.010	1.648	2.499	3.350	5.052
Steel HF (HF)	[N]	482	688	1.170	1.514	2.409	3.648	4.886	7.364
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	683	910	1.423	1.821	2.845	4.268	5.690	8.535
BELT WEIGHT									
Steel (SL)	[kg/m]	0,05	0,06	0,09	0,11	0,18	0,27	0,36	0,54
Aramid (K)	[kg/m]	0,04	0,06	0,09	0,11	0,18	0,27	0,36	0,54
Steel HF (HF)	[kg/m]	0,05	0,07	0,11	0,15	0,23	0,35	0,47	0,70
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	196.463	280.662	477.125	617.456	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	106.350	159.525	265.875	336.775	549.475	833.075	1.116.675	1.683.875
Steel HF (HF)	[N]	240.882	344.118	585.000	757.059	1.204.412	1.823.824	3.443.235	5.168.059

WRAT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	4,5 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ - 0,75 mm
> 50MM WIDTH	+ - 1,00 mm
MINIMUM WELDED BELT LENGTH	
< 100MM WIDTH	500 mm
> 100MM WIDTH	960 mm
STANDARD ROLL LENGTH	100 m
STANDARD COLOR	Standard Blue, optional White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	15	15
	D MIN	48	48
	Z MIN	25	25
	D MIN	120	120

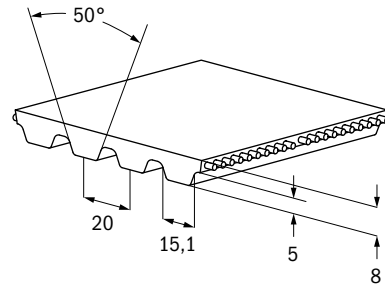

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R9	92	-5 to +70	FDA Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	8.550	14.250	18.050	29.450	44.650	59.850	90.250
Aramid (K)	[N]	9.711	16.185	20.501	33.449	50.713	67.977	102.505
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	2.245	3.741	4.739	7.731	11.722	15.712	23.693
Aramid (K)	[N]	1.005	1.675	2.121	3.461	5.247	7.033	10.606
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	1.122	1.871	2.369	3.866	5.861	7.856	11.847
Aramid (K)	[N]	754	1.256	1.591	2.596	3.935	5.275	7.954
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	1.651	2.580	3.302	5.160	7.740	10.320	15.480
BELT WEIGHT								
Steel (SL)	[kg/m]	0,09	0,14	0,18	0,29	0,43	0,57	0,86
Aramid (K)	[kg/m]	0,07	0,11	0,13	0,21	0,32	0,42	0,63
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	561.150	935.250	1.184.650	1.932.850	2.930.450	3.928.050	5.923.250
Aramid (K)	[N]	251.190	418.650	530.290	865.210	1.311.770	1.758.330	2.651.450

WRATL20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
STANDARD THICKNESS	8,0 mm
WIDTH TOLERANCE	+/-2,0 mm
MINIMUM WELDED BELT LENGTH	N/A
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL
Z MIN	25
D MIN	159
Z MIN	30
D MIN	250

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	50	75	100	150	155
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	70.400	105.600	144.000	217.600	224.000
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel (SL)	[N]	15.410	23.115	31.520	47.631	49.032
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	10.900	16.350	21.800	32.700	33.790
BELT WEIGHT						
Steel (SL)	[kg/m]	0,54	0,81	1,08	1,63	1,68
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	3.852.500	5.778.749	7.880.113	11.907.726	12.257.953



SELF-TRACKING BELTS

TRACKING BELTS

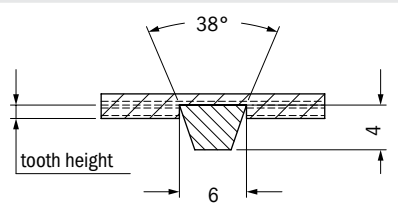
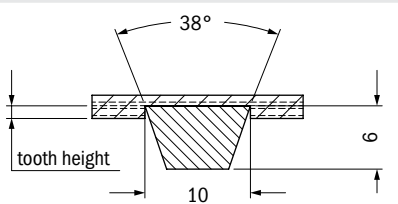
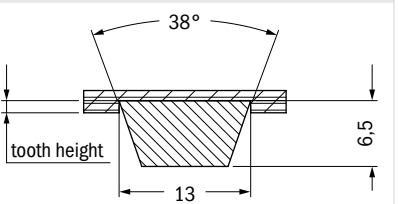
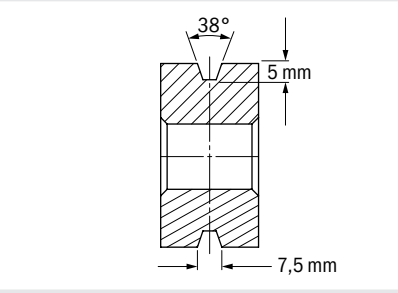
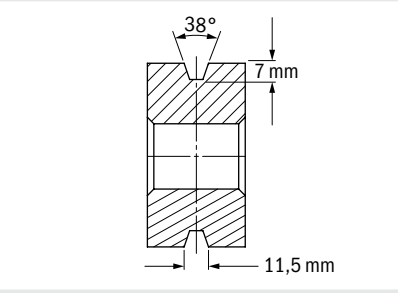
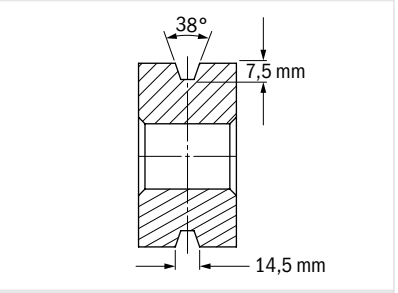
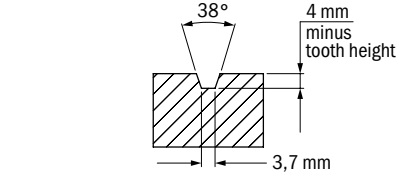
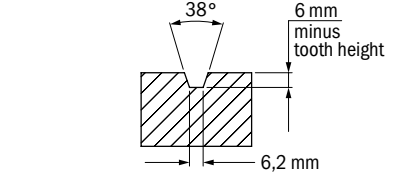
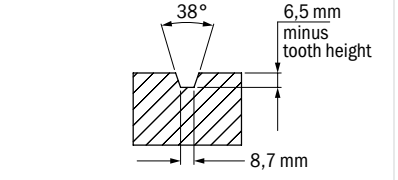
Gates TPU Self Tracking Belts are composed of our standard polyurethane belts and our specially designed polyurethane V-Guides, which provide highest flexibility and allow the use of small pulley diameters. Self-tracking belts can be manufactured in two different production processes depending on your need:

- **FABRICATED V-GUIDES ARE APPLIED TO STANDARD BELT VIA A SECONDARY OPERATION AND CAN BE COMBINED WITH ANY BELT TYPE AND BELT WIDTH.**
- **INTEGRAL V-GUIDES ARE INTEGRATED BY CO-EXTRUSION IN THE BELT PRODUCTION PROCESS AND ENSURE HIGHER STRENGTH AND CONSISTENCY.**

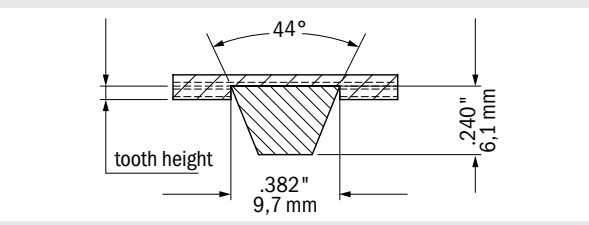
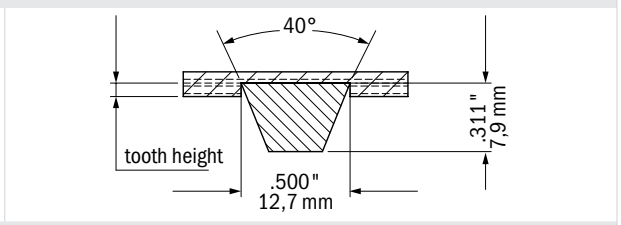
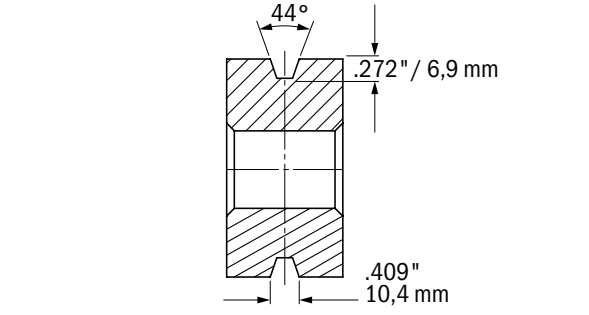
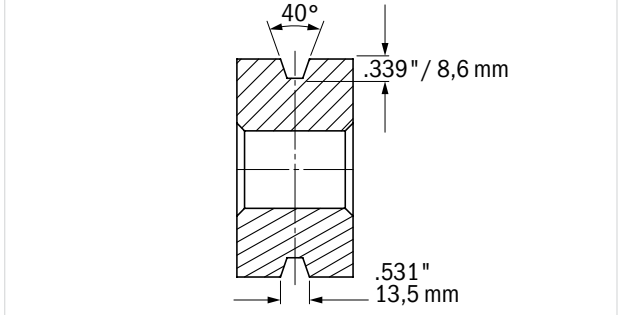
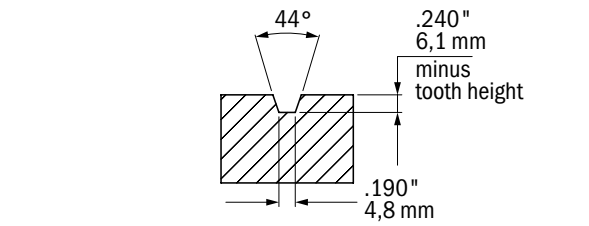
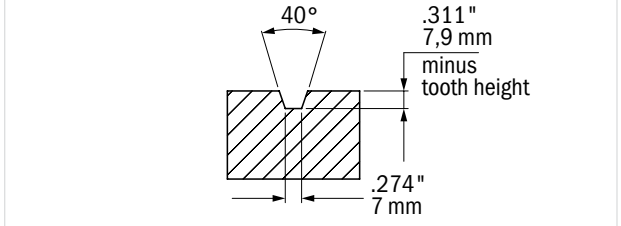


ATTRIBUTES	APPLICATIONS	PROCESSING OPTIONS
■ V-Guides can be added to nearly every belt type ■ Synchronous operations ■ Operation without flanged pulleys possible ■ Reliable tracking which is not affected by lateral forces ■ Reduction of lateral movement	■ Where lateral forces apply and pulleys with flanges cannot be used ■ Long length conveying or linear / rotary positioning, where tracking is an issue ■ Conveying applications where design considerations prevent the use of pulley flanges	■ Backings - Further information on page 97 ■ Profiles - Further information on page 103 ■ Special processing - Further information on page 109

FOR METRIC TOOTH PITCH BELTS

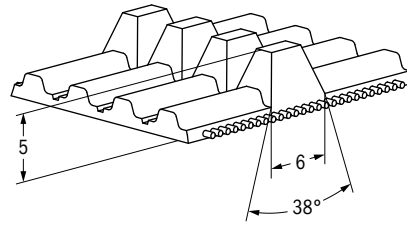
K6-SECTION	K10-SECTION	K13-SECTION
BELT DIMENSIONS		
		
PULLEY DIMENSIONS		
		
SLIDER BED DIMENSIONS		
		

FOR IMPERIAL TOOTH PITCH BELTS

O-SECTION	A-SECTION
BELT DIMENSIONS	
	
PULLEY DIMENSIONS	
	
SLIDER BED DIMENSIONS	
	

T5V / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
INTEGRATED V-GUIDE	K6
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	25	25
	D MIN	40	40
	Z MIN	28	28
	D MIN	80	80

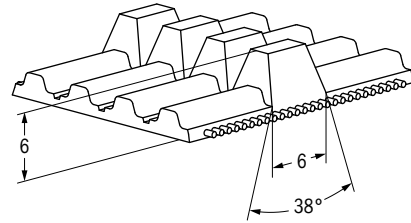
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only



TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	2.000	3.375	4.250	6.875	10.375	13.875
Aramid (K)	[N]	4.539	7.209	9.345	14.685	22.161	29.637
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	498	840	1.058	1.711	2.582	3.453
Aramid (K)	[N]	576	916	1.187	1.865	2.814	3.764
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	249	420	529	856	1.291	1.727
Aramid (K)	[N]	432	687	890	1.399	2.111	2.823
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	250	475	650	1.100	1.725	2.350
BELT WEIGHT							
Steel (SL)	[kg/m]	0,07	0,08	0,09	0,13	0,19	0,24
Aramid (K)	[kg/m]	0,06	0,07	0,08	0,12	0,17	0,22
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	124.444	210.000	264.444	427.778	645.556	863.333
Aramid (K)	[N]	144.106	228.875	296.690	466.227	703.579	940.931

T10VS / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
INTEGRATED V-GUIDE	K6
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	20	20
	D MIN	64	64
	Z MIN	25	25
	D MIN	80	80

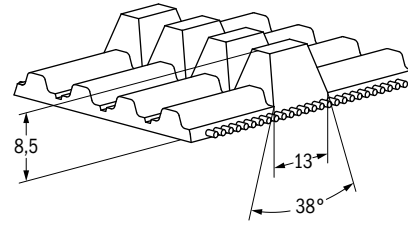
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only



TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	4.200	7.140	9.240	14.700	22.260	29.820	44.940
Aramid (K)	[N]	4.851	8.085	10.241	16.709	25.333	33.957	51.205
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	1.123	1.909	2.470	3.929	5.950	7.971	12.012
Aramid (K)	[N]	638	1.064	1.347	2.198	3.332	4.467	6.736
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	561	954	1.235	1.965	2.975	3.985	6.006
Aramid (K)	[N]	479	798	1.010	1.648	2.499	3.350	5.052
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	569	1.081	1.479	2.504	3.926	5.349	8.194
BELT WEIGHT								
Steel (SL)	[kg/m]	0,09	0,13	0,16	0,24	0,35	0,46	0,67
Aramid (K)	[kg/m]	0,06	0,11	0,13	0,20	0,27	0,36	0,54
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	280.662	477.125	617.456	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	159.525	265.875	336.775	549.475	833.075	1.116.675	1.683.875

T10V / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
INTEGRATED V-GUIDE	K13
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50m Optional 100m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	20	20
	D MIN	64	64
	Z MIN	25	25
	D MIN	80	80

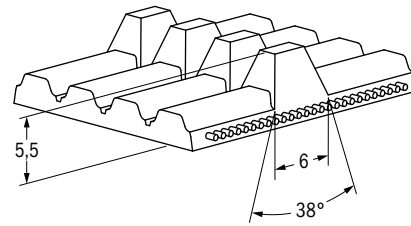
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	7.140	9.240	14.700	22.260	29.820	44.940
Aramid (K)	[N]	8.085	10.241	16.709	25.333	33.957	51.205
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	1.909	2.470	3.929	5.950	7.971	12.012
Aramid (K)	[N]	1.064	1.347	2.198	3.332	4.467	6.736
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	954	1.235	1.965	2.975	3.985	6.006
Aramid (K)	[N]	798	1.010	1.648	2.499	3.350	5.052
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	683	1.081	2.105	3.528	4.950	7.795
BELT WEIGHT							
Steel (SL)	[kg/m]	0,18	0,21	0,29	0,40	0,50	0,72
Aramid (K)	[kg/m]	0,16	0,18	0,25	0,34	0,43	0,61
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	477.125	617.456	928.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	265.875	336.775	549.475	833.075	1.116.675	1.683.875

AT5V / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
INTEGRATED V-GUIDE	K6
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	25	25
	D MIN	40	40
	Z MIN	28	28
	D MIN	80	80

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

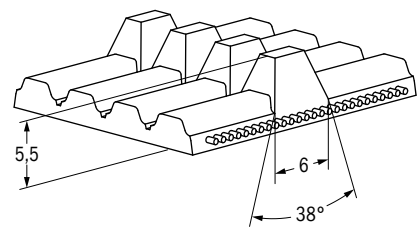
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50
BREAKING FORCE / AVERAGE VALUE					
Steel (SL)	[N]	4.275	7.125	9.120	14.535
Aramid (K)	[N]	5.010	8.350	10.688	17.034
ALLOWABLE BELT FORCE / OPEN ENDED					
Steel (SL)	[N]	1.056	1.761	2.253	3.591
Aramid (K)	[N]	757	1.210	1.562	2.468
ALLOWABLE BELT FORCE / ENDLESS WELDED					
Steel (SL)	[N]	528	880	1.127	1.796
Aramid (K)	[N]	568	908	1.172	1.851
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH					
	[N]	480	912	1.248	2.112
BELT WEIGHT					
Steel (SL)	[kg/m]	0,08	0,10	0,12	0,18
Aramid (K)	[kg/m]	0,07	0,09	0,11	0,16
SPECIFIC BELT STIFFNESS					
Steel (SL)	[N]	264.075	440.125	563.360	897.855
Aramid (K)	[N]	181.500	302.500	387.200	617.100

ATL5V / PITCH: 5MM

PRODUCT SPECIFICATIONS

PITCH	5 mm
INTEGRATED V-GUIDE	K6
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB



MIN PULLEY TOOTH COUNT AND DIAMETER

		STEEL
	Z MIN	25
	D MIN	40
	Z MIN	28
	D MIN	80

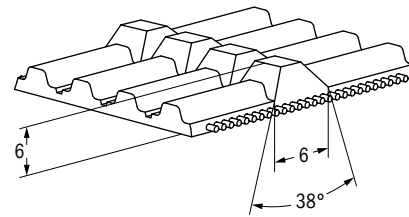
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50
BREAKING FORCE / AVERAGE VALUE					
Steel (SL)	[N]	6.200	10.540	13.640	21.700
ALLOWABLE BELT FORCE / OPEN ENDED					
Steel (SL)	[N]	1.376	2.340	3.028	4.818
ALLOWABLE BELT FORCE / ENDLESS WELDED					
Steel (SL)	[N]	688	1.170	1.514	2.409
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH					
	[N]	480	912	1.248	2.112
BELT WEIGHT					
Steel (SL)	[kg/m]	0,08	0,11	0,14	0,20
SPECIFIC BELT STIFFNESS					
Steel (SL)	[N]	344.118	585.000	757.059	1.204.412

AT10VS / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
INTEGRATED V-GUIDE	K6
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,75 mm
> 50MM WIDTH	+ -1,00 mm
MINIMUM WELDED BELT LENGTH	1.000 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	20	20
	D MIN	64	64
	Z MIN	25	25
	D MIN	120	120

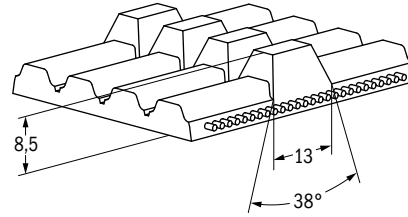

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	14.250	18.050	29.450	44.650	59.850	90.250
Aramid (K)	[N]	16.185	20.501	33.449	50.713	67.977	102.505
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	3.741	4.739	7.731	11.722	15.712	23.693
Aramid (K)	[N]	1.675	2.121	3.461	5.247	7.033	10.606
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	1.871	2.369	3.866	5.861	7.856	11.847
Aramid (K)	[N]	1.256	1.591	2.596	3.935	5.275	7.954
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	1.961	2.683	4.541	7.121	9.701	14.861
BELT WEIGHT							
Steel (SL)	[kg/m]	0,21	0,25	0,35	0,50	0,64	0,93
Aramid (K)	[kg/m]	0,17	0,20	0,28	0,38	0,41	0,62
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	935.250	1.184.650	1.932.850	2.930.450	3.928.050	5.923.250
Aramid (K)	[N]	418.650	530.290	865.210	1.311.770	1.758.330	2.651.450

AT10V / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
INTEGRATED V-GUIDE	K13
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,75 mm
> 50MM WIDTH	+ -1,00 mm
MINIMUM WELDED BELT LENGTH	960 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50m Optional 100m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	20	20	18	32
D MIN	64	64	57	102
Z MIN	25	25	22	40
D MIN	120	120	100	150

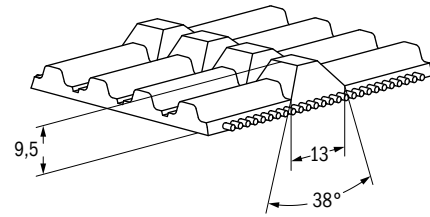
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only



TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	17.100	20.900	34.200	51.300	68.400	102.600
Aramid (K)	[N]	16.185	20.501	33.449	50.713	67.977	102.505
Steel HF (HF)	[N]	12.975	16.435	26.815	40.655	N/A	N/A
Stainless Steel (NIRO)	[N]	10.688	13.538	22.088	33.488	N/A	N/A
ALLOWABLE BELT FORCE / OPEN ENDED							
Steel (SL)	[N]	4.209	5.144	8.417	12.626	16.835	25.252
Aramid (K)	[N]	1.675	2.121	3.461	5.247	7.033	10.606
Steel HF (HF)	[N]	3.456	4.378	7.142	10.829	N/A	N/A
Stainless Steel (NIRO)	[N]	2.806	3.554	5.799	8.791	N/A	N/A
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Steel (SL)	[N]	2.104	2.572	4.209	6.313	8.417	12.626
Aramid (K)	[N]	1.256	1.591	2.596	3.935	5.275	7.954
Steel HF (HF)	[N]	1.728	2.189	3.571	5.414	N/A	N/A
Stainless Steel (NIRO)	[N]	1.403	1.777	2.899	4.396	N/A	N/A
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	1.238	1.961	3.818	6.398	8.978	14.138
BELT WEIGHT							
Steel (SL)	[kg/m]	0,21	0,25	0,35	0,50	0,64	0,93
Aramid (K)	[kg/m]	0,17	0,20	0,28	0,38	0,49	0,68
Steel HF (HF)	[kg/m]	0,20	0,24	0,34	0,48	N/A	N/A
Stainless Steel (NIRO)	[kg/m]	0,21	0,25	0,35	0,49	N/A	N/A
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.052.156	1.285.969	2.104.313	3.156.469	4.208.625	6.312.938
Aramid (K)	[N]	418.650	530.290	865.210	1.311.770	1.758.330	2.651.450
Steel HF (HF)	[N]	864.000	1.094.400	1.785.600	2.707.200	N/A	N/A
Stainless Steel (NIRO)	[N]	701.438	888.488	1.449.639	2.197.839	N/A	N/A

AT20V / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
INTEGRATED V-GUIDE	K13
WIDTH TOLERANCE	
< 50MM WIDTH	+/- 1,0 mm
> 50MM WIDTH	+/- 1,50 mm
MINIMUM WELDED BELT LENGTH	1.000 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	20	20
	D MIN	127	127
	Z MIN	25	25
	D MIN	180	180

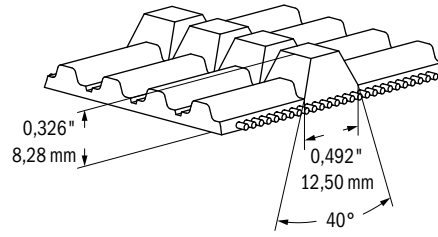
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	31.140	50.170	76.120	102.070	153.970
Aramid (K)	[N]	28.026	45.153	68.508	91.863	138.573
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel (SL)	[N]	7.534	12.139	18.417	24.696	37.253
Aramid (K)	[N]	2.585	4.120	6.251	8.382	12.643
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Steel (SL)	[N]	3.767	6.069	9.209	12.139	18.626
Aramid (K)	[N]	1.939	3.090	4.688	6.286	9.483
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	4.142	8.066	13.516	18.966	29.866
BELT WEIGHT						
Steel (SL)	[kg/m]	0,31	0,48	0,73	0,97	1,45
Aramid (K)	[kg/m]	0,23	0,37	0,55	0,73	1,10
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	1.883.571	3.034.643	4.604.286	6.173.929	9.313.214
Aramid (K)	[N]	646.373	1.029.935	1.562.660	2.095.385	3.160.836

HV / PITCH: 0.50"**PRODUCT SPECIFICATIONS**

PITCH	0,500" / 12,7mm
INTEGRATED V-GUIDE	A-Section
WIDTH TOLERANCE	
< 2" / 50 MM WIDTH	+/-0,020" / +/-0,5 mm
> 2" / 50 MM WIDTH	+/-0,030" / +/-0,75 mm
MINIMUM WELDED BELT LENGTH	36" / 914,4 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	16	16
	D MIN	65	65
	Z MIN	20	20
	D MIN	80	80

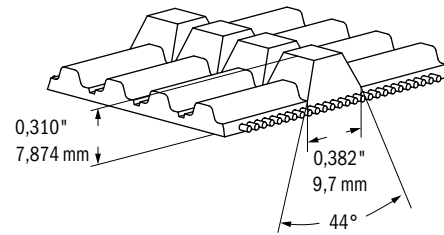
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	1,5"/38,1MM	2"/50,8MM	3"/76,2MM	4"/101,6MM	6"/152,4MM
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	10.920	14.700	22.260	29.820	44.940
Aramid (K)	[N]	12.397	16.709	25.333	33.957	51.205
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel (SL)	[N]	2.919	3.929	5.950	7.971	12.012
Aramid (K)	[N]	1.657	2.233	3.386	4.538	6.843
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Steel (SL)	[N]	1.459	1.965	2.975	3.985	6.006
Aramid (K)	[N]	1.243	1.675	2.539	3.404	5.132
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	1.663	2.488	4.138	5.788	9.088
BELT WEIGHT						
Steel (SL)	[kg/m]	0,22	0,27	0,37	0,47	0,67
Aramid (K)	[kg/m]	0,19	0,23	0,31	0,39	0,56
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	729.721	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	414.198	558.267	846.404	1.134.542	1.710.817

HVO / PITCH: 0.50"**PRODUCT SPECIFICATIONS**

PITCH	0,500" / 12,7mm
INTEGRATED V-GUIDE	O-Section
WIDTH TOLERANCE	
< 2" / 50 MM WIDTH	+0,020" / +0,5 mm
> 2" / 50 MM WIDTH	+0,030" / +0,75 mm
MINIMUM WELDED BELT LENGTH	36" / 914,4 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	200 ft / 61 m
STANDARD COLOR	Clear
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	ARAMID
	Z MIN	16	16
	D MIN	65	65
	Z MIN	20	20
	D MIN	80	80

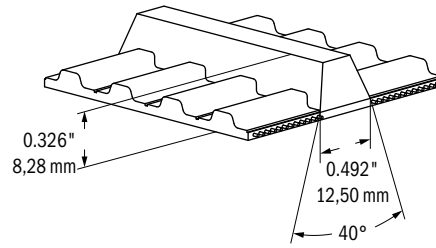

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH ("/MM)	UNIT	1,5"/38,1MM	2"/50,8MM	3"/76,2MM	4"/101,6MM	6"/152,4MM
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	10.920	14.700	22.260	29.820	44.940
Aramid (K)	[N]	12.397	16.709	25.333	33.957	51.205
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel	[N]	2.919	3.929	5.950	7.971	12.012
Aramid (K)	[N]	1.657	2.233	3.386	4.538	6.843
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Steel (SL)	[N]	1.459	1.965	2.975	3.985	6.006
Aramid (K)	[N]	1.243	1.675	2.539	3.404	5.132
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	1.845	2.670	4.320	5.970	9.270
BELT WEIGHT						
Steel (SL)	[kg/m]	0,19	0,25	0,35	0,45	0,65
Aramid (K)	[kg/m]	0,16	0,21	0,29	0,37	0,56
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	729.721	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	414.198	558.267	846.404	1.134.542	1.710.817

WHV / PITCH: 0,50" / 12,7MM**PRODUCT SPECIFICATIONS**

PITCH	0,500" / 12,7mm
INTEGRATED V-GUIDE	A-Section
MINIMUM WELDED BELT LENGTH	43,5" / 1104,9 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	200 feet / 61 m
STANDARD COLOR	Clear
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	ARAMID
Z MIN	16
D MIN	3,00" / 67 mm
Z MIN	20
D MIN	4,2" / 107 mm

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	With Aramid Cord Only

TECHNICAL DATA

STANDARD WIDTH ("/ MM)	UNIT	6" / 152,4 MM	8" / 203,2 MM	10" / 254 MM	12" / 304,8 MM	14" / 355,6 MM	18" / 457,2 MM
BREAKING FORCE / AVERAGE VALUE							
Aramid (K)	[N]	25.333	34.496	43.120	51.744	60.368	77.077
ALLOWABLE BELT FORCE / OPEN ENDED							
Aramid (K)	[N]	6.750	9.191	11.489	13.787	16.085	20.537
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Aramid (K)	[N]	3.375	4.596	5.745	6.894	8.042	10.269
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	9.075	12.375	15.675	18.975	22.275	28.875
BELT WEIGHT							
Aramid (K)	[kg/m]	0,5	0,7	0,8	1,0	1,1	1,4
SPECIFIC BELT STIFFNESS							
Aramid (K)	[N]	843.744	1.148.928	1.436.160	1.723.392	2.010.624	2.567.136

SYNCHRO-POWER FLAT

FLAT BELTS

Gates TPU flat belts made from high strength polyurethane are produced in standard rolls or open ended belts and are commonly used in lifting and pulling applications. Flat belts are typically attached at one or both ends with clamping plates or with our new FIX-FLAT clamping system

Our flat belts are suited for a wide range of mechanical requirements. We offer various combinations of polyurethane types and cords to support the diverse needs of the market.

OUR LATEST DEVELOPMENT FIX-FLAT, THE FLAT BELT CLAMP, ENABLES THE SECURE CLAMPING OF ANY FLAT BELTS AT BOTH ENDS EASILY, QUICKLY AND SAFELY.



FEATURES

- Smooth, vibration free operation
- High strength combined with low elongation
- Sealed belt edges result in no cord fraying
- Easy belt guide with flanged pulleys or guiding rails
- No re-tensioning required

TYPICAL APPLICATIONS:

- Heavy load lifting or lowering
- Exercise machines
- Applications with small pulley diameters

PROCESSING OPTIONS:

- Backings - Further information on page 97
- Profiles - Further information on page 103
- Special processing - Further information on page 109

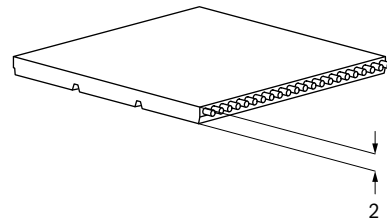
CLAMP CONNECTION

- Clamp Connection Fix-Flat - Further information on page 65

F 20

PRODUCT SPECIFICATIONS

STANDARD THICKNESS	2 mm
MINIMUM WELDED BELT LENGTH	880 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/- 0,5 mm
> 50MM WIDTH	+/- 0,75 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Black
FDA/ EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB



MIN PULLEY DIAMETER

	STEEL	ARAMID	STEEL HF	STEEL RSL	ARAMID RKV	STEEL RHF	STAINLESS STEEL (NIRO)
PULLEY ON FLIGHT SIDE	35	35	30	48	48	38	48
IDLER ON THE BACK	60	60	50	72	72	57	72

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	

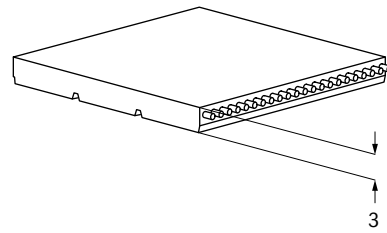
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	16	25	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	2.520	4.200	7.140	14.700	22.260	29.820	44.940
Aramid (K)	[N]	2.695	4.851	8.085	16.709	25.333	33.957	51.205
Steel HF (HF)	[N]	3.720	6.200	10.540	21.700	32.860	44.020	66.340
Steel RSL	[N]	4.750	8.550	14.250	29.450	44.650	59.850	90.250
Aramid RKV	[N]	5.395	9.711	16.158	33.449	50.713	67.977	102.505
Steel RHF	[N]	4.325	7.785	12.975	26.815	40.655	54.495	82.175
Stainless Steel (NIRO)	[N]	3.563	6.413	10.688	22.068	33.488	44.888	67.688
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	842	1.403	2.386	4.912	7.438	9.963	15.015
Aramid (K)	[N]	425	655	1.064	2.747	4.165	5.583	8.419
Steel HF (HF)	[N]	1.032	1.721	2.925	6.022	9.119	12.216	18.410
Steel RSL	[N]	1.559	2.806	4.676	9.664	14.652	19.640	29.616
Aramid RKV	[N]	698	1.256	2.093	4.326	6.559	8.792	13.257
Steel RHF	[N]	1.440	2.592	4.320	8.928	13.536	18.144	27.360
Stainless Steel (NIRO)	[N]	1.169	2.104	3.507	7.248	10.989	14.730	22.212
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	421	702	1.193	2.456	3.719	4.982	7.508
Aramid (K)	[N]	222	399	665	1.347	2.083	2.792	4.210
Steel HF (HF)	[N]	516	860	1.463	3.011	4.560	6.108	9.205
Steel RSL	[N]	779	1.403	2.338	4.832	7.326	9.820	14.808
Aramid RKV	[N]	349	628	1.047	2.163	3.279	4.396	6.629
Steel RHF	[N]	720	1.296	2.160	4.464	6.768	9.072	13.680
Stainless Steel (NIRO)	[N]	585	1.052	1.754	3.624	5.495	7.365	11.106
BELT WEIGHT								
Steel (SL)	[kg/m]	0,03	0,05	0,07	0,15	0,22	0,30	0,45
Aramid (K)	[kg/m]	0,02	0,04	0,06	0,11	0,17	0,23	0,34
Steel HF (HF)	[kg/m]	0,03	0,05	0,08	0,17	0,25	0,33	0,50
Steel RSL	[kg/m]	0,04	0,06	0,09	0,19	0,28	0,38	0,57
Aramid RKV	[kg/m]	0,02	0,04	0,05	0,11	0,16	0,22	0,33
Steel RHF	[kg/m]	0,04	0,06	0,09	0,18	0,26	0,35	0,53
Stainless Steel (NIRO)	[kg/m]	0,04	0,06	0,09	0,19	0,28	0,37	0,56
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	168.397	280.662	477.125	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	88.625	159.525	265.875	549.475	833.075	1.116.675	1.683.875
Steel HF (HF)	[N]	206.471	344.118	585.000	1.204.412	1.823.824	2.443.235	3.682.059
Steel RSL	[N]	311.750	561.150	935.250	1.932.850	2.930.450	3.928.050	5.923.250
Aramid RKV	[N]	139.550	251.190	418.650	865.210	1.311.770	1.758.330	2.651.450
Steel RHF	[N]	288.000	518.400	864.000	1.785.600	2.707.200	3.628.800	5.472.000
Stainless Steel (NIRO)	[N]	233.813	420.863	701.438	1.449.639	2.197.839	2.946.040	4.442.441

F30

PRODUCT SPECIFICATIONS

STANDARD THICKNESS	3 mm
MINIMUM WELDED BELT LENGTH	880 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/- 1,0 mm
> 50MM WIDTH	+/- 1,5 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	100 m
STANDARD COLOR	Black
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB



MIN PULLEY DIAMETER

	STEEL	ARAMID	ARAMID RKV	STEEL HF	STAINLESS STEEL (NIRO)
PULLEY ON FLIGHT SIDE	80	60	80	64	140
IDLER ON THE BACK	120	120	150	96	200

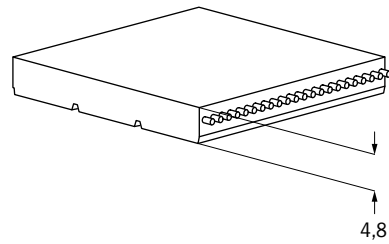
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	16	25	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	8.650	13.840	24.220	50.170	76.120	102.070	153.970
Aramid (K)	[N]	2.695	4.851	8.085	16.709	25.333	33.957	51.205
Aramid RKV	[N]	7.785	12.456	21.798	45.153	65.508	91.863	138.573
Steel HF (HF)	[N]	9.625	15.400	26.950	55.825	84.700	113.575	171.325
Steel RSL	[N]	9.600	19.200	32.000	70.400	105.600	144.000	217.600
ALLOWABLE BELT FORCE / OPEN ENDED								
Steel (SL)	[N]	2.616	4.186	7.325	15.173	23.021	30.870	46.566
Aramid (K)	[N]	443	798	1.329	2.747	4.165	5.583	8.419
Aramid RKV	[N]	888	1.421	2.486	5.150	7.813	10.477	15.804
Steel HF (HF)	[N]	2.267	3.628	6.349	13.151	19.953	26.755	40.360
Steel RSL	[N]	2.627	5.253	8.756	19.262	28.894	39.401	59.539
ALLOWABLE BELT FORCE / ENDLESS WELDED								
Steel (SL)	[N]	1.308	2.093	3.663	7.587	11.511	15.435	23.283
Aramid (K)	[N]	222	399	665	1.374	2.083	2.792	4.210
Aramid RKV	[N]	444	710	1.243	1.509	3.907	5.238	7.902
Steel HF (HF)	[N]	1.134	1.814	3.174	6.575	9.977	13.378	20.180
Steel RSL	[N]	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BELT WEIGHT								
Steel (SL)	[kg/m]	0,06	0,09	0,15	0,29	0,44	0,59	0,88
Aramid (K)	[kg/m]	0,03	0,05	0,08	0,15	0,23	0,31	0,46
Aramid RKV	[kg/m]	0,03	0,05	0,08	0,16	0,24	0,32	0,48
Steel HF (HF)	[kg/m]	0,06	0,10	0,16	0,32	0,48	0,64	0,96
Steel RSL	[kg/m]	0,07	0,11	0,18	0,35	0,53	0,70	1,06
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	523.214	837.143	1.465.000	3.034.643	4.604.286	6.173.929	9.313.214
Aramid (K)	[N]	88.625	159.525	265.875	549.475	833.075	1.116.675	1.683.875
Aramid RKV	[N]	177.575	284.120	497.210	1.029.750	1.562.660	2.095.385	3.160.836
Steel HF (HF)	[N]	453.482	725.571	1.269.750	2.630.196	3.990.643	5.351.089	8.071.982
Steel RSL	[N]	525.341	1.050.682	1.751.136	3.852.500	5.778.749	7.880.113	11.907.728

F48**PRODUCT SPECIFICATIONS**

STANDARD THICKNESS	4,8 mm
WIDTH TOLERANCE	+/- 2,0 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	50 m
STANDARD COLOR	Black
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY DIAMETER**

	STEEL
PULLEY ON FLIGHT SIDE	150
IDLER ON THE BACK	225

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	

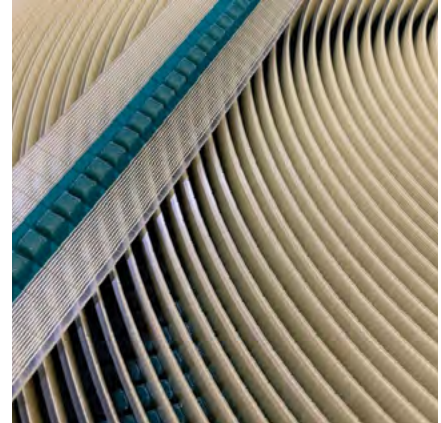
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	50	75	100	150
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	45.000	97.500	150.000	202.500	307.500
ALLOWABLE BELT FORCE / OPEN ENDED						
Steel (SL)	[N]	13.378	28.986	44.594	60.201	91.417
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Steel (SL)	[N]	N/A	N/A	N/A	N/A	N/A
BELT WEIGHT						
Steel (SL)	[kg/m]	0,27	0,54	0,81	1,08	1,62
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	2.675.622	5.797.181	8.918.740	12.040.299	18.283.417

LRB-77 LIVE ROLLER DRIVE BELT

HIGH SPEED AND DURABLE INTRALOGISTICS BELT SOLUTION

The LRB-77 is an open ended flat belt specifically designed for the Honeywell Intelligrated system. The top side of the belt is flat for interaction with the conveyor rollers, while the bottom side has a notched v-guide for self-tracking. Aramid cords provide tensile strength while still allowing for high flexibility.



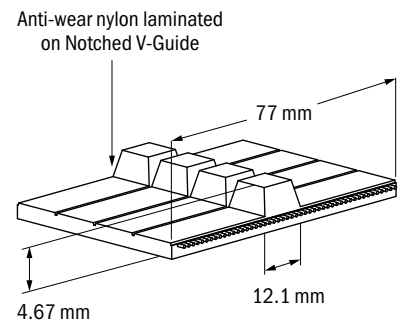
LRB-77 (SECTION)

PRODUCT SPECIFICATIONS

	METRIC	IMPERIAL
STANDARD WIDTH	77 mm	3,03"
OVERALL THICKNESS	10,4 mm	0,409"
WEB THICKNESS	4 mm	0,157"
STANDARD ROLL LENGTH	500 ft	
STANDARD COLOR	Clear	
CORD	Aramid	
MINIMUM PULLEY DIAMETER	100 mm	4"
FDA/EU APPROVAL	No	
POLYURETHANE	85 Shore A	
TOP SURFACE	Smooth Polyurethane	
BOTTOM SURFACE	Antiwear Nylon Covered V-guide	
OPERATING TEMPERATURE	5°C to 70°C	23°F to 158°F
SPLICE	Interleaved Finger Heat Weld	
RECOMMEND FINGER LENGTH	76 x 9.5 mm	3" x .75"

TECHNICAL DATA

ULTIMATE TENSILE STRENGTH	24260 N	5454 lbf
ALLOWABLE BELT TENSION	3600 N	810 lbf
SPECIFIC BELT STIFFNESS	31905 N/mm	182100 lbf/in



FEATURES + BENEFITS

- OEM specified belt
- Nylon laminated v-guide for low friction self-tracking
- High flexibility due to aramid cords, notched v-guide, and 85A resin

LRB-45 LIVE ROLLER DRIVE BELT

HIGH SPEED AND DURABLE INTRALOGISTICS BELT SOLUTION

The LRB-45 belt is an open ended flat belt with a high grip top side to the live rollers and a low friction and anti-static fabric bottom side to improve safety and reliability. Aramid reinforcement ensures a safe and longer lifespan operation for our customers' warehouse and distribution conveyors.



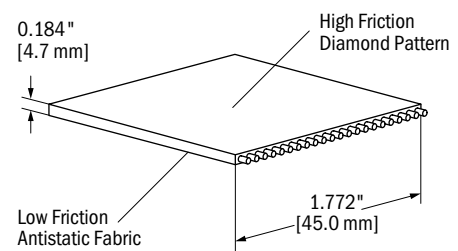
LRB-45 (SECTION)

PRODUCT SPECIFICATIONS

	METRIC	IMPERIAL
STANDARD THICKNESS	4,7 +/- 0,2 mm	0,184 +/- 0,008 in
STANDARD ROLL LENGTH*	up to 152 m	500 ft
STANDARD COLOR	Black	Black
CORD	Aramid	Aramid
MINIMUM PULLEY DIAMETER	100 mm	3.94 in
FDA/EU APPROVAL	No	No
POLYURETHANE	92° Shore A	92° Shore A
TOP SURFACE	Knurled Polyurethane	Knurled Polyurethane
BOTTOM SURFACE	Antistatic Fabric	Antistatic Fabric
OPERATING TEMPERATURE	-25°C to +80°C	-13°F to 175°F
SPLICE	Interleaved finger heat welded	Interleaved finger heat welded
RECOMMEND FINGER LENGTH	155 mm (min.)	6.1 in (min.)

TECHNICAL DATA

STANDARD WIDTH	45 +0/-1 mm	1.77 +0/-0.04 in
ULTIMATE TENSILE STRENGTH	33.300 N	7.490 lbf
ALLOWABLE BELT TENSION	4.450 N	1.000 lbf
SPECIFIC BELT WEIGHT	0,21 kg/m	1,52lb/ft
SPECIFIC BELT STIFFNESS	731.370 N	164.420 lbf



FEATURES + BENEFITS

- High friction, knurled diamond pattern on top ensures high grip and less slip on the rollers
- Low friction antistatic fabric on the bottom prevents static load buildup
- Aramid cord design for lower stretch and longer life compared to competitor belts
- Designed to be spliced with OEM equipment
- Available in roll lengths up to 660 ft (200 meters)

CLAMP CONNECTION FIX-FLAT

FIX FLAT

THE FIX-FLAT, THE FLAT BELT CLAMP, ENABLES THE SECURE CLAMPING OF ANY FLAT BELTS AT BOTH ENDS EASILY, QUICKLY AND SAFELY.

The patented Flat Belt Clamp holds all types of Flat Belts easily and safely.
The FIX-FLAT process is suitable for all Flat belt constructions.

MORE INFORMATION IS AVAILABLE ON REQUEST.

FEATURES

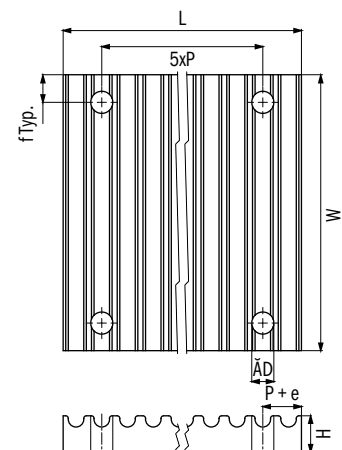
- Suitable for all types of flat belts.
- Easy
- Safe
- Fast



FIX FLAT CLAMP DIMENSIONS											
DIMENSION [MM]	L	H	D	P	E	F	W				
							Belt width 25	Belt width 50	Belt width 75	Belt width 100	Belt width 150
HTD8	66	15	9	8	5	8	50	75	100	125	175
HTD14	116	22	11	14	9	10	56	81	106	131	181

CLAMPING F30 STEEL RSL OR F48 STEEL: 2 CLAMPING PLATES ARE REQUIRED

TYPE	PITCH
F20 Steel	HTD8
F20 Aramid	HTD8
F20 Steel HF	HTD8
F20 Steel RSL	HTD8
F20 Aramid RKV	HTD8
F20 RHF	HTD8
F20 NIRO	HTD8
F30 Steel	HTD14
F30 Aramid	HTD8
F30 Aramid RKV	HTD14
F30 Steel HF	HTD14
F30 Steel RSL	HTD14
F48 Steel	HTD14



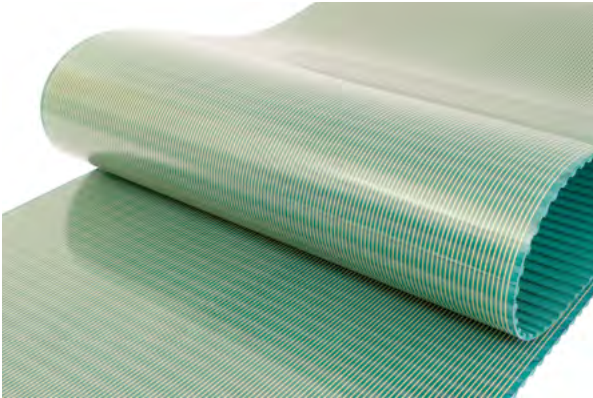


SYNCHRO-POWER WIDE

WIDE BELTS

Gates TPU Wide Belts are ideal for conveying applications that require greater than 150mm width, precise product positioning, and smooth-running operation. The high strength aramid cords ensure even tension characteristics. The high quality polyurethane is cut resistant and non-marking, making this belt ideal for abrasive environments.

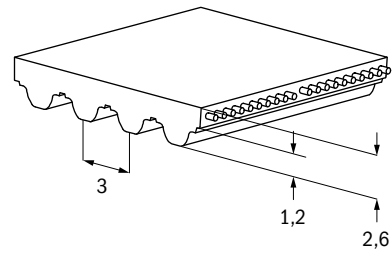
GATES TPU WIDE BELTS OFFER AN ALTERNATIVE TO PLASTIC MODULAR AND CONVEYOR BELTING WITH OUR ABRASION RESISTANT, SMOOTH DRIVE WIDE BELTS.




ATTRIBUTES	APPLICATIONS	PROCESSING OPTIONS
■ Cut resistant ■ Widths up to 450 mm available ■ Suitable for synchronous conveying applications ■ No cord exposure at the edges of the belt ■ Low-noise, smooth operation ■ FDA and EU food approval for various pitches	■ Synchronous conveying applications ■ Bulk conveying ■ Food and confectionary conveying ■ Hygienic applications	■ Backings - Further information on page 97 ■ Profiles - Further information on page 103 ■ Special processing - Further information on page 109

GMT3 / PITCH: 3MM**PRODUCT SPECIFICATIONS**

PITCH	3 mm
STANDARD THICKNESS	2,6 mm
MINIMUM WELDED BELT LENGTH	1.200 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	60 m
STANDARD COLOR	Blue, Optional White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	NA

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	ARAMID
Z MIN	19
D MIN	18
Z MIN	25
D MIN	30



POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]
R2	85	-10 to +60
FDA	85	-10 to +60

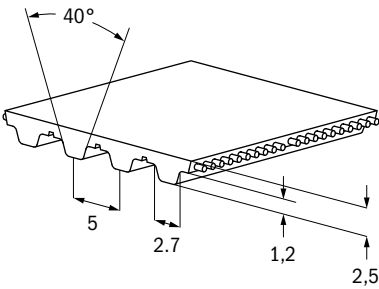
TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	50	100	150	200	250	300	350	450
BREAKING FORCE / AVERAGE VALUE									
Aramid (K)	[N]	3.363	6.851	10.338	13.826	17.313	20.801	24.288	30.018
ALLOWABLE BELT FORCE / OPEN ENDED									
Aramid (K)	[N]	498	1.014	1.530	2.046	2.561	3.077	3.593	4.441
ALLOWABLE BELT FORCE / ENDLESS WELDED									
Aramid (K)	[N]	373	760	1.147	1.534	1.921	2.308	2.695	3.331
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	1.200	2.400	3.600	4.800	6.000	7.200	8.400	10.800
BELT WEIGHT									
Aramid (K)	[kg/m]	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,9
SPECIFIC BELT STIFFNESS									
Aramid (K)	[N]	124.389	253.385	382.381	511.377	640.373	769.369	898.365	1.110.287

WT5 / PITCH: 5MM

PRODUCT SPECIFICATIONS

PITCH	5 mm
STANDARD THICKNESS	2,5 mm
MINIMUM WELDED BELT LENGTH	810 mm
STANDARD ROLL LENGTH	100 m
STANDARD COLOR	White, Optional Clear
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB



MIN PULLEY TOOTH COUNT AND DIAMETER

		ARAMID
Z _{min}		10
d _{min}		16
Z _{min}		15
d _{min}		30

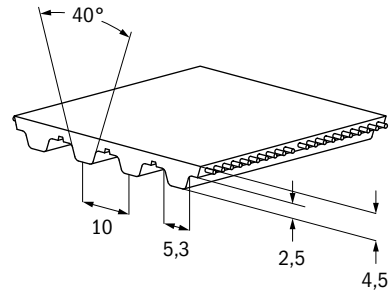
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	150	200
BREAKING FORCE / AVERAGE VALUE			
Aramid (K)	[N]	22.161	29.637
ALLOWABLE BELT FORCE / OPEN ENDED			
Aramid (K)	[N]	2.814	3.764
ALLOWABLE BELT FORCE / ENDLESS WELDED			
Aramid (K)	[N]	2.111	2.823
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH			
	[N]	3.750	5.000
BELT WEIGHT			
Aramid (K)	[kg/m]	0,3	0,4
SPECIFIC BELT STIFFNESS			
Aramid (K)	[N]	703.579	940.931

WT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	4,5 mm
MINIMUM WELDED BELT LENGTH	1.100 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	60 m
STANDARD COLOR	Clear
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	ARAMID
	Z MIN 14
	D MIN 45
	Z MIN 20
	D MIN 60

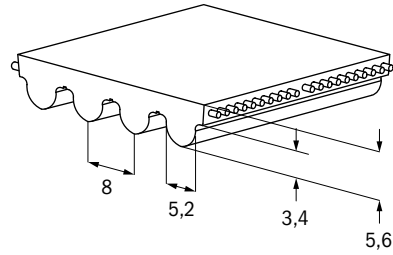
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	150	200	250	300	450
BREAKING FORCE / AVERAGE VALUE						
Aramid (K)	[N]	25.333	33.957	42.581	51.205	77.077
ALLOWABLE BELT FORCE / OPEN ENDED						
Aramid (K)	[N]	6.750	9.048	11.346	13.644	20.537
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Aramid (K)	[N]	3.375	4.524	5.673	6.822	10.269
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	8.535	11.380	14.225	17.070	25.605
BELT WEIGHT						
Aramid (K)	[kg/m]	0,6	0,8	1,0	1,2	1,8
SPECIFIC BELT STIFFNESS						
Aramid (K)	[N]	843.744	1.130.976	1.418.208	1.705.440	2.567.136

WHTD8M / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	5,6 mm
MINIMUM WELDED BELT LENGTH	952 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	60 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		ARAMID
Z_{min}		18
d_{min}		46
Z_{min}		20
d_{min}		120

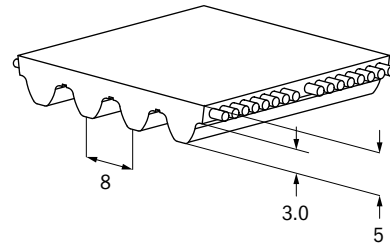
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	150	200	250	300	450
BREAKING FORCE / AVERAGE VALUE						
Aramid (K)	[N]	50.713	67.977	85.241	102.505	154.297
ALLOWABLE BELT FORCE / OPEN ENDED						
Aramid (K)	[N]	8.225	11.025	13.825	16.625	25.025
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Aramid (K)	[N]	4.113	5.513	6.913	8.313	12.513
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	13.950	18.600	23.250	27.900	41.850
BELT WEIGHT						
Aramid (K)	[kg/m]	0,4	0,5	0,6	0,7	1,1
SPECIFIC BELT STIFFNESS						
Aramid (K)	[N]	1.370.833	1.837.500	2.304.167	2.770.831	4.170.834

WSTD8 / PITCH: 8MM**PRODUCT DATA**

PITCH	8 mm
STANDARD THICKNESS	5.0mm
MINIMUM WELDED BELT LENGTH	952 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	60 m
STANDARD COLOR	White
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		ARAMID
	Z MIN	14
	D MIN	45
	Z MIN	20
	D MIN	60

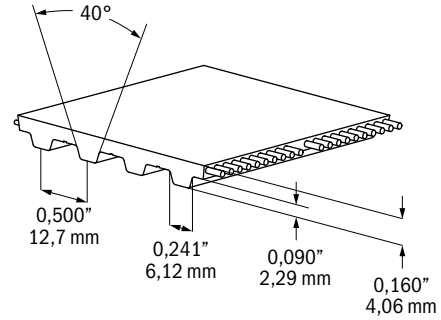
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	TEMPERATURE RANGE [°F]	FEATURE
R1	92	-5 to +70	+23 to +158	Standard
R2	85	-10 to +60	+14 to +140	
FDA	85	-10 to +60	+14 to +140	

TECHNICAL DATA

STANDARD WIDTH [MM]	UNIT	150	200	250	300	450
BREAKING FORCE / AVERAGE VALUE						
Aramid (K)	[N]	50.713	67.977	85.241	102.505	154.297
ALLOWABLE BELT FORCE / OPEN ENDED						
Aramid (K)	[N]	8.225	11.025	13.825	16.625	25.025
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Aramid (K)	[N]	4.113	5.513	6.913	8.313	12.513
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	13.950	18.600	23.250	27.900	41.850
BELT WEIGHT						
Aramid (K)	[kg/m]	0,4	0,5	0,6	0,7	1,1
SPECIFIC BELT STIFFNESS						
Aramid (K)	[N]	1.370.833	1.837.500	2.304.167	2.770.831	4.170.834

WH / PITCH: 0,500" / 12,7MM**PRODUCT SPECIFICATIONS**

PITCH	0,500" / 12,7 mm
STANDARD THICKNESS	0,160" / 4,06 mm
MINIMUM WELDED BELT LENGTH	43,5" / 1104,9 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	200 feet / 61 m
STANDARD COLOR	Clear
FDA/EU APPROVAL	Optional
POLYAMIDE FABRIC	Optional NT, NB & NTB

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		ARAMID
Z_{min}	d_{min}	Z MIN 14
		D MIN 2,23" / 57 mm
Z_{min}	d_{min}	Z MIN 20
		D MIN 3,15" / 80 mm

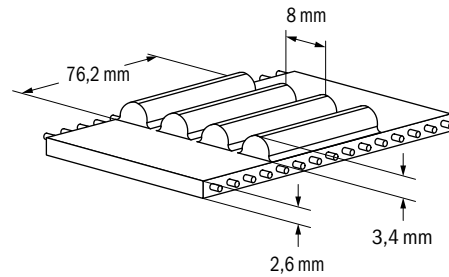
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R1	92	-5 to +70	Standard
R2	85	-10 to +60	
FDA	85	-10 to +60	

TECHNICAL DATA

STANDARD WIDTH ("/MM)	UNIT	6"/152,4MM	8"/203,2MM	10"/254MM	12"/304,8MM	14"/355,6MM	18"/457,2MM
BREAKING FORCE / AVERAGE VALUE							
Aramid (K)	[N]	25.333	34.496	43.120	51.744	60.368	77.077
ALLOWABLE BELT FORCE / OPEN ENDED							
Aramid (K)	[N]	6.750	9.191	11.489	13.787	16.085	20.537
ALLOWABLE BELT FORCE / ENDLESS WELDED							
Aramid (K)	[N]	3.375	4.596	5.745	6.894	8.042	10.269
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	9.900	13.200	16.500	19.800	23.100	29.700
BELT WEIGHT							
Aramid (K)	[kg/m]	0,5	0,7	0,8	1,0	1,1	1,4
SPECIFIC BELT STIFFNESS							
Aramid (K)	[N]	843.744	1.148.928	1.436.160	1.723.392	2.010.624	2.567.136

CC8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
STANDARD THICKNESS	6 mm
MINIMUM WELDED BELT LENGTH	1004 mm
STANDARD ROLL LENGTH (TOLERANCE ±1%)	61 m
STANDARD COLOR	PosiBlue
FDA/EU APPROVAL	FDA Only
POLYAMIDE FABRIC	NA



CC8 RUNS IN HTD8 PULLEYS

MIN PULLEY TOOTH COUNT AND DIAMETER

	ARAMID
	Z MIN 20
	D MIN 51
	Z MIN 22
	D MIN 110

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
FG	90	-5 to +70	Standard

TECHNICAL DATA

STANDARD WIDTH [MM]	UNIT	150	200	250	300	450
BREAKING FORCE / AVERAGE VALUE						
Aramid (K)	[N]	11.858	14.014	16.170	18.326	24.794
ALLOWABLE BELT FORCE / OPEN ENDED						
Aramid (K)	[N]	2.370	2.801	3.231	3.662	4.995
ALLOWABLE BELT FORCE / ENDLESS WELDED						
Aramid (K)	[N]	1.185	1.400	1.616	1.831	2.477
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	6.975	6.975	6.975	6.975	6.975
BELT WEIGHT						
Aramid (K)	[kg/m]	0,7	0,8	1,0	1,2	1,5
SPECIFIC BELT STIFFNESS						
Aramid (K)	[N]	394.944	466.752	538.560	610.368	825.792



SYNCHRO-POWER SLEEVE

SLEEVE BELTS

Gates TPU Synchro-Power Sleeve Belts are designed to meet the higher strength and stiffness requirements that certain power transmission and high-performance positioning applications demand.

Our Synchro-Power Sleeves belts are cast on fixed molds and have continuously wound steel cords that provide more strength and stiffness than a welded belt can provide. They are manufactured in various exact sizes, constructions, and pitches to fulfill customer requirements.

CAST ENDLESS BELTS OFFER PREMIUM CAPACITY FOR POWER TRANSMISSIONS AND ROTARY POSITIONING APPLICATIONS WHILE MEETING A BROAD RANGE OF LOADS, SPEEDS, AND APPLICATION REQUIREMENTS.



ATTRIBUTES

- High quality thermo-set polyurethane construction
- Helically wound steel cords for high strength, truly endless power transmission capabilities.
- Excellent abrasion resistance
- Smooth, low noise, non-marking operation
- High tooth strength reduces deforming under load
- Excellent resistance to chemicals

APPLICATIONS

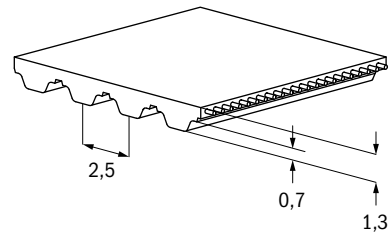
- Paper processing industry
- Wood processing industry
- Glass processing industry
- Textile industry
- Packaging machines
- Exercise equipment

PROCESSING OPTIONS


- Backings - Further information on page 97
- Special processing - Further information on page 109

T2,5 / PITCH: 2,5MM**PRODUCT SPECIFICATIONS**

PITCH	2,5 mm
STANDARD THICKNESS	1,3 mm
STANDARD POLYURETHANE R3	84° Shore A
STANDARD COLOR	Blue
FDA/EU APPROVAL	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID
Z MIN	10	10
D MIN	7,96	7,96
Z MIN	10	10
D MIN	15	15

**TECHNICAL DATA**

STANDARD WIDTH (MM)	UNIT	4	6	8	10	12	16	20	25	32	50
BREAKING FORCE / AVERAGE VALUE											
Steel (SL)	[N]	340	540	740	1.000	1.200	1.680	2.080	2.680	3.400	5.400
Aramid (K)	[N]	500	800	1.095	1.500	1.800	2.500	3.100	4.000	5.100	8.100
ALLOWABLE BELT FORCE											
Steel (SL)	[N]	85	135	180	250	300	420	520	670	850	1.350
Aramid (K)	[N]	100	160	220	300	360	500	620	800	1.020	1.620
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH											
	[N]	32	48	64	80	96	128	160	200	256	400
BELT WEIGHT											
Steel (SL)	[kg/m]	0,01	0,01	0,01	0,01	0,01	0,02	0,03	0,03	0,04	0,07
Aramid (K)	[kg/m]	0,01	0,01	0,01	0,01	0,01	0,02	0,02	0,02	0,03	0,05


T2,5 / PITCH: 2,5MM

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
120	200	48
145	200	58
160	200	64
177.5	200	71
180	200	72
200	200	80
210	200	84
230	200	92
245	200	98
265	200	106
277.5	200	111
285	200	114
290	200	116
305	200	122

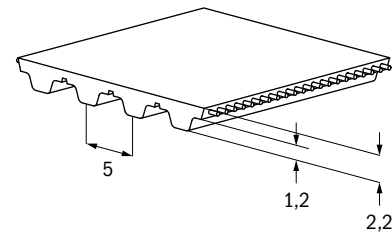
LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
317.5	200	127
330	380	132
342.5	380	137
380	380	152
420	380	168
480	380	192
500	380	200
540	380	216
600	380	240
620	380	248
650	380	260
780	380	312
915	380	366
950	380	380

T5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

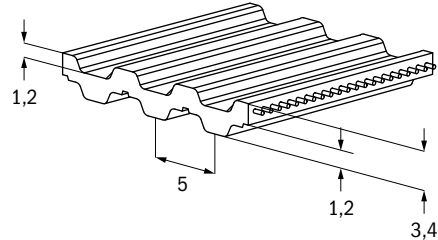
PITCH	5 mm
STANDARD THICKNESS	2,2 mm
STANDARD THICKNESS DL	3,4 mm
STANDARD POLYURETHANE R3	84° Shore A
STANDARD COLOR	Blue
FDA/EU APPROVAL	No

MIN PULLEY TOOTH COUNT AND DIAMETER

	STEEL
Z MIN	10
D MIN	15,92
Z MIN	10
D MIN	30



T5 Tooth Form



T5-DL Tooth Form

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	4	6	8	10	12	16	20	25	32	50	75
BREAKING FORCE / AVERAGE VALUE												
Steel (SL)	[N]	570	880	1.180	1.500	1.880	2.640	3.360	4.240	5.500	8.600	13.200
Aramid (K)	[N]	820	1.250	1.685	2.150	2.700	3.750	4.850	6.100	7.900	12.400	18.900
ALLOWABLE BELT FORCE												
Steel (SL)	[N]	135	220	295	375	470	660	840	1.060	1.375	2.150	3.300
Aramid (K)	[N]	155	250	330	430	540	750	970	1.220	1.580	2.480	3.780
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH												
	[N]	100	150	200	250	300	400	500	625	800	1.250	1.875
BELT WEIGHT												
Steel (SL)	[kg/m]	0,01	0,01	0,02	0,02	0,02	0,03	0,04	0,05	0,07	0,11	0,16
Aramid (K)	[kg/m]	0,01	0,01	0,01	0,02	0,02	0,02	0,03	0,04	0,05	0,08	0,12
Steel DL	[kg/m]	0,01	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,13	0,19
Aramid DL	[kg/m]	0,01	0,01	0,02	0,02	0,02	0,03	0,04	0,05	0,06	0,10	0,15

T5

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
165	200	33
185	200	37
200	200	40
215	200	43
220	200	44
225	200	45
245	200	49
250	200	50
255	200	51
260	200	52
270	200	54
275	200	55
280	200	56
295	200	59
300	200	60
305	200	61
320	200	64
325	380	65
330	380	66
340	380	68
350	380	70
355	380	71
365	380	73
375	380	75
390	380	78
400	380	80
410	380	82
420	380	84
425	380	85
430	380	86
440	380	88
445	380	89
450	380	90
455	380	91
460	380	92
475	380	95
480	380	96
500	380	100


LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
510	380	102
525	380	105
545	380	109
550	380	110
560	380	112
575	380	115
590	380	118
600	380	120
610	380	122
620	380	124
625	380	125
630	380	126
640	380	128
650	380	130
660	380	132
675	380	135
690	380	138
700	380	140
720	380	144
725	380	145
750	380	150
780	380	156
800	380	160
815	380	163
840	380	168
850	380	170
900	380	180
940	380	188
990	380	198
1000	380	200
1075	380	215
1100	380	220
1215	380	243
1315	380	263
1350	380	270
1380	380	276
1440	380	288

DL T5

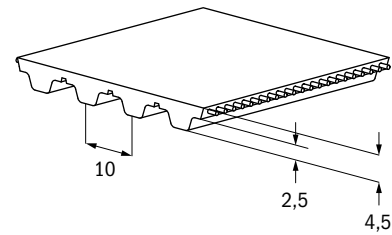
LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
300	200	60
400	380	80
410	380	82
450	380	90
460	380	92
480	380	96
500	380	100
515	380	103
550	380	110
590	380	118
600	380	120
620	380	124
650	380	130
700	380	140
750	380	150
815	380	163
900	380	180
940	380	188
1100	380	220

T10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

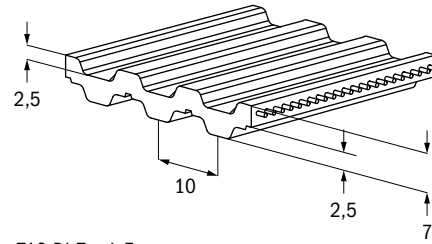
PITCH	10 mm
STANDARD THICKNESS	4,5 mm
STANDARD THICKNESS DL	7,0 mm
STANDARD POLYURETHANE R3	84° Shore A
STANDARD COLOR	Blue
FDA/EU APPROVAL	No

MIN PULLEY TOOTH COUNT AND DIAMETER

	STEEL	ARAMID
Z MIN	12	12
D MIN	38,2	38,2
Z MIN	12	12
D MIN	60	60



T10 Tooth Form



T10-DL Tooth Form

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	10	12	16	20	25	32	50	75
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	3.360	4.200	5.900	7.600	9.700	12.600	20.200	30.700
Aramid (K)	[N]	4.000	5.000	7.000	9.000	11.500	15.000	24.000	36.500
ALLOWABLE BELT FORCE									
Steel (SL)	[N]	840	1.050	1.475	1.900	2.425	3.150	5.050	7.675
Aramid (K)	[N]	800	1.000	1.400	1.800	2.300	3.000	4.800	7.300
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	569	683	911	1.138	1.423	1.821	2.846	4.269
BELT WEIGHT									
Steel (SL)	[kg/m]	0,04	0,05	0,07	0,09	0,11	0,14	0,23	0,34
Aramid (K)	[kg/m]	0,03	0,04	0,05	0,06	0,08	0,10	0,16	0,24
Steel DL	[kg/m]	0,06	0,07	0,09	0,11	0,14	0,18	0,29	0,44
Aramid DL	[kg/m]	0,04	0,05	0,07	0,09	0,11	0,14	0,23	0,34

T10

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
260	200	26
320	200	32
370	380	37
400	380	40
410	380	41
440	380	44
450	380	45
500	380	50
530	380	53
550	380	55
560	380	56
600	380	60
610	380	61
630	380	63
650	380	65
660	380	66
690	380	69
700	380	70
720	380	72
750	380	75
780	380	78
800	380	80
810	380	81
840	380	84
850	380	85
880	380	88
890	380	89
900	380	90
910	380	91
920	380	92
950	380	95
960	380	96
970	380	97

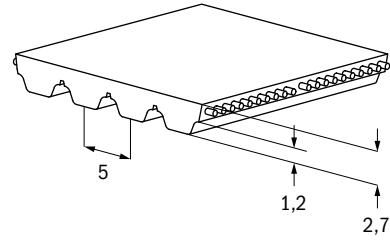
LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
980	380	98
1000	380	100
1010	380	101
1050	380	105
1080	380	108
1100	380	110
1110	380	111
1140	380	114
1150	380	115
1200	380	120
1210	380	121
1240	380	124
1250	380	125
1300	380	130
1320	380	132
1350	380	135
1390	380	139
1400	380	140
1420	380	142
1440	380	144
1450	380	145
1460	380	146
1500	380	150
1560	380	156
1600	200	160
1610	200	161
1700	200	170
1750	200	175
1780	200	178
1800	200	180
1880	200	188
1960	200	196
2250	200	225

DL T10


LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
600	380	60
630	380	63
660	380	66
700	380	70
750	380	75
800	380	80
840	380	84
900	380	90
980	380	98
1000	380	100
1100	380	110
1200	380	120
1210	380	121
1300	380	130
1320	380	132
1420	380	142
1600	200	160
1610	200	161
1700	200	170
1880	200	188

AT5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
STANDARD THICKNESS	2,7 mm
STANDARD POLYURETHANE R3	84° Shore A
STANDARD COLOR	Blue
FDA/EU APPROVAL	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL
Z MIN	15
D MIN	23,87
Z MIN	15
D MIN	50

**TECHNICAL DATA**

STANDARD WIDTH (MM)	UNIT	4	6	8	10	12	16	20	25	32	50	75
BREAKING FORCE / AVERAGE VALUE												
Steel (SL)	[N]	723	1.420	2.065	2.860	3.700	5.100	6.560	8.300	10.800	17.100	26.400
Aramid (K)	[N]	823	1.250	1.690	2.150	2.700	3.775	4.850	6.100	7.900	12.400	18.900
ALLOWABLE BELT FORCE												
Steel (SL)	[N]	181	355	516	715	925	1.275	1.640	2.075	2.700	4.275	6.550
Aramid (K)	[N]	157	250	334	430	540	755	970	1.220	1.580	2.480	3.780
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH												
	[N]	160	240	320	400	480	640	800	1.000	1.280	2.000	3.000
BELT WEIGHT												
Steel (SL)	[kg/m]	0,01	0,02	0,02	0,03	0,04	0,05	0,06	0,08	0,10	0,17	0,25
Aramid (K)	[kg/m]	0,01	0,01	0,02	0,02	0,02	0,03	0,04	0,06	0,07	0,12	0,18

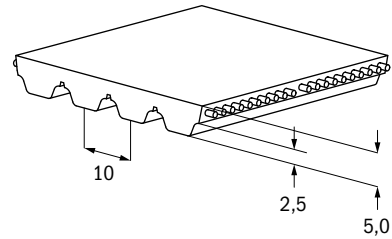
AT5 / PITCH: 5MM

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
225	200	45
280	200	56
300	200	60
340	380	68
375	380	75
390	380	78
420	380	84
450	380	90
455	380	91
500	380	100
545	380	109
600	380	120


LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
610	380	122
660	380	132
710	380	142
720	380	144
750	380	150
780	380	156
825	380	165
860	380	172
975	380	195
1050	380	210
1500	380	300

AT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
STANDARD THICKNESS	5,0 mm
STANDARD POLYURETHANE R3	84° Shore A
STANDARD COLOR	Blue
FDA/EU APPROVAL	No

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	ARAMID
Z MIN	15	15
D MIN	47,75	47,75
Z MIN	15	15
D MIN	120	120

**TECHNICAL DATA**

STANDARD WIDTH (MM)	UNIT	10	12	16	20	25	32	50	75
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	4.760	5.700	8.560	10.500	14.300	18.100	29.500	45.600
Aramid (K)	[N]	5.500	6.600	9.900	12.100	16.500	20.900	34.100	52.800
ALLOWABLE BELT FORCE									
Steel (SL)	[N]	1.190	1.425	2.140	2.625	3.575	4.525	7.375	11.450
Aramid (K)	[N]	1.100	1.320	1.980	2.420	3.300	4.180	6.820	10.560
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	890	1.068	1.424	1.780	2.225	2.848	4.450	6.675
BELT WEIGHT									
Steel (SL)	[kg/m]	0,07	0,08	0,10	0,13	0,16	0,21	0,33	0,49
Aramid (K)	[kg/m]	0,04	0,05	0,07	0,09	0,11	0,14	0,22	0,33

AT10 / PITCH: 10MM

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
500	380	50
560	380	56
610	380	61
660	380	66
700	380	70
730	380	73
780	380	78
800	380	80
840	380	84
890	380	89
920	380	92
960	380	96

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
980	380	98
1.010	380	101
1.050	380	105
1.080	380	108
1.100	380	110
1.150	380	115
1.200	380	120
1.210	380	121
1.250	380	125
1.280	380	128
1.320	380	132
1.350	380	135

LENGTH [MM]	WIDTH [MM]	NUMBER OF TEETH
1.360	380	136
1.400	380	140
1.420	380	142
1.480	380	148
1.500	380	150
1.600	200	160
1.700	200	170
1.800	200	180
1.860	200	186
1.940	200	194



SYNCHRO-POWER FLEX

FLEX BELTS

Gates TPU Synchro-Power Flex Belts are designed for high power transmission drives and heavy load conveying applications.

Our flex belts are available in both standard and low-temperature urethanes to suit a range of application environments. Enhanced with our full range of backing and profile options, we are able to create customized conveying and positioning solutions.

FLEX BELTS ARE TRULY ENDLESS EXTRUDED BELTS PRODUCED WITH HELICALLY WOUND STEEL CORDS AND ABRASION-RESISTANT POLYURETHANE, A CONSTRUCTION THAT PROVIDES LONG LASTING BELT SYSTEM SOLUTIONS FOR EVEN THE MOST DEMANDING INDUSTRIES AND APPLICATIONS.



ATTRIBUTES

- Extruded, thermoplastic polyurethane construction
- High performance and power transmission based on truly endless cords
- Synchronous tracking

APPLICATIONS

- Glass & Ceramics
- Packaging
- Intralogistics
- Wood, Paper & Furniture
- Textile industry
- Machine tools
- Power transmission
- High load conveying applications

PROCESSING OPTIONS


- Backings - Further information on page 97
- Profiles - Further information on page 103
- Special processing - Further information on page 109

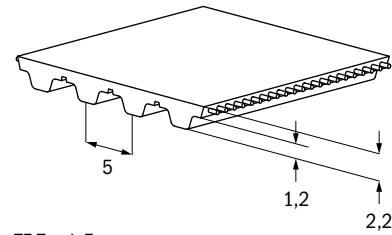
Further constructions are available on request.

T5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

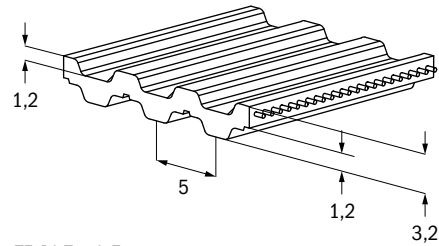
PITCH	5 mm
SLEEVE WIDTH	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,5 mm
> 50MM WIDTH	+0,75 mm
LENGTH RANGE	1.520 - 12.000 mm
MIN LENGTH OF BELT WITH NT	1750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT

MIN PULLEY TOOTH COUNT AND DIAMETER
 50MM AT TEMPERATURES BELOW -5°

		STEEL
	Z MIN	10
	D MIN	16
	Z MIN	15
	D MIN	30



T5 Tooth Form



T5-DL Tooth Form


POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

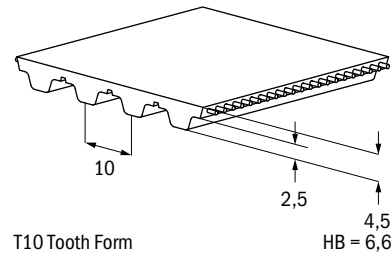
STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	1.250	2.000	3.375	4.250	6.875	10.375	13.875
ALLOWABLE BELT FORCE								
Steel (SL)	[N]	311	498	840	1.058	1.711	2.582	3.453
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	250	400	625	800	1.250	1.875	2.500
BELT WEIGHT								
Standard	[kg/m]	0,02	0,04	0,06	0,06	0,11	0,17	0,22
DL	[kg/m]	0,03	0,04	0,07	0,09	0,14	0,21	0,28
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	77.778	124.444	210.000	264.444	427.778	645.556	863.333

T10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

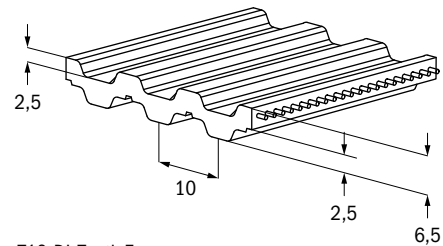
PITCH	10 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,50 mm
> 50MM WIDTH	+,-0,75 mm
LENGTH RANGE	
T10 STEEL	1.520 - 22.900 mm
T10 NIRO	1.520 - 12.000 mm
T10 ARAMID	1.600 - 12.000 mm
MIN LENGTH OF BELT WITH NT	1.750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

MIN PULLEY TOOTH COUNT AND DIAMETER
 50MM AT TEMPERATURES BELOW -5°


	STEEL/ARAMID	STEEL HF	STAINLESS STEEL (NIRO)	DL STEEL	DL STEEL HF	DL STAINLESS
Z MIN	14	12	18	20	18	18
D MIN	45	38	57	64	57	57
Z MIN	20	15	25	20	18	25
D MIN	60	50	70	64	57	70



T10 Tooth Form



T10-DL Tooth Form

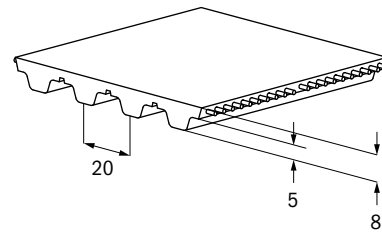
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	FDA with Aramid and NIRO cord only Low Temperature
R23F	90	-5 to +70	
R23T	90	-30 to +50	

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	16	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	4.200	7.140	9.240	14.700	22.260	29.820	44.940
Aramid (K)	[N]	5.390	9.163	11.858	18.865	28.567	38.269	57.673
Steel HF (HF)	[N]	6.200	10.540	13.640	21.700	32.860	44.020	66.340
Stainless Steel (NIRO)	[N]	3.400	5.780	7.480	11.900	18.020	24.140	36.380
ALLOWABLE BELT FORCE								
Steel (SL)	[N]	1.123	1.909	2.470	3.929	5.950	7.971	12.012
Aramid (K)	[N]	704	1.196	1.548	2.463	3.730	4.997	7.531
Steel HF (HF)	[N]	1.376	2.340	3.028	4.818	7.295	9.773	14.728
Stainless Steel (NIRO)	[N]	1.048	1.782	2.306	3.669	5.556	7.442	11.216
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	910	1.423	1.821	2.845	4.268	5.690	8.535
BELT WEIGHT								
Steel (SL)	[kg/m]	0,07	0,11	0,14	0,22	0,33	0,44	0,66
Aramid (K)	[kg/m]	0,06	0,09	0,12	0,18	0,27	0,36	0,54
Steel HF (HF)	[kg/m]	0,08	0,12	0,15	0,24	0,35	0,47	0,71
Stainless Steel (NIRO)	[kg/m]	0,07	0,11	0,14	0,22	0,34	0,45	0,67
DL Steel	[kg/m]	0,08	0,13	0,17	0,27	0,40	0,54	0,81
DL Aramid	[kg/m]	0,07	0,11	0,15	0,23	0,34	0,46	0,69
DL Steel HF	[kg/m]	0,09	0,14	0,18	0,28	0,43	0,57	0,85
DL NIRO	[kg/m]	0,08	0,13	0,17	0,27	0,40	0,54	0,81
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	280.662	477.125	617.456	982.316	1.487.507	1.992.699	3.003.081
Aramid (K)	[N]	175.946	299.109	387.082	615.813	932.516	1.249.220	1.882.627
Steel HF (HF)	[N]	344.118	585.000	757.059	1.204.412	1.823.824	2.443.235	3.682.059
Stainless Steel (NIRO)	[N]	262.059	445.500	576.529	917.206	1.388.912	1.860.618	2.804.029

T20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	+/-1,0 mm
LENGTH RANGE	1.520 - 22.900 mm
MIN LENGTH OF BELT WITH NT	1.760 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

		STEEL	STEEL HF	STAINLESS STEEL (NIRO)
	Z MIN	15	12	20
	D MIN	95	76	127
	Z MIN	25	22	30
	D MIN	120	100	160


POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

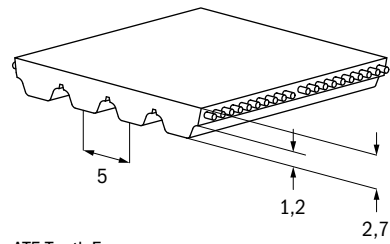
STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	16.150	20.900	33.250	50.350	67.450	101.65
Steel HF (HF)	[N]	14.705	19.030	30.275	45.845	61.415	92.555
Stainless Steel (NIRO)	[N]	12.113	15.675	24.938	37.763	50.588	76.238
ALLOWABLE BELT FORCE							
Steel (SL)	[N]	3.662	4.739	7.539	11.416	15.293	23.047
Steel HF (HF)	[N]	3.383	4.378	6.964	10.546	14.128	21.291
Stainless Steel (NIRO)	[N]	3.156	4.085	6.499	9.841	13.183	19.867
Allowable Effective Force / Minimum 12 Teeth in mesh							
	[N]	3.075	3.936	6.150	9.225	12.300	18.450
BELT WEIGHT							
Steel (SL)	[kg/m]	0,19	0,24	0,38	0,56	0,75	1,13
Steel HF (HF)	[kg/m]	0,18	0,23	0,36	0,54	0,72	1,08
Stainless Steel (NIRO)	[kg/m]	0,19	0,24	0,37	0,56	0,74	1,11
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	915.411	1.184.650	1.884.670	2.853.930	3.823.189	5.761.707
Steel HF (HF)	[N]	845.673	1.094.400	1.741.091	2.636.509	3.531.927	5.322.764
Stainless Steel (NIRO)	[N]	789.118	1.021.211	1.624.654	2.460.191	3.295.727	4.966.800

AT5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

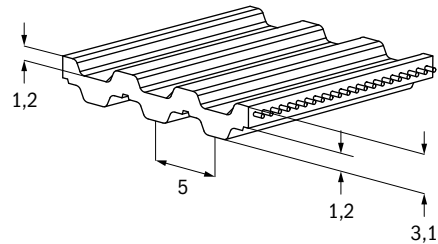
PITCH	5 mm
SLEEVE WIDTH	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+,-0,50 mm
> 50MM WIDTH	+,-0,75 mm
LENGTH RANGE	
AT5 STEEL	1.520 - 15.000 mm
AT5 STEEL HF	1.520 - 12.000 mm
MIN LENGTH OF BELT WITH NT	1.750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT

MIN PULLEY TOOTH COUNT AND DIAMETER
 50MM AT TEMPERATURES BELOW -5°


	STEEL	STEEL HF
Z MIN	15	12
D MIN	24	19
Z MIN	20	18
D MIN	60	50



AT5 Tooth Form



AT5-DL Tooth Form

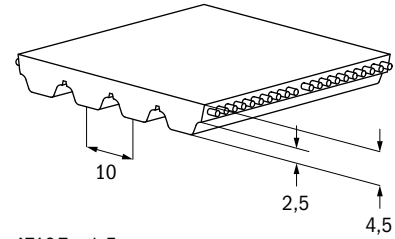
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

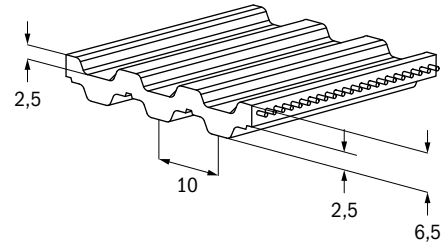
STANDARD WIDTH (MM)	UNIT	10	16	25	32	50	75	100
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	2.565	4.275	7.125	9.120	14.535	21.945	29.355
Steel HF (HF)	[N]	2.640	4.400	7.480	9.680	15.400	23.320	31.240
ALLOWABLE BELT FORCE								
Steel (SL)	[N]	634	1.056	1.761	2.253	3.591	5.422	7.253
Steel HF (HF)	[N]	384	640	1.087	1.407	2.238	3.389	4.540
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	480	768	1.200	1.536	2.400	3.600	4.800
BELT WEIGHT								
Steel (SL)	[kg/m]	0,03	0,05	0,08	0,11	0,17	0,25	0,33
Steel HF (HF)	[kg/m]	0,03	0,05	0,08	0,11	0,17	0,25	0,33
DL Steel	[kg/m]	0,04	0,06	0,09	0,12	0,19	0,28	0,37
DL Steel HF	[kg/m]	0,04	0,06	0,09	0,12	0,19	0,28	0,37
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	158.445	264.075	440.125	563.360	897.855	1.355.585	1.813.315
Steel HF (HF)	[N]	95.925	159.875	271.788	351.725	559.563	847.338	1.135.113

AT10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**


PITCH	10 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,75 mm
> 50MM WIDTH	+1,0 mm
LENGTH RANGE	1.520 - 22.900 mm
MIN LENGTH OF BELT WITH NT	1.750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT



AT10 Tooth Form



AT10-DL Tooth Form

MIN PULLEY TOOTH COUNT AND DIAMETER
50MM AT TEMPERATURES BELOW -5°

	STEEL	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	15	12	25
D MIN	48	38	80
Z MIN	25	20	40
D MIN	120	100	150

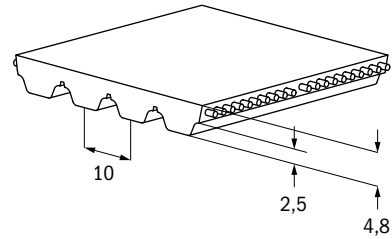
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	16.150	20.900	33.250	50.350	67.450	101.65
Steel HF (HF)	[N]	14.705	19.030	30.275	45.845	61.415	92.555
Stainless Steel (NIRO)	[N]	12.113	15.675	24.938	37.763	50.588	76.238
ALLOWABLE BELT FORCE							
Steel (SL)	[N]	4.209	5.446	8.665	13.121	17.577	26.490
Steel HF (HF)	[N]	3.888	5.032	8.005	12.121	16.238	24.472
Stainless Steel (NIRO)	[N]	3.156	4.085	6.499	9.841	13.183	19.867
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	2.580	3.302	5.160	7.740	10.320	15.480
BELT WEIGHT							
Steel (SL)	[kg/m]	0,14	0,18	0,29	0,43	0,57	0,86
Steel HF (HF)	[kg/m]	0,14	0,18	0,28	0,41	0,55	0,83
Stainless Steel (NIRO)	[kg/m]	0,14	0,18	0,29	0,43	0,57	0,86
DL Steel	[kg/m]	0,19	0,24	0,37	0,56	0,75	1,13
DL Steel HF	[kg/m]	0,18	0,23	0,36	0,54	0,72	1,09
DL NIRO	[kg/m]	0,19	0,24	0,37	0,56	0,75	1,12
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.052.156	1.361.614	2.166.204	3.280.252	4.394.300	6.622.395
Steel HF (HF)	[N]	972.000	1.257.882	2.001.176	3.030.353	4.059.529	6.117.882
Stainless Steel (NIRO)	[N]	789.118	1.021.211	1.624.654	2.460.191	3.295.727	4.966.800

ATL10 / PITCH: 10MM**PRODUCT SPECIFICATIONS**

PITCH	10 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-1,0 mm
> 50MM WIDTH	+/-1,5 mm
LENGTH RANGE	1.520 - 22.900
MIN LENGTH OF BELT WITH NT	1.750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	STAINLESS STEEL (NIRO)
Z _{min} d _{min}	25	32
Z _{min} d _{min}	80	100
Z _{min} d _{min}	30	40
Z _{min} d _{min}	150	160

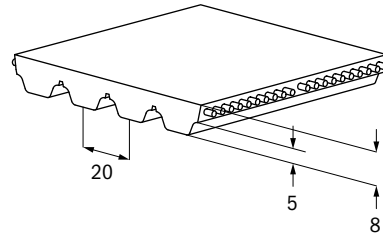
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	19.030	24.220	39.790	60.550	81.310	122.830
Stainless Steel (NIRO)	[N]	16.170	20.580	33.810	51.540	69.090	104.370
ALLOWABLE BELT FORCE							
Steel (SL)	[N]	4.604	5.860	9.627	14.650	19.673	29.719
Stainless Steel (NIRO)	[N]	3.525	4.486	7.370	11.215	15.061	22.751
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	2.580	3.302	5.160	7.740	10.320	15.480
BELT WEIGHT							
Steel/Steel NIRO	[kg/m]	0,17	0,21	0,34	0,50	0,67	1,01
DL Steel/ DL Steel NIRO	[kg/m]	0,21	0,19	0,30	0,45	0,61	0,87
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.151.071	1.465.000	2.406.786	3.662.500	4.918.214	7.429.643
Stainless Steel (NIRO)	[N]	881.203	1.121.531	1.842.515	2.803.828	3.765.140	5.687.765

AT20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-1,0 mm
> 50MM WIDTH	+/-1,5 mm
LENGTH RANGE	1.520 - 22.900 mm
MIN LENGTH OF BELT WITH NT	1.760 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	STAINLESS STEEL (NIRO)
Z _{min}	18	22
D _{min}	115	140
Z _{min}	25	30
D _{min}	180	200

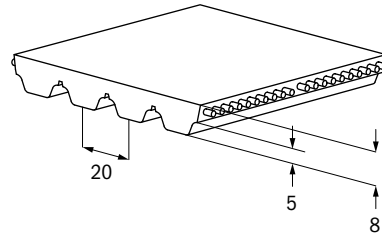
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	24.220	39.790	60.550	81.310	122.83
Stainless Steel (NIRO)	[N]	20.580	33.810	51.450	69.090	104.37
ALLOWABLE BELT FORCE						
Steel (SL)	[N]	5.860	9.627	14.650	19.673	29.719
Stainless Steel (NIRO)	[N]	4.486	7.370	11.215	15.061	22.751
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	6.976	10.900	16.350	21.800	32.700
BELT WEIGHT						
Steel/Stainless Steel (NIRO)	[kg/m]	0,31	0,49	0,73	0,97	1,46
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	1.465.000	2.406.786	3.662.500	4.918.214	7.429.643
Stainless Steel (NIRO)	[N]	1.121.531	1.842.515	2.803.828	3.765.140	5.687.765

ATL20 / PITCH: 20MM**PRODUCT SPECIFICATIONS**

PITCH	20 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	+/-2,0 mm
LENGTH RANGE	1.520 - 22.900.mm
MIN LENGTH OF BELT WITH NT	1.760 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	STAINLESS STEEL (NIRO)
Z MIN	25	26
D MIN	160	166
Z MIN	30	32
D MIN	250	260



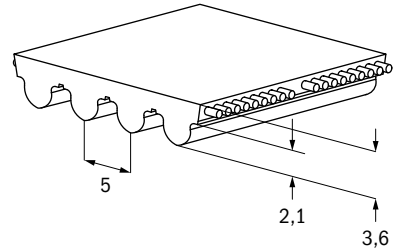
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	32	50	75	100	150
BREAKING FORCE / AVERAGE VALUE						
Steel (SL)	[N]	35.200	57.200	86.400	118.400	179.200
Stainless Steel (NIRO)	[N]	24.750	40.500	60.750	83.250	126.000
ALLOWABLE BELT FORCE						
Steel (SL)	[N]	9.160	14.901	22.351	30.629	46.357
Stainless Steel (NIRO)	[N]	6.110	9.999	14.998	20.553	31.107
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH						
	[N]	6.976	10.900	16.350	21.800	32.700
BELT WEIGHT						
Steel (SL)	[kg/m]	0,35	0,54	0,81	1,08	1,62
Stainless Steel (NIRO)	[kg/m]	0,34	0,53	0,80	1,06	1,59
SPECIFIC BELT STIFFNESS						
Steel (SL)	[N]	2.276.477	3.725.144	5.587.716	7.657.241	11.589.337
Stainless Steel (NIRO)	[N]	1.527.600	2.499.709	3.749.564	5.138.291	7.776.873

HTD5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
SLEEVE WIDTH	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
LENGTH RANGE	1.520 - 15.000 mm
MIN LENGTH OF BELT WITH NT	1.750
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT


MIN PULLEY TOOTH COUNT AND DIAMETER
 50MM AT TEMPERATURES BELOW -5°

		STEEL
Z_{min}		16
d_{min}		25
Z_{min}		20
d_{min}		80

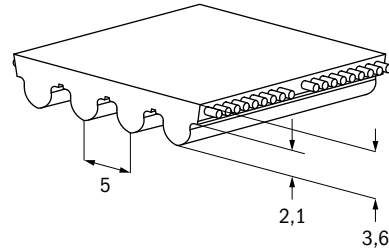
POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	50	75	100
BREAKING FORCE / AVERAGE VALUE					
Steel (SL)	[N]	7.125	14.535	21.945	29.355
ALLOWABLE BELT FORCE					
Steel (SL)	[N]	1.761	3.591	5.422	7.253
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH					
	[N]	1.125	2.250	3.375	4.500
BELT WEIGHT					
Steel (SL)	[kg/m]	0,11	0,22	0,33	0,44
SPECIFIC BELT STIFFNESS					
Steel (SL)	[N]	440.125	897.855	1.355.585	1.813.315

HTDL5 / PITCH: 5MM**PRODUCT SPECIFICATIONS**

PITCH	5 mm
SLEEVE WIDTH	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+ -0,50 mm
> 50MM WIDTH	+ -0,75 mm
LENGTH RANGE	1.520 - 12.000 mm
MIN LENGTH OF BELT WITH NT	1.750
STANDARD COLOR	White
FDA/EU APPROVAL	No
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

50MM AT TEMPERATURES BELOW -5°

		STEEL
	Z MIN	15
	D MIN	24
	Z MIN	20
	D MIN	60

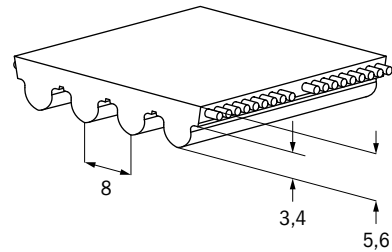
POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA


STANDARD WIDTH (MM)	UNIT	25	50	75	100
BREAKING FORCE / AVERAGE VALUE					
Steel (SL)	[N]	10.540	21.700	32.860	44.020
ALLOWABLE BELT FORCE					
Steel (SL)	[N]	2.340	4.818	7.295	9.773
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH					
	[N]	1.125	2.250	3.375	4.500
BELT WEIGHT					
Steel (SL)	[kg/m]	0,12	0,25	0,37	0,49
SPECIFIC BELT STIFFNESS					
Steel (SL)	[N]	585.000	1.204.412	1.823.824	2.443.235

HTD8 / PITCH: 8MM**PRODUCT SPECIFICATIONS**

PITCH	8 mm
SLEEVE WIDTH	
LENGTH < 12000MM	150 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,75 mm
> 50MM WIDTH	+1,0 mm
LENGTH RANGE	1.520 - 22.800 mm
MIN LENGTH OF BELT WITH NT	1.752 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT


MIN PULLEY TOOTH COUNT AND DIAMETER
 50MM AT TEMPERATURES BELOW -5°

	STEEL	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	18	16	25
D MIN	46	41	64
Z MIN	20	18	30
D MIN	120	100	150



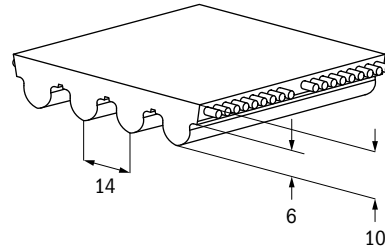

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	20	25	30	50	85	100	150
BREAKING FORCE / AVERAGE VALUE								
Steel (SL)	[N]	12.350	16.150	19.000	33.250	57.000	67.450	101.65
Steel HF (HF)	[N]	11.245	14.705	17.300	30.275	51.900	61.415	92.555
Stainless Steel (NIRO)	[N]	9.263	12.113	14.250	24.938	42.750	50.588	76.238
ALLOWABLE BELT FORCE								
Steel (SL)	[N]	3.218	4.209	4.951	8.665	14.854	17.577	26.49
Steel HF (HF)	[N]	2.379	3.110	3.659	6.404	10.978	12.990	19.577
Stainless Steel (NIRO)	[N]	2.414	3.156	3.713	6.499	11.140	13.183	19.867
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH								
	[N]	1.860	2.325	2.790	4.650	7.905	9.300	13.950
BELT WEIGHT								
Steel (SL)	[kg/m]	0,14	0,17	0,21	0,35	0,59	0,69	1,04
Steel HF (HF)	[kg/m]	0,13	0,17	0,20	0,33	0,56	0,66	0,99
Stainless Steel (NIRO)	[kg/m]	0,14	0,17	0,20	0,34	0,58	0,68	1,02
SPECIFIC BELT STIFFNESS								
Steel (SL)	[N]	804.590	1.052.156	1.237.831	2.166.204	3.713.493	4.394.300	6.622.395
Steel HF (HF)	[N]	594.635	777.600	914.824	1.600.941	2.744.471	3.247.624	4.894.306
Stainless Steel (NIRO)	[N]	603.443	789.118	928.374	1.624.654	2.785.119	3.295.725	4.966.796

HTD14 / PITCH: 14MM**PRODUCT SPECIFICATIONS**

PITCH	14 mm
SLEEVE WIDTH	
LENGTH < 12000MM	170 mm
LENGTH > 12000MM	100 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+/-1,0 mm
> 50 TO 100MM WIDTH	+/-1,5 mm
> 100MM WIDTH	+/-2,0 mm
LENGTH RANGE	1.520 - 22.900 mm
MIN LENGTH OF BELT WITH NT	1.750 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	STAINLESS STEEL (NIRO)
Z MIN	28	32
D MIN	125	142
Z MIN	36	44
D MIN	180	196

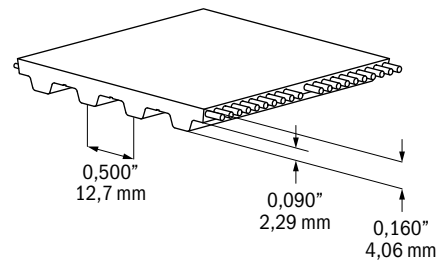

POLYURETHANE	HARDNESS [°SHORE A]	TEMPERATURE RANGE [°C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

STANDARD WIDTH (MM)	UNIT	25	40	55	85	115	170
BREAKING FORCE / AVERAGE VALUE							
Steel (SL)	[N]	19.030	31.140	43.250	67.470	93.420	138.400
Stainless Steel (NIRO)	[N]	16.170	26.460	36.750	57.330	79.380	117.600
ALLOWABLE BELT FORCE							
Steel (SL)	[N]	5.156	8.437	11.718	18.280	25.311	37.498
Stainless Steel (NIRO)	[N]	3.525	5.768	8.011	12.497	17.304	25.635
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH							
	[N]	4.313	6.900	9.488	14.663	19.838	29.325
BELT WEIGHT							
Steel / Stainless Steel (NIRO)	[kg/m]	0,27	0,43	0,59	0,92	1,24	1,84
SPECIFIC BELT STIFFNESS							
Steel (SL)	[N]	1.181.586	1.933.500	2.685.417	4.189.250	5.800.500	8.593.333
Stainless Steel (NIRO)	[N]	881.203	1.441.969	2.002.734	3.124.265	4.325.906	6.408.749

H / PITCH: 0,500"**PRODUCT SPECIFICATIONS**

PITCH	12,7 mm
SLEEVE WIDTH	
LENGTH < 12000MM	152,4 mm
LENGTH > 12000MM	101,6 mm
WIDTH TOLERANCE	
< 50MM WIDTH	+0,51 mm
> 50MM WIDTH	+0,76 mm
LENGTH RANGE	
H STEEL	1.524 - 22.900 mm
H STEEL HF AND H STAINLESS STEEL	1.600,2 - 12.000 mm
MIN LENGTH OF BELT WITH NT	1.752,6 mm
STANDARD COLOR	White
FDA/EU APPROVAL	Optional with Stainless Steel (NIRO)
POLYAMIDE FABRIC	Optional NT

**MIN PULLEY TOOTH COUNT AND DIAMETER**

	STEEL	STEEL HF	STAINLESS STEEL (NIRO)
Z MIN	14	12	18
D MIN	57	49	73
Z MIN	20	15	24
D MIN	80	60	100

POLYURETHANE	HARDNESS [° SHORE A]	TEMPERATURE RANGE [° C]	FEATURE
R23	90	-5 to +70	
R23F	90	-5 to +70	FDA with NIRO cord only
R23T	90	-30 to +50	Low Temperature

TECHNICAL DATA

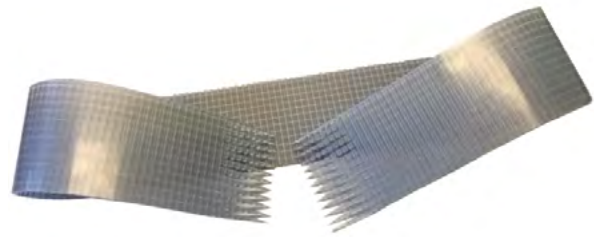
STANDARD WIDTH INCH (MM)	UNIT	0,5" (12,7MM)	0,75" (19,05MM)	1" (25,4MM)	1,5" (38,1MM)	2" (50,8MM)	3" (76,2MM)	4" (101,6MM)	6" (152,4MM)
BREAKING FORCE / AVERAGE VALUE									
Steel (SL)	[N]	3.360	5.040	7.140	10.920	14.700	22.260	29.820	44.940
Steel HF (HF)	[N]	4.960	7.440	10.540	16.120	21.700	32.860	44.020	66.340
Stainless Steel (NIRO)	[N]	N/A	4.080	5.780	8.840	11.900	18.020	24.480	36.720
ALLOWABLE BELT FORCE									
Steel (SL)	[N]	898	1.347	1.909	2.919	3.929	5.950	7.971	12.012
Steel HF (HF)	[N]	1.101	1.652	2.340	3.579	4.818	7.295	9.773	14.728
Stainless Steel (NIRO)	[N]	N/A	1.258	1.782	2.725	3.669	5.556	7.547	11.321
ALLOWABLE EFFECTIVE FORCE / MINIMUM 12 TEETH IN MESH									
	[N]	825	1.238	1.650	2.475	3.300	4.950	6.600	9.900
BELT WEIGHT									
Steel (SL)	[kg/m]	0,05	0,08	0,10	0,15	0,20	0,31	0,41	0,61
Steel HF (HF)	[kg/m]	0,055	0,082	0,109	0,164	0,218	0,328	0,437	0,655
Stainless Steel (NIRO)	[kg/m]	N/A	0,08	0,10	0,15	0,20	0,31	0,41	0,61
SPECIFIC BELT STIFFNESS									
Steel (SL)	[N]	224.529	336.794	477.125	729.721	982.316	1.487.507	2.020.765	3.003.081
Steel HF (HF)	[N]	275.294	412.941	585.000	894.706	1.204.412	1.823.824	2.443.235	3.682.059
Stainless Steel (NIRO)	[N]	N/A	314.471	445.500	681.353	917.206	1.388.912	1.886.824	2.830.235

ENDLESS WELDED OR TRULY ENDLESS?

CONVEYING OR POWER TRANSMISSION APPLICATION?

ENDLESS WELDED BELT FOR MOST CONVEYING APPLICATIONS

- The weld has appr. 50 % of open ended belt strength.



TRULY ENDLESS BELT FOR ROTARY POSITIONING OR LIGHT POWER TRANSMISSION APPLICATIONS

TRULY ENDLESS BELT OFFER 100% TENSILE STRENGTH

- Synchro-Power Sleeve for length from 120 to 2250 mm
- Synchro-Power Flex for length from 1,5 to 22,9 m



BACKINGS

TIMING BELTS

Gates TPU offers infinite design possibilities for both open-ended and endless timing belts from over 30 different backing material options. Most belt types can be modified by adding a backing to achieve a desired coefficient of friction, abrasion resistance or cushion. Additional surface finishing achieves the required characteristic for many applications. From ground edges or surfaces and tight tolerances to punching or machining holes and slots and CNC machining of 3-dimensional contours, Gates TPU provides a range of customized solutions.

FABRICATION POSSIBILITIES

WE PROVIDE AN EXTENSIVE RANGE OF FABRICATION POSSIBILITIES, TO INCLUDE COUNTLESS COMBINATIONS OF BACKINGS IN VARIOUS MATERIAL, THICKNESS AND DIMENSIONS, THAT IS AVAILABLE UPON REQUEST.



ATTRIBUTES


- Increase or decrease in the coefficient of friction
- Various levels of cushioning and durability
- Chemical resistance
- Oil & fat resistance
- Available with FDA/EU food approval

APPLICATIONS

- Glass & Ceramics
- Packaging
- Stone processing industry
- Cardboard transport
- Wood processing industry
- Packaging industry
- Feeding and pulling applications
- Ascending conveyors







POLYURETHANE BACKINGS

Polyurethane is the most abrasion-proof, resilient and durable backing - with a variety of thickness & hardness selections available, we offer options to suit your application. Polyurethane backings are thermally bonded onto the belts to ensure a strong bond to the base belt for enhanced durability.

MATERIAL	COLOR	HARDNESS	MATERIAL THICKNESS	MINIMUM PULLEY DIAMETER FACTOR	NAME	BACKING
PU	Clear	85 Shore A	2 mm 3 mm	x 30	Taracx 85	
PU	Orange	60 Shore A	2 mm 3 mm 6 mm	x 20	Taracx 60	
PU	Green	50 Shore A	2 mm 3 mm	x 20	Taracx 50	
PU	White	92 Shore A	2 mm 3 mm	x 30	Polyurethane White	
PU	Clear	85 Shore A	5 mm	Ø 120	Glass Backing	
PU	Clear	85 Shore A	3 mm	Ø 90	Ridge Top	
PU	Clear	85 Shore A	1 mm 2 mm	x 30	HV Foil	
PU	Clear	85 Shore A 95 Shore A	2,7 mm	Ø 75	Fine Glass Backing	

RUBBER BACKINGS








Rubber backings deliver a high coefficient of friction, temperature resistance, and are commonly used within wood processing, glass processing, and ceramics industries. Rubber backings are applied by adhesive bonding to suit the material characteristics.

MATERIAL	COLOR	HARDNESS	MATERIAL THICKNESS	MINIMUM Ø/ Ø FACTOR	NAME	BACKING
NATURAL RUBBER	Red	38 Shore A	1,6 mm up to 10 mm *	x 20	Linatex™	
NATURAL RUBBER (FDA Approved)	White	38 Shore A	3 mm 5 mm 8 mm *	x 20	Linaplus FG™	
NATURAL RUBBER	Beige	40 Shore A	3 mm 6 mm *	x 20	Tan Natural Rubber	
NATURAL RUBBER	Black	65 Shore A	3 mm 5 mm 6 mm *	x 25	Nitrile Rubber	
NATURAL RUBBER	Orange	55 Shore A	3 mm 8 mm *	x 20	Linatrile™	
NATURAL RUBBER	Yellow	38 Shore A	2 mm 4 mm *	x 20	RP400	

* Several layers can be bonded together or ground for other thicknesses.

FOAM BACKINGS



Foam Backings provide high flexibility and are commonly used within glass, paper, textile, and wood processing industries. Foam Backings are applied by adhesive bonding.

MATERIAL	COLOR	HARDNESS	MATERIAL THICKNESS	MINIMUM Ø/ Ø FACTOR	NAME	BACKING
High Density Polyurethane Foam	Yellow	55 Shore A	2 mm up to 8 mm *	x 30	HD Yellow	
Polyurethane Foam	Yellow	160 kg/m3	12 mm *	x 15	Sylomer® Yellow	
Polyurethane Foam	Blue	220 kg/m3	12 mm 25 mm *	x 15	Sylomer Blue	
Polyurethane Foam	Green	300 kg/m3	6 mm 12 mm 25 mm *	x 15	Sylomer Green	
Foamed Polyurethane	Brown	400 kg/m3	6 mm 12 mm 25 mm *	x 15	Sylomer Brown	
Polyurethane Foam	Red	500 kg/m3	6 mm 12 mm 25 mm *	x 15	Sylomer Red	
Cellular Rubber	Black	150-200 kg/m3	3 mm 5 mm 10 mm *	x 15	Neoprene	
Natural Polyurethane Foam (High Flexibility)	Beige / Yellow	400 kg/m3	3 mm up to 8 mm *	x 15	Natural	

* Several layers can be bonded together or ground for other thicknesses.

PVC BACKINGS


Polyvinylchlorid (PVC) Backings are commonly used in glass and wood processing, ceramic and packaging industries. Due to various FDA / EU approvals, PVC Backings are allowed within food processing or industry applications requiring high hygiene. PVC backings are applied by adhesive bonding.

MATERIAL	COLOR	HARDNESS	MATERIAL THICKNESS	MINIMUM Ø/ Ø FACTOR	NAME	BACKING
PVC	Green	46 Shore A	4,8 mm	90 mm	Rough Top	
PVC (FDA / EU approved)	White	65 Shore A	1,2 mm	25 mm	Small Pebbles Structure	
PVC (FDA / EU approved)	White	35 Shore A	6 mm	40 mm	Large Pebbles Structure	
PVC (FDA / EU approved)	White	70 Shore A	4,5 mm	90 mm	PVC Herringbone	
PVC (FDA / EU approved)	White	40 Shore A	2,5 mm	90 mm	PVC Saw Tooth	
PVC (FDA / EU approved)	White	65 Shore A	0,7 mm	50 mm	PVC Waffle Structure	
PVC	Blue	60 Shore A	1 mm 2 mm	40 mm	PVC Blue	
PVC (FDA / EU approved)	White	65 Shore A	2 mm	40 mm	PVC White	

SPECIAL BACKINGS + FABRIC

SPECIAL BACKINGS

Gates offers additional special backings such as Novo Fleece and Chrome Leather. All special backings are applied by adhesive bonding.

MATERIAL	COLOR	HARDNESS	MATERIAL THICKNESS	MINIMUM Ø	ATTRIBUTES	NAME	APPLICATION	BACKING
POLYESTER	Anthracite	Not Measurable	1,2 mm	25 mm	Suited for high temp ranges Oil/fat resistance	General Conveying Applications Glass Processing	Novo Fleece	
LEATHER	Grey	65 Shore A	2 mm 3 mm	90 mm	High coefficient of friction Abrasion resistance Oil resistance	General Conveying Applications	Chrome Leather	

FABRIC


Polyamide fabric reduces the coefficient of friction to provide smooth & enhanced operating characteristics.

APPLICATIONS

- Accumulating conveyor
- Sliding applications

ATTRIBUTES

- Low coefficient of friction
- High wear resistance
- Good sliding attributes
- Low-noise operation
- Oil/fat resistance

MATERIAL	COLOR	CODE	BACKING
POLYAMID FABRIC ON TOOTH SIDE	Green	NT	
POLYAMID FABRIC ON BACK SIDE	Green	NB	
POLYAMID FABRIC ON TOOTH AND BACK SIDE	Green	NTB	

PROFILE BELTS

Gates TPU (Thermoplastic Polyurethane) Belts can be customized with welded profiles to meet specific application requirements. The molded profiles are made of tough polyurethane and become an integral part of the belt through thermal bonding. Profiles can be manufactured in nearly any shape and construction.

Our timing belts with welded profiles are optimal for applications in packaging, general conveying and other automation equipment applications.

CHOOSE FROM OVER 2 000 EXISTING PROFILES AVAILABLE FROM GATES' EXTENSIVE MOLD INVENTORY.



ATTRIBUTES

- Available for all standard pitches
- Non-marking, durable design
- Over 2 000 existing shapes and constructions
- Widths up to 18" / 450 mm available
- Thermal bonding process fuses belt and profile together

APPLICATIONS

- Pushing applications
- General conveying applications
- Glass conveying
- Food conveying
- Hygienic industry
- Textile industry
- Wood processing industry
- Synchronous conveying applications

FABRICATION CAPABILITIES

- Minimum length: 500 mm
- Maximum length: 25 000 mm
- Maximum width: 450 mm / 18"

Special dimensions and tolerances are available on request.



PROFILE BELT DESIGN RECOMMENDATIONS

Over 2.000 profile designs are already available from Gates' extensive mold inventory. On our website, the Gates TPU Belt Profile Selector helps to find the profile for your application. If none of the existing profiles fit, our application engineers will help you to design new, custom built profiles which will fit your application.

Ultimate performance can be achieved by following the design guidelines outlined below:


1. PROFILE SPACING

It is recommended that the profile spacing "A" correspond with the pitch of the belt. This allows the best spacing tolerances, and minimizes the effects of the belt's overall length tolerance on the profile spacing. Profiles can be spaced on non-Pitch increments. However, if non-Pitch spacing is used, the cumulative tolerance of the belt length must be considered.

PLEASE ADD THE PROFILE SPACING TOLERANCE OF ± 0.2 MM TO CALCULATE THE PROFILE SPACING "A" AS FOLLOWS:

Example

Profile Spacing Tolerance for pitch type T10: $\pm 0,54$ mm
 Profile Spacing "A" (notional value): 1.000 mm
 Resultant positional tolerance: 1.000 mm $\pm 0,74$ mm for pitch type T10



**TIGHTER TOLERANCES FOR PROFILE SPACING ARE AVAILABLE.
 PLEASE CONTACT GATES APPLICATIONS ENGINEERING FOR DETAILED INFORMATION.**

PITCH TOLERANCE FOR ALL BELT TYPES

T / STD / Imperial Pitches	$\pm 0,54$ mm per m
AT / HTD / GPP / HPL	+ 0,27 mm / - 0,54 mm per m

2. PROFILE DIMENSIONS

The most important considerations while dimensioning a profile are the size of the base of the profile ("foot" of the profile) and the position of the profile on the belt. The profile thickness can affect the flexibility of the belt, and can determine the minimum allowable pulley diameter. The flexibility of the belt can be maximized, however, by positioning the profile directly over the tooth of the belt. As the thickness of the foot of the profile increases, the minimum pulley diameter in the system must be increased according to the table below:

TOLERANCES

Profile Width Profile Length	$\pm 0,25$ mm / $\pm 0,01$ " $\pm 0,25$ mm / $\pm 0,01$ "
The height tolerance of a profile in consequence of the fusion of the profile and belt at the welding area	+0,25 mm / - 0,5 mm + 0,01" / - 0,02"



MINIMUM NUMBER OF TEETH OF PULLEY FOR PROFILES LOCATED OVER TOOTH

PROFILE FOOT THICKNESS (MM)	2	3	5	6	8	10	11	13	16	19
PROFILE FOOT THICKNESS (INCH)	1/16	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
XL	10	10	18	25	40	50	60	100	---	---
L	12	12	12	18	30	40	50	60	100	---
H / H-HF	14	14	14	14	18	25	35	45	80	100
XH	18	18	18	18	18	18	18	20	35	50
T5	12	12	18	25	40	50	60	100	---	---
AT5 / ATL5	15	15	18	25	40	50	60	100	---	---
T10 / T10-HF	14	14	16	16	18	25	35	45	80	100
AT10	15	15	18	18	22	25	35	45	80	100
ATL10 / ATL10-HF	25	25	25	25	25	25	35	45	80	100
T20 / AT20	18	18	18	18	18	18	18	20	35	50
ATL20	30	30	30	30	30	30	30	30	35	50
HTD5 / STD5 / HPL5	14	14	16	25	40	50	60	100	---	---
HTD8 / STD8 / HPL8 / GPP8	20	20	20	24	30	40	50	60	100	---
HTD14	28	28	28	28	28	28	30	30	50	72
HTDL14 / GPP14	43	43	43	43	43	43	43	43	50	72

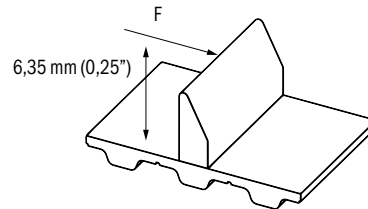
MINIMUM NUMBER OF TEETH OF PULLEY FOR PROFILES NOT LOCATED OVER TOOTH

PROFILE FOOT THICKNESS (MM)	2	3	5	6	8	10	11	13	16	19
PROFILE FOOT THICKNESS (INCH)	1/16	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
XL	12	30	45	50	60	100	---	---	---	---
L	12	20	40	45	55	60	70	80	100	---
H / H-HF	14	14	25	30	45	50	55	65	80	100
XH	18	18	20	30	40	45	50	54	58	60
T5	12	30	45	50	60	100	---	---	---	---
AT5 / ATL5	15	30	45	50	60	100	---	---	---	---
T10 / T10-HF / AT10	18	20	30	40	45	50	55	65	80	100
ATL10 / ATL10-HF	25	25	30	40	45	50	55	65	80	100
T20 / AT20	18	18	20	30	40	45	50	54	58	60
ATL20	30	30	30	30	40	45	50	54	58	60
HTD5 / STD5 / HPL5	18	30	45	50	60	100	---	---	---	---
HTD8 / STD8 / HPL8 / GPP8	20	20	40	45	55	60	70	80	100	---
HTD14	28	28	30	42	58	64	72	78	82	86
HTDL14 / GPP14	43	43	43	43	58	64	72	78	82	86

* Not available

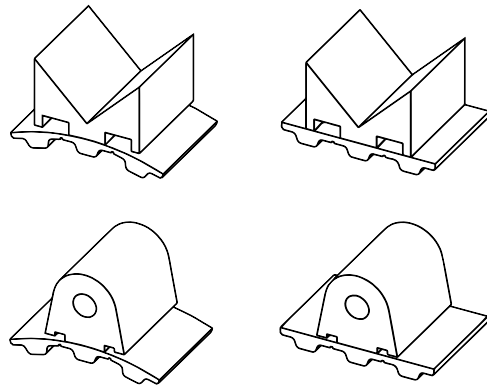
3. PROFILE STRENGTH

The strength, and therefore the capacity of the profile depends primarily on the size of the welded profile foot. The strength of the profile is affected by the type and direction of the force applied to it. Under high loads, the failure mode will normally be either bending or distortion of the profile and belt, or in some cases, the polyurethane may actually tear. The strength of the profile is approximately 6 N/mm² according to the drawing opposite.



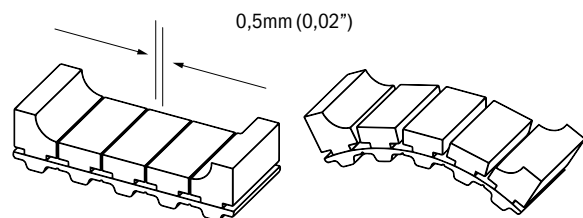
4. WIDE BASE PROFILES OR PROFILES WITH RELIEF

For profiles requiring a wide base, such as pushers, one foot should be left unwelded. This allows for flexing around the pulley yet it remains rigid when loaded.



5. SEGMENTED PROFILES

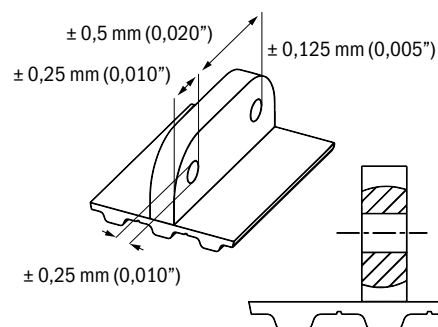
If large profiles are required as carriers, then it is necessary, that they are either segmented or slotted.



6. PROFILES WITH HOLES

Profiles with holes for securing paddles or other attachments can be produced. Holes are either drilled before bonding, or are molded into the profile depending upon the volume and requirements of the application. Tolerances of the hole placement depends upon whether the holes are drilled or molded.

The tolerance of the hole from the belt surface is subject to the bonding process of the profile foot and the belt surface. Generally, tolerances are as shown on the right-hand side.






7. PROFILES WITH INSERTS

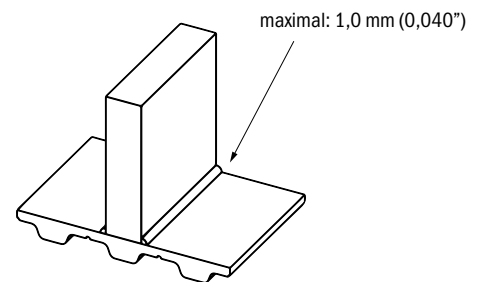
Profiles can be molded with metallic inserts. These are particularly useful in some applications to replace roller chains with attachments.

The actual inserts can either be manufactured by Gates or provided by the customer.




8. FLASH BEAD

The welding process can cause a weld bead of polyurethane between belt back and the lower profile edge. This can be removed on customer request.



9. PERPENDICULARITY

All profiles are perpendicular to $\pm 1^\circ$.



10. ORDERING

When ordering a profiled belt, it is advisable to submit a drawing of the profiled belt. For your convenience standard drawing forms are available from our Applications Engineering Department. Once a design is finalized, Gates will submit the drawing to the customer for approval. This custom belt drawing number should be used for future ordering.

PROFILE SELECTOR

OUR ONLINE PROFILE SELECTOR TOOL ALLOWS YOU TO:

- Find the right profile for your application
- Download of drawings for each selection
- Review minimum pulley recommendations
- Go to our website: www.gates.com/tpu
- Access the Profile Selector at <https://www.gates.com/us/en/knowledge-center/engineering-applications/gates-tpu-belt-profile-selector.html>

PLEASE CONTACT OUR APPLICATIONS ENGINEERING GROUP FOR SPECIAL PROFILE SHAPES, DIMENSIONS OR TOLERANCES.

The screenshot displays the Gates TPU Belt Profile Selector web application. At the top, there is a navigation bar with the Gates logo, a search bar, and links for 'CONTACT US', 'WHERE TO BUY', and 'EN'. Below the navigation bar, there are dropdown menus for 'Products By CATEGORY', 'INDUSTRY', and 'APPLICATION'. A 'VEHICLE PARTS SEARCH' button is also present.

The main content area is titled 'Gates TPU™ Belt Profile Selector' and shows '250+ results'. On the left side, there is a sidebar with filters: 'Account Number', 'Search By Profile Number or Keyword', and a list of filter categories: 'Shape', 'Features', 'Dimensions', and 'Other'.

The main display area shows a grid of 10 belt profile options, each with a 3D model, a profile number, a shape name, and a table of dimensions and features.

Profile Number	Shape	Length (mm)	Height (mm)	Thickness (mm)	Weld Foot (mm)	Features
AN1001	TRAPEZOID	330.2	12.7	6.4	6.4	NONE
AN1002	TRAPEZOID	330.2	15.9	6.4	6.4	NONE
AN1003	OTHERS	330.2	15.9	9.5	9.5	NONE
AN1004	TRIANGLE	330.2	25.4	9.5	9.5	NONE
AN1005	OTHER RECTANGLE	254.0	38.1	6.4	6.4	NONE
AN1006	TRAPEZOID	304.8	19.8	19.1	19.1	NONE
AN1007	TRAPEZOID	304.8	10.3	19.1	19.1	NONE
AN1008	TRIANGLE	304.8	21.6	17.5	4.8	SUPPORT LEG - BACK ONLY
AN1009	OTHER RECTANGLE	304.8	44.5	28.035	6.4	NONE
AN1010	TRAPEZOID	279.4	3.2	10.1	10.1	NONE

FABRICATION CAPABILITIES

Gates TPU offers further finishing for belts to achieve a variety of application requirements. From ground edges or surfaces and tight tolerances to punching or machining holes and slots and CNC machining of 3-dimensional contours, Gates TPU provides a range of customized solutions.

Milling:

Length	500 mm up to 52.000 mm
Width	10 mm up to 450 mm

Punching/CNC Machining:

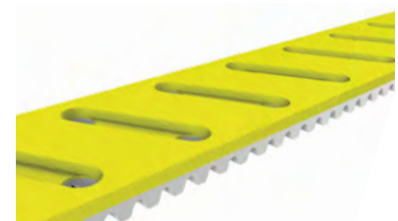
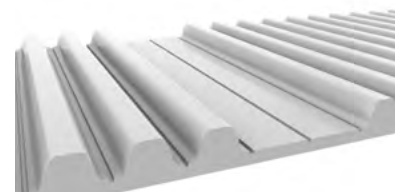

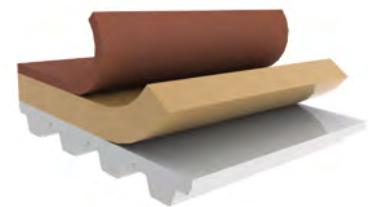
Length	500 mm up to 30.000 mm
Width	10 mm up to 450 mm
Min. Hole Diameter:	1 mm
No max. Hole Diameter	

Grinding:

Length	420 mm up to 50.000 mm
Width	10 mm up to 250 mm

Removing individual teeth

Slotting	The flexibility can be increased by cross grooving thick coatings
----------	---



OUR APPLICATION ENGINEERS WILL HELP YOU WITH YOUR CUSTOM REQUIREMENTS.

ADVANTAGES

- Unlimited adaptability for nearly all dimensions, contours and configurations
- Combination of flexible base belt manufacturing and additional fabrication in one hand

EXAMPLE OF USE

- Vacuum belts for precise transportation of light weight goods such as paper sheets or films
- Conveying for automotive production applications

TECHNICAL DESIGN

In order to ensure the design of proper belt drive systems, we provide technical data and equations to aid in the necessary calculations. For any questions regarding the information and/or data within this section, please contact our application engineers.

a	Acceleration [m/s^2]	l	Gauge Length during Frequency Measurement [mm]
β	Angle of Inclination [$^\circ$]	L_1	Tight Side Length [mm]
C_R	Overall Stiffness [N]	L_2	Slack Side Length [mm]
C_{sp}	Belt Stiffness [N]	m	Mass [kg]
d	Diameter	m_a	Mass of accumulated Good [kg]
Δx	Elongation [mm]	m_b	Mass of Belt [kg/m]
Δx_{pos}	Positional Deviation [mm]	m_c	Mass of Counter Weight [kg]
f	Frequency [Hz]	m_t	Mass of Transported Goods [kg]
F_1	Tight Side Belt Force [N]	μ	Coefficient of Friction between Belt and Support
F_{1all}	Allowable Belt Force [N]	μ_b	Coefficient of Friction between Belt and Transported Material
F_{1max}	Maximum occurring Belt Force [N]	n	Speed [1/min]
F_{2opt}	Optimal Slack Side Force [N]	p	Vacuum [N/m^2]
F_a	Acceleration Force [N]	P_M	Motor Power on Output Shaft [kW]
F_{break}	Breaking Force [N]	P_N	Nominal Power [kW]
F_e	Effective Force [N]	d_{Pulley}	Diameter of Driver Pulley [mm]
F_{eall}	Allowable Effective Force [N]	S_{Break}	Safety Factor on Breaking Force
$F_{eallapp}$	Maximum Allowable Effective Force Application [N]	S_{F1}	Safety Factor on allowable Belt Force
F_f	Friction Force [N]	S_{Fe}	Safety Factor on allowable Effective Force
F_{fa}	Friction Force during Accumulation [N]	S_f	Safety Factor
F_{fv}	Friction Force due to Vacuum [N]	t_m	Tooth in Mesh Factor
F_g	Gravitational Force [N]	T	Torque [Nm]
F_{pre}	Force for Pretensioning [N]	T_M	Torque of Motor Output Shaft [Nm]
F_w	Externally applied Working Force [N]	t_v	Speed Factor
g	Gravitational Acceleration [m/s^2]	v	Speed [m/s]
L	Timing Belt Length [mm]	z_m	Teeth in Mesh



A) SAFETY FACTOR

Uniform loads do not require a safety factor. However, in the case of alternating, shock, accelerating, or decelerating loads a suitable safety factor should be considered.

LOAD	Safety Factor Sf
LOW ALTERNATING LOAD	1,2 - 1,5
MEDIUM ALTERNATING LOAD	1,5 - 1,8
HEAVY ALTERNATING LOAD	1,8 - 2,2

Table 1

B) TOOTH IN MESH FACTOR t_m SPEED FACTOR t_v

TEETH IN MESH	TEETH IN MESH FACTOR
Z_e	t_m
3	0,25
4	0,33
5	0,42
6	0,50
7	0,58
8	0,67
9	0,75
10	0,83
11	0,92
12	1,00

Table 2

SPEED [M/S]	SPEED FACTOR
v	t_v
0	1,00
0,25	0,97
0,5	0,93
0,75	0,89
1	0,86
1,5	0,82
2	0,77
2,5	0,74
3	0,71
3,5	0,68
4	0,66
4,5	0,63
5	0,61
6	0,58
7	0,56
8	0,53
9	0,51
10	0,49
11	0,47
13	0,44
15	0,42
16	0,40
18	0,38
20	0,35

Table 3

C) BRAKING / EMERGENCY STOP

Belt type and width selection is based on the calculated effective force at the driver pulley, F_e , and the calculated tight side force (tension), F_1 . F_e and F_1 should be calculated for peak load conditions, such as emergency braking, as well as for normal operating conditions. The following section illustrates how F_e and F_1 are calculated for various applications.

CALCULATION OF CONVEYING APPLICATIONS

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configurations. To determine the effective force please use the method for conveying as follows:

$$F_e = \sum F_{\text{Resistance}}$$

I. FRICTION FORCE F_f

The friction force between the timing belt and the slider bed due to the weight of the conveyed good that is normal (perpendicular) to the direction of conveyance.

$$F_f = \mu \times g \times m_f \times \cos \beta$$

II. FRICTION FORCE DURING ACCUMULATION F_{Fa}

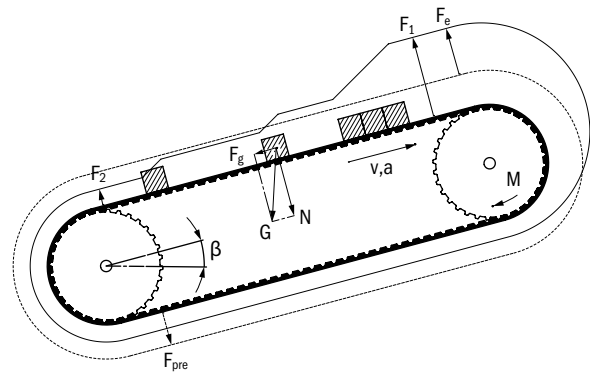
The friction force between the timing belt, slider bed and the conveyed material due to the mass component of the accumulated material vertically to the direction of conveyance.

$$F_{Fa} = (\mu + \mu_a) \times g \times m_a \times \cos \beta$$

III. GRAVITATIONAL FORCE F_g

Force to lift the material being transported on an inclined conveyor.

$$F_g = m_f \times g \times \sin \beta$$



IV. ACCELERATION FORCE F_a

Force to accelerate the mass of the conveyed good.

$$F_a = m_f \times a$$

V. ADDITIONAL FORCES

Motion resistance resulting from the belt or idler mass, or other components are typically insignificant. If these additional forces are considered significant relative to the initial F_e calculated, they need to be calculated and added to F_e .

TECHNICAL DATA -COEFFICIENT OF FRICTION

- Polyurethane vs. Steel dry 0,5 up to 0,7
- Polyurethane vs. Aluminum dry 0,5 up to 0,6
- Polyurethane vs. UHMWPE dry 0,2 up to 0,4
- Polyamide vs. Steel dry 0,2 up to 0,4
- Polyamide vs. UHMWPE dry 0,1 up to 0,3



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1...0,3) \times F_e$$

Higher values are recommended for longer belt lengths.

Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_1 / L$$

C) CALCULATION OF TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force results as follows (application moving at full load):

$$F_1 = F_e + F_{pre}$$

D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force Applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_f

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE BELT FORCE S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ULTIMATE TENSILE STRENGTH S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF LINEAR POSITIONING APPLICATIONS

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configurations.

$$F_e = \sum F_{\text{Resistance}}$$

I. ACCELERATION FORCE F_a

Force to accelerate the loaded slide with mass m_f .

$$F_a = m_f \times a$$

II. FRICTION FORCE F_f

The friction force of the linear rail / bearing system.

$$F_f = \mu \times g \times m_f \times \cos\beta$$

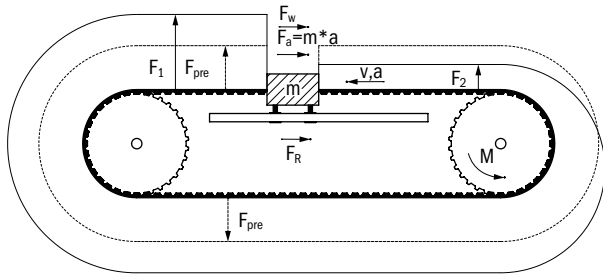
III. GRAVITATIONAL FORCE F_g

Force to lift the loaded slide with mass m_f on an inclined linear actuator.

$$F_g = m_f \times g \times \sin\beta$$

IV. ADDITIONAL FORCES

Motion resistance resulting from the belt or idler mass, or other components are typically insignificant. If these additional forces are considered significant relative to the initial F_e calculated, they need to be calculated and added to F_e .



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1...0,3) \times F_e$$

Higher values are recommended for longer belt lengths. Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_1/L$$



C) CALCULATION OF TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force results as follows (application moving at full load):

$$F_1 = F_e + F_{pre}$$

D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_F

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF OMEGA LINEAR POSITIONING APPLICATIONS

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configurations.

$$F_e = \sum F_{\text{Resistance}}$$

I. ACCELERATION FORCE F_a

Force to accelerate the loaded slide with mass m_f .

$$F_a = m_f \times a$$

II. FRICTION FORCE F_f

The friction force of the linear rail / bearing system.

$$F_f = \mu \times g \times m_f \times \cos\beta$$

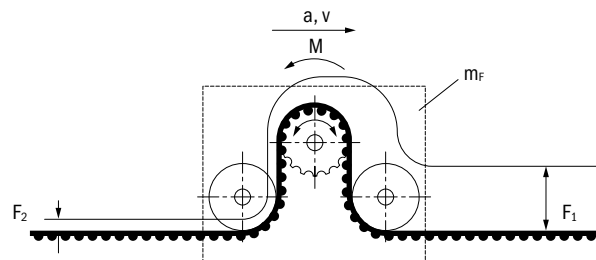
III. GRAVITATIONAL FORCE F_g

Force to lift the loaded slide with mass m_f on an inclined linear actuator.

$$F_g = m_f \times g \times \sin\beta$$

IV. ADDITIONAL FORCES

Motion resistance resulting from the belt or idler mass, or other components are typically insignificant. If these additional forces are considered significant relative to the initial F_e calculated, they need to be calculated and added to F_e .



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1...0,3) \times F_e$$

Higher values are recommended for longer belt lengths. Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_1/L$$



C) CALCULATION OF TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force results as follows (application moving at full load):

$$F_1 = F_e + F_{pre}$$

D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_F

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCES S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF LIFTING APPLICATIONS: TWO PULLEYS NO COUNTER WEIGHT

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configuration.

$$F_e = \sum F_{\text{Resistance}}$$

I. GRAVITATIONAL FORCE F_g

Force to lift the loaded slide with mass m .

$$F_g = m \times g$$

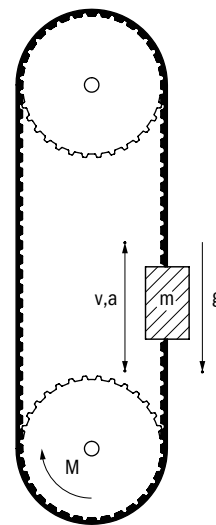
II. ACCELERATION FORCE F_a

Force to accelerate the loaded slide with mass m .

$$F_a = m \times a$$

III. ADDITIONAL FORCES

An estimate of the frictional forces that resist the belt motion should be added to the sum of the above calculated forces to determine the effective force F_e . Motion resistance resulting from the belt or idler mass, or other components are typically insignificant. If these additional forces are considered significant relative to the initial F_e calculated, they need to be calculated and added to F_e .



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1...0,3) \times F_e$$

Higher values are recommended for longer belt lengths. Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_1/L$$



C) CALCULATION OF TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force results as follows (Conveyor moving at full load):

$$F_1 = F_e + F_{pre}$$

D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force Applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_f

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCE S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE BELT FORCE S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ULTIMATE TENSILE STRENGTH S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF LIFTING APPLICATIONS: TWO PULLEYS WITH COUNTER WEIGHT

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configuration.

$$F_e = \sum F_{\text{Resistance}}$$

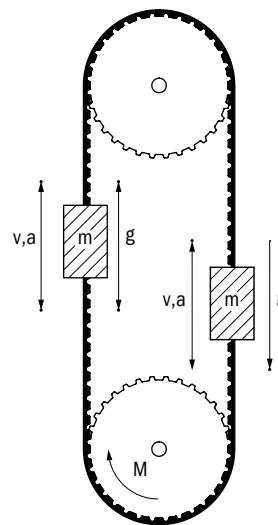
I. ACCELERATION FORCE F_a

Force to accelerate the loaded slide with mass m .

$$F_a = m \times (g + a) - m_c \times (g - a)$$

II. ADDITIONAL FORCES

An estimate of the frictional forces that resist the belt motion should be added to the sum of the above calculated forces to determine the effective force F_e . Motion resistance resulting from the belt or idler mass, or other components are typically insignificant. If these additional forces are considered significant relative to the initial F_e calculated, they need to be calculated and added to F_e .



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1...0,3) \times F_e$$

Higher values are recommended for longer belt lengths. Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_{1max}/L$$



C) CALCULATION OF TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force results as follows (lifter moving at full load):

$$F_1 = F_e + F_{pre}$$

D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force Applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_f

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCE S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE BELT FORCE S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ULTIMATE TENSILE STRENGTH S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF LIFTING APPLICATIONS: ONE PULLEY WITH COUNTER WEIGHT

A) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e at the driver pulley is derived from the sum of all individual forces resisting the belt motion. The individual loads contributing to the effective force must be identified and calculated based on the loading conditions and drive configuration.

$$F_e = \sum F_{\text{Resistance}}$$

I. ACCELERATION FORCE F_a

Force to accelerate the loaded slide with mass m .

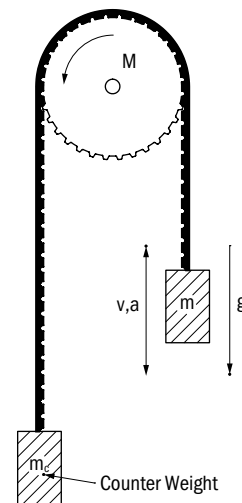
$$F_a = m \times (g + a) - m_c \times (g - a)$$

II. FRICTION FORCE F_f

The friction force of the linear rail / bearing system.

III. ADDITIONAL FORCES

Motion resistance on the basis of belt mass, idler or similar are normally insignificant, but may have a decisive influence on the total value of the effective force and therewith on the belt load as well. The importance of mentioned influences has to be estimated throughout the calculations – in extreme cases the component forces must be calculated and considered.



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

Not available for lifting applications with counter weight and one pulley.

C) CALCULATION ON TIGHT SIDE BELT FORCE F_1

In the worst case the light side belt force results as follows (conveyor moving at full load):

$$F_1 = m \times (g + a) + F_f$$



D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force Applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_f

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCE S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE BELT FORCE S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ULTIMATE TENSILE STRENGTH S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.

CALCULATION OF CLOSED BELT APPLICATIONS

Power transmission drives should always be designed with truly endless Synchro-Power Belts or Synchro-Power Flex belts.

The use of endless welded timing belts is not recommended.

A) CALCULATION OF NOMINAL POWER

The nominal Power is used for the calculation of the required belt width

$$P_N = P_M \times S_f \quad S_f \text{ is found in table 1}$$

B) CALCULATION OF EFFECTIVE FORCE F_e

The effective force F_e can be calculated with the existing movement resistance as follows:

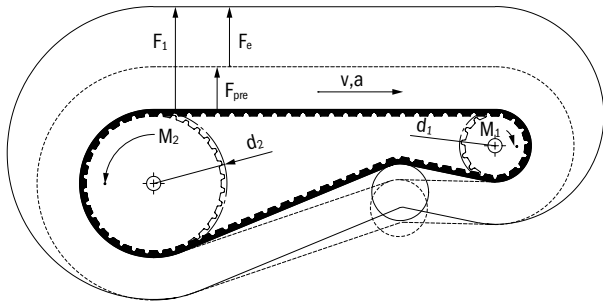
$$F_e = \sum F_{\text{Resistance}}$$

Furthermore the effective force can also be calculated with the existing driving power as follows:

$$F_e = S_f \times (T_M \times 2000) / d$$

or

$$F_e = S_f \times (19100 \times P_N \times 1000) / n \times d$$



B) CALCULATION OF FORCE FOR PRE-TENSIONING F_{pre}

For trouble-free operation, it is necessary that the slack side does not fall below a certain tension. The pre-tension prevents jumping of the pulley teeth during belt operation. In order to collect the pre-tension, the optimal slack side force has to be ascertained as follows:

$$F_{2opt} = (0,1 \dots 0,3) \times F_e$$

Higher values are recommended for longer belt lengths. Assuming an optimal slack side force, the force for pre-tensioning is calculated considering the tight side length L_1 and the total timing belt length L as follows:

$$F_{pre} = F_{2opt} + F_e \times L_1 / L$$

C) CALCULATION ON TIGHT SIDE BELT FORCE F_1

In the worst case the tight side belt force F_1 results as follows (application moving at full load):

$$F_1 = F_e + F_{pre}$$



D) BELT SELECTION

The selection of the belt type and width is determined by comparing the above calculated values, F_e and F_1 , to our catalog values. After making an initial selection of a belt type, determine the number of teeth that are constantly engaged in the pulley. For example, a belt that is wrapped 180° around a pulley with 20 teeth has 10 teeth engaged in that pulley. If less than 12 teeth are engaged, the allowable effective force F_{eall} must be corrected with a tooth-in-mesh factor t_m which is found in table 2. In addition to correcting for teeth in mesh, the allowable effective force F_{eall} also needs to be corrected by applying a speed factor t_v which can be found in table 3. The result is a maximum allowable effective Force Applied as follows:

$$F_{eallapp} = F_{eall} \times t_m \times t_v$$

$F_{eallapp}$ and F_{1all} should be larger than the actual prevailing forces in the application.

$$F_{eallapp} > F_e$$

$$F_{1all} > F_1$$

E) CALCULATION OF SAFETY FACTOR S_f

I. SAFETY FACTOR ON ALLOWABLE EFFECTIVE FORCE S_{iFe}

$$S_{iFe} = F_{eallapp} / F_e$$

II. SAFETY FACTOR ON ALLOWABLE BELT FORCE S_{iF1}

$$S_{iF1} = F_{1all} / F_1$$

III. SAFETY FACTOR ON ULTIMATE TENSILE STRENGTH S_{iBreak}

$$S_{iBreak} = F_{Break} / F_1$$

Both calculated allowable safety factors S_{iFe} and S_{iF1} should be higher than required safety factor found in table 1 depending on the type of load.



9. ELONGATION / POSITIONING ERROR IN TIMING BELT DRIVES

A) ELONGATION Δx

The static elongation based on an applied force such as the pre-tension results as follows:

$$\Delta x = F \times L / C_{sp}$$

B) POSITIONING ERROR Δx_{Pos}

The positioning error mainly depends on the total stiffness C_R of the slack and tight side.

$$C_R = C_{sp} \times L / L_1 \times L_2$$

Note that C_R is at its minimum when the tight and slack sides are equal.

Determine the positioning error Δx_{Pos} due to belt elongation caused by e.g. the effective force F_e :

$$\Delta x_{Pos} = F / C_R$$

10. TIMING BELT INSTALLATION

A) PRETENSION

For proper adjustment of pre-tensioning F_{pre} Gates recommends the Sonic Tension Meter 508 C which directly specifies the pre-tension in Newton.

Alternatively with the tension meter you may measure the belt frequency of the sonic wave that is generated by vibrating the belt span of the stationary belt.

The desired frequency can be calculated as follows:

$$f = \sqrt{\frac{F_{pre} \times 10^6}{4 \times m_b \times l^2}}$$

B) PRETENSION INSTALLATION RECOMMENDATION

Please refer to the Gates Sonic Tension Meter Manual.

The timing belt should be first installed without any tension. Apply the calculated pre-tension to the belt by using the tensioning device. When measuring the belt tension, turn the drive over for several revolutions to fully seat the belt into the pulleys and equalize tension in all of the spans. Repeat the tension measurements at different pulley positions. After applying the pretension, lock all adjustable shafts into place.

SONIC TENSION METER

Our selection of time-saving tools are a technician's best friend and a facility manager's trusted companion. Gates professional tools offer simple solutions for quick onsite and equipment inspection, maintenance and repairs, backed by the Gates guarantee of world-class quality and reliable long-term performance.



MOD. 308C
PRODUCT #7420-00100



MOD. 550C
PRODUCT # 7420-00550



NOTES

Notes section containing 25 horizontal lines for writing.



The specifications listed are based on Gates experience. However, our specifications and data do NOT cover all possible belts drive conditions. It is the responsibility of the belt drive system designer to ensure Gates belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damage or consequential damages associated with the use of our products.

Do ot use Gates belts in applications that depend solely upon the belt to raise/lower, support or sustain a mass without an independent safety backup system. Gates products are not suitable for applications in aircraft.

ALL INFORMATION CONTAINED ARE SUBJECT TO CHANGE WITH OUT NOTICE.



DRIVEN BY POSSIBILITY™

GATES TPU GMBH
WERNER VON SIEMENS STRASSE 2
64319 PFUNGSTADT, GERMANY
TEL. +49 (0) 6157-9727-0
EMAIL: SALES-PFUNGSTADT@GATES.COM